

WIRING DIAGRAMS

High **PROTEC** | PROTECTION TECHNOLOGY
MADE SIMPLE

MRM4 | Motor Protection


Version: 3.11

Original document

English

This document does not replace the Technical Manual.


MRM4-2A0AAA

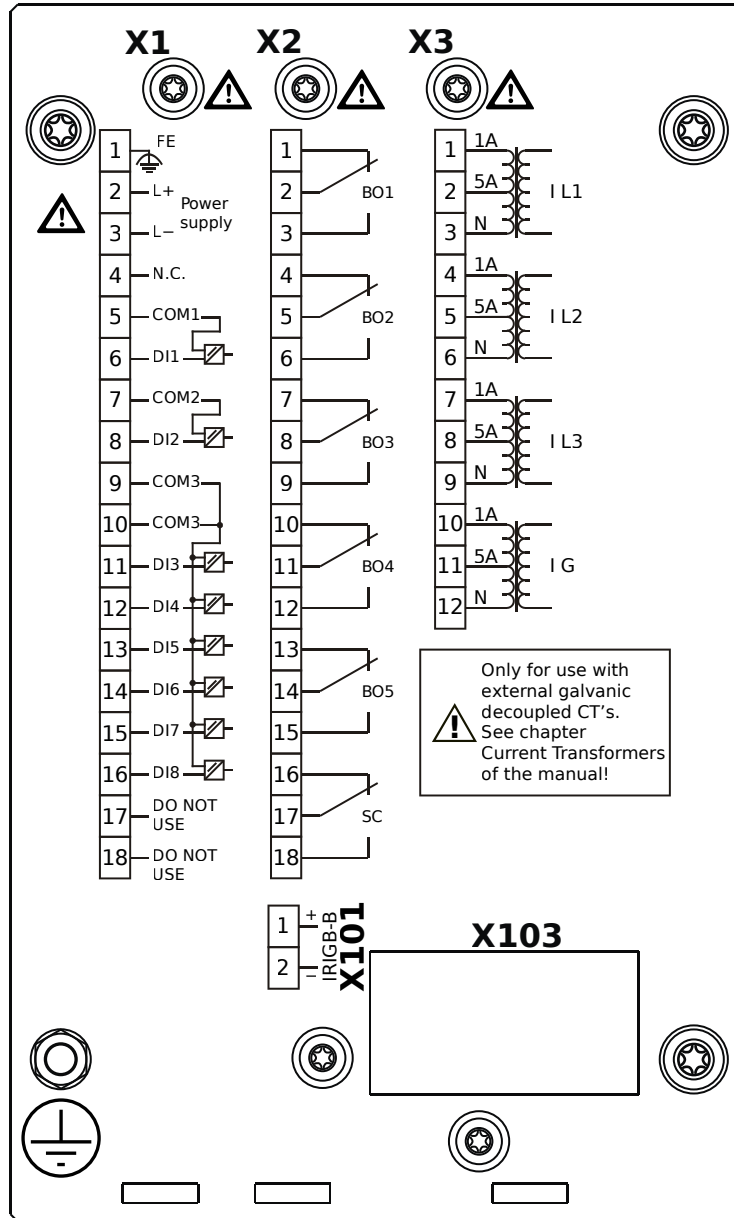

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X

MRM4-2A0AAB

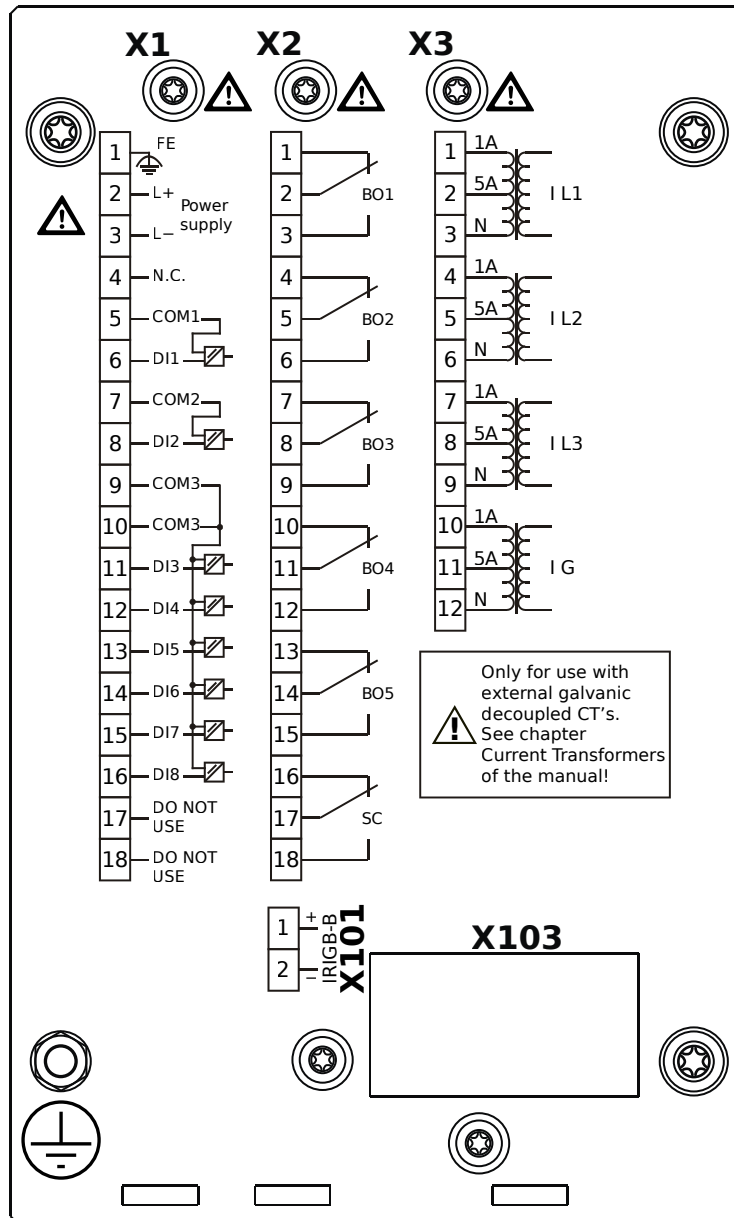


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X


MRM4-2A0ABA

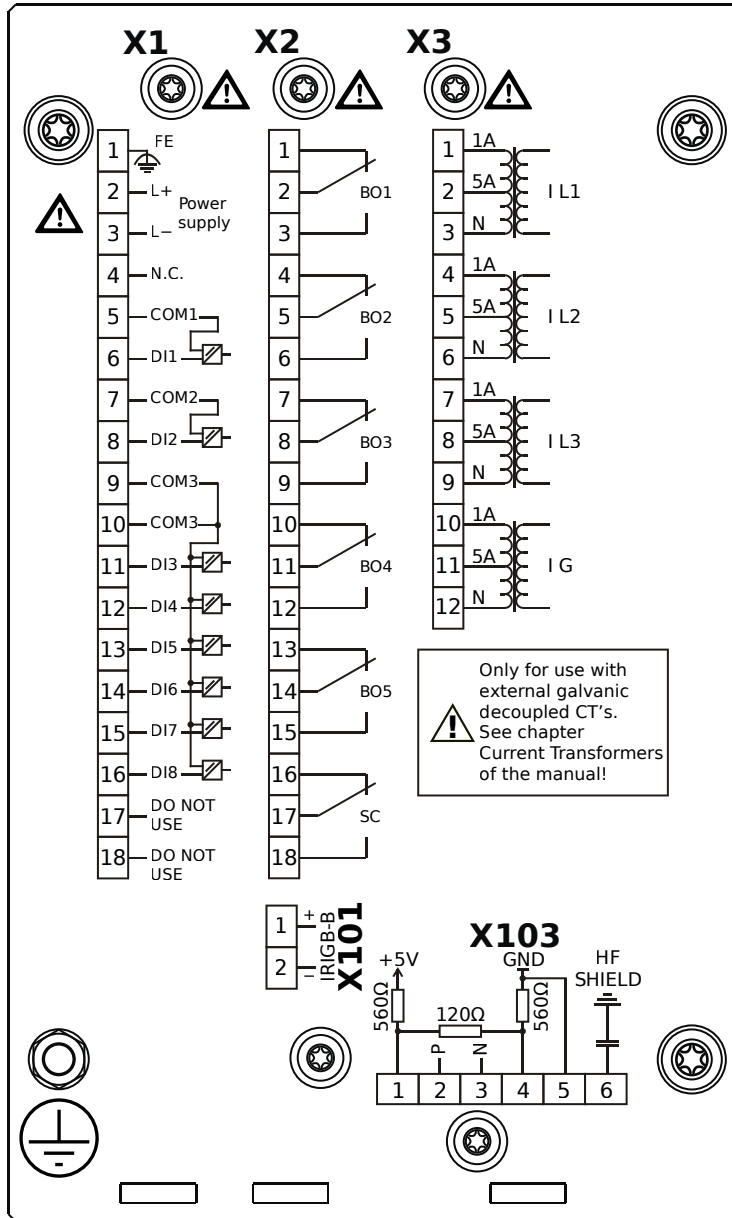

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2A0ABB

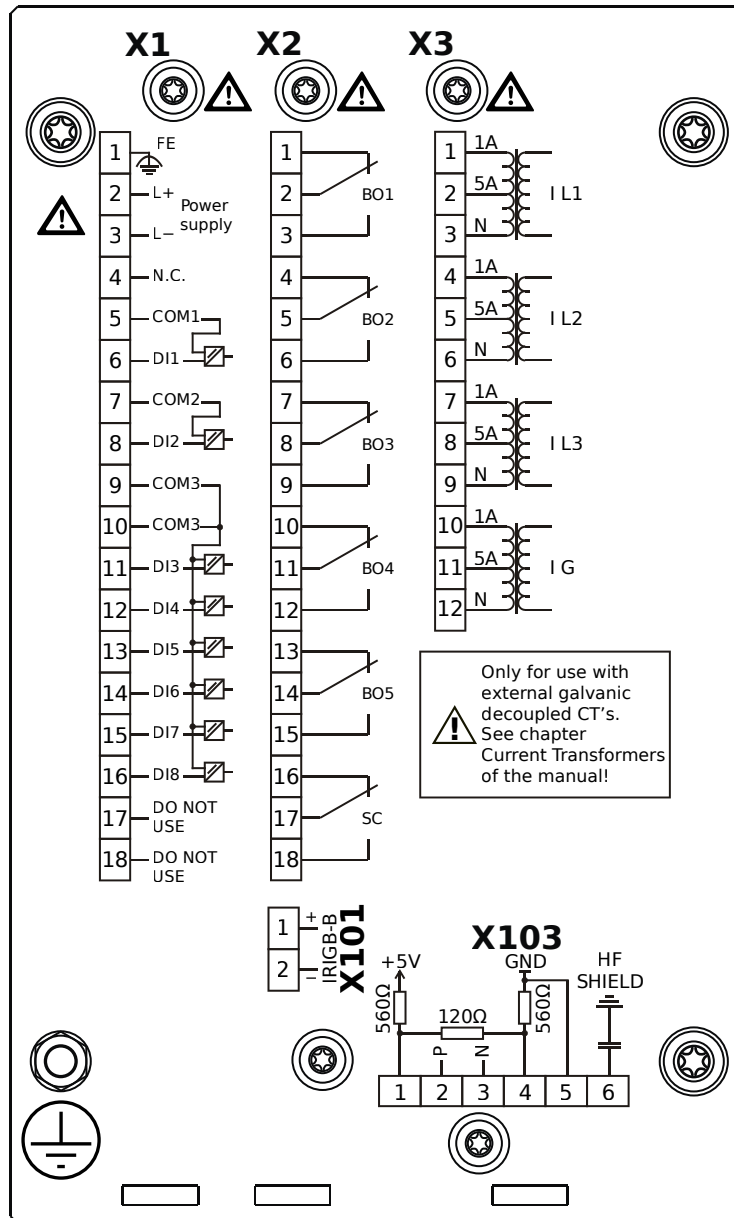


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals


MRM4-2A0ACA

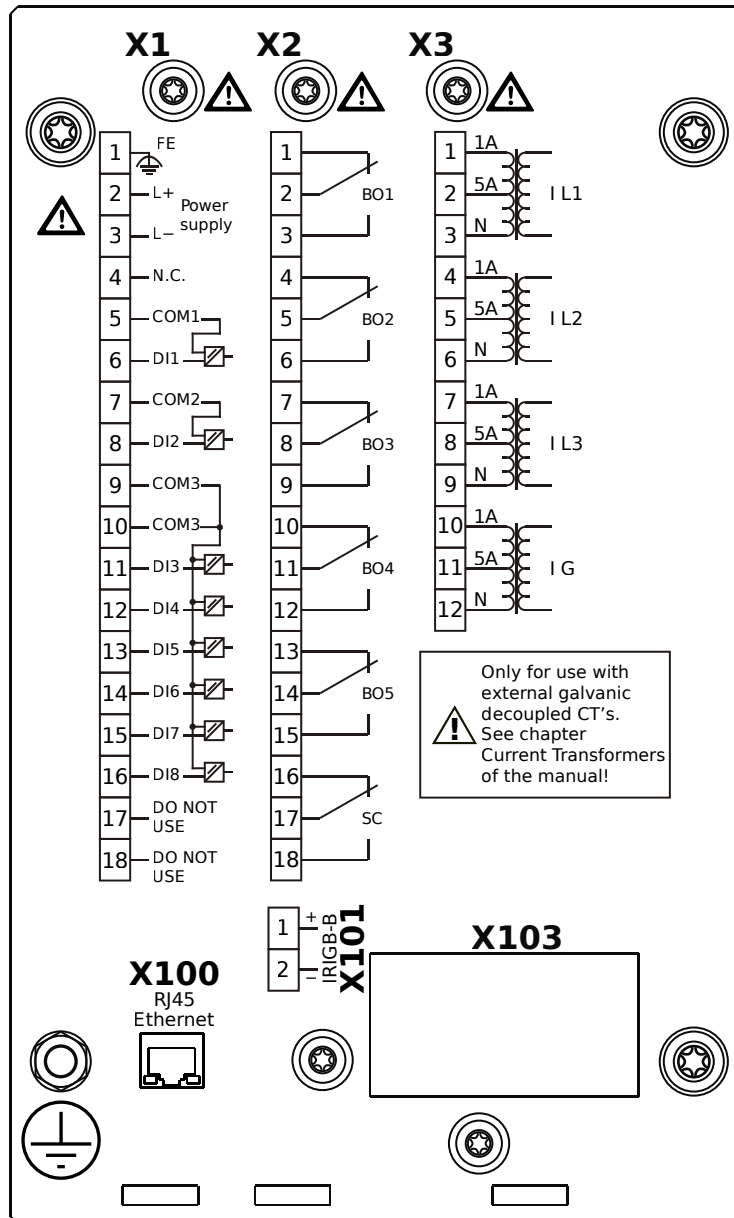

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X

MRM4-2A0ACB

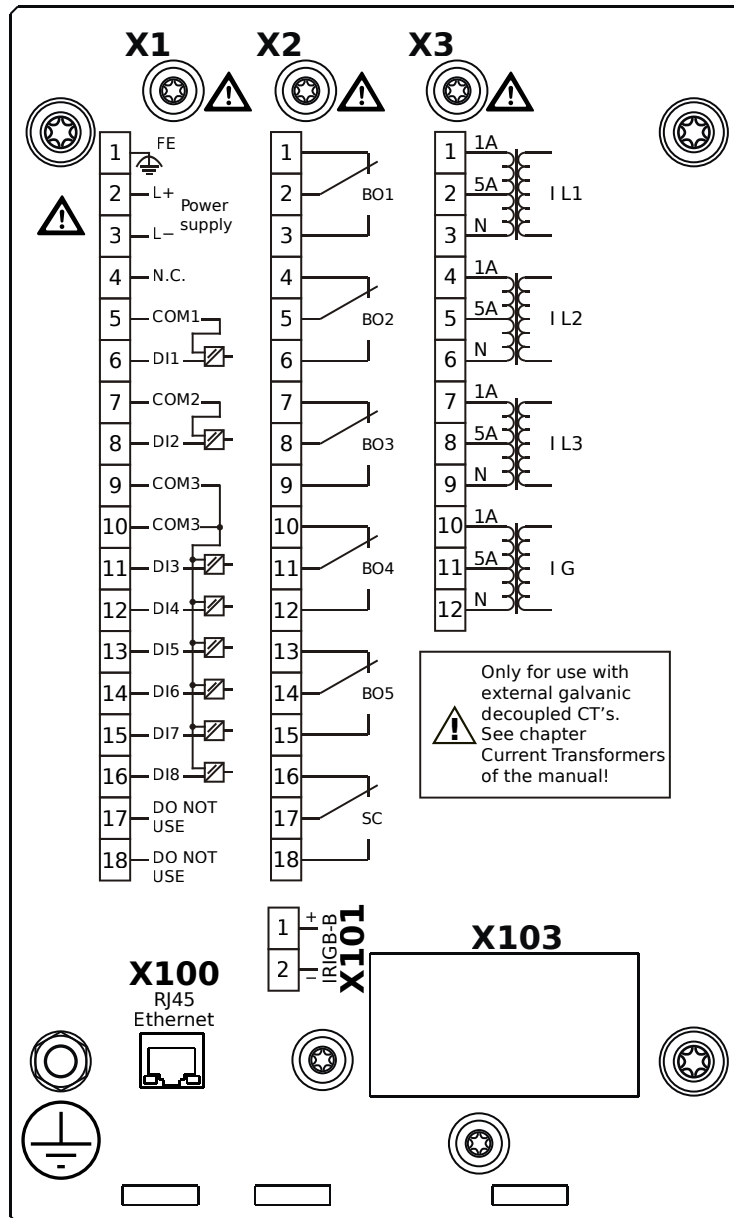

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – IRIG-B00X


MRM4-2A0ADA

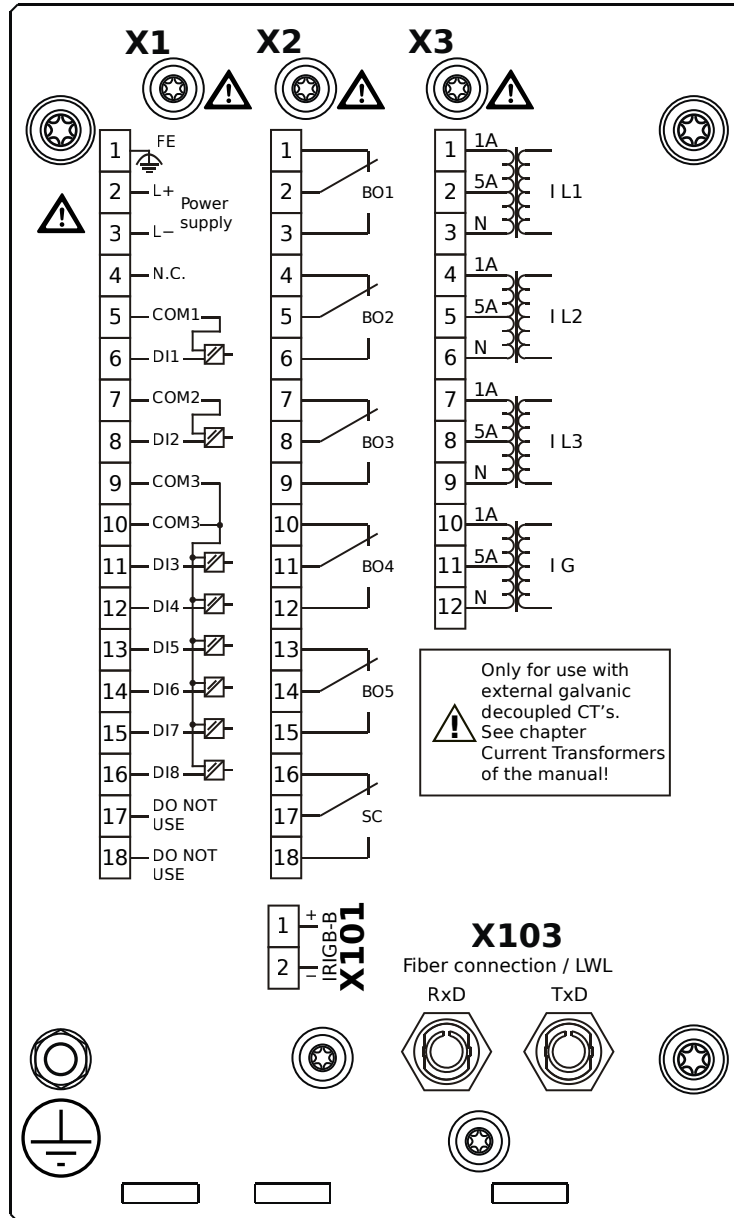

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2A0ADB

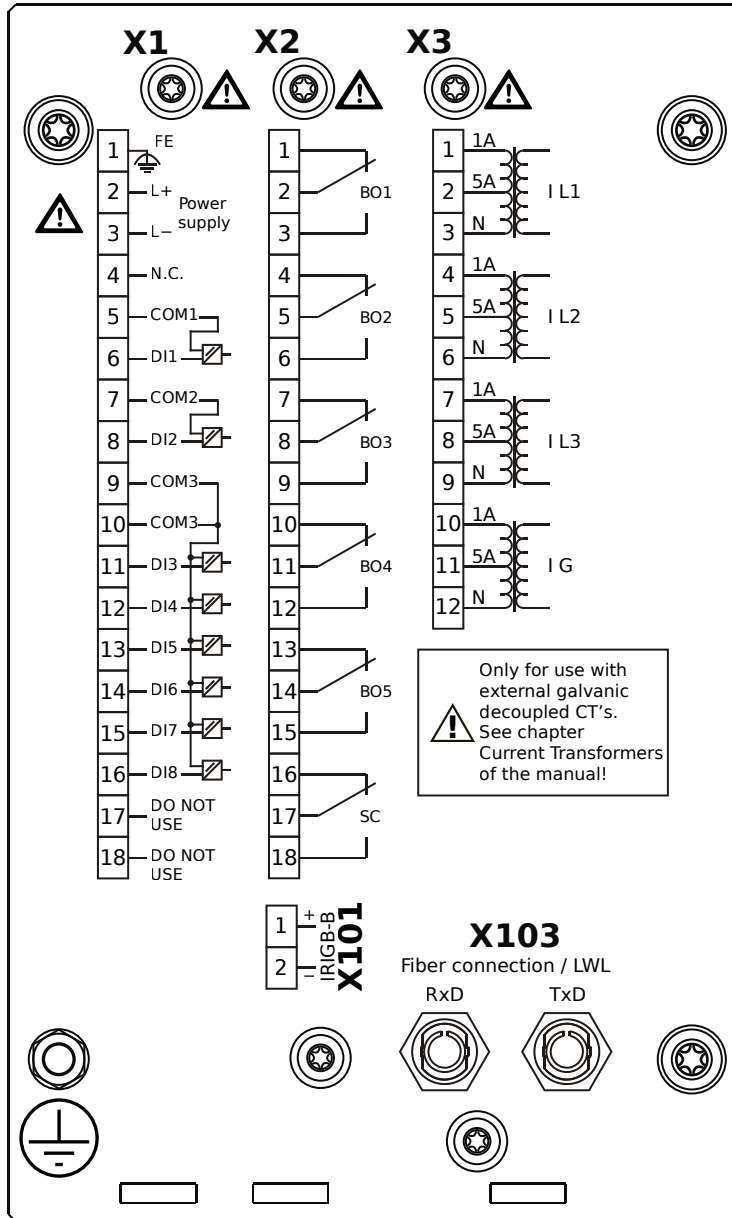


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Profibus-DP, Fiber optics interface, ST Connector


MRM4-2A0AEA

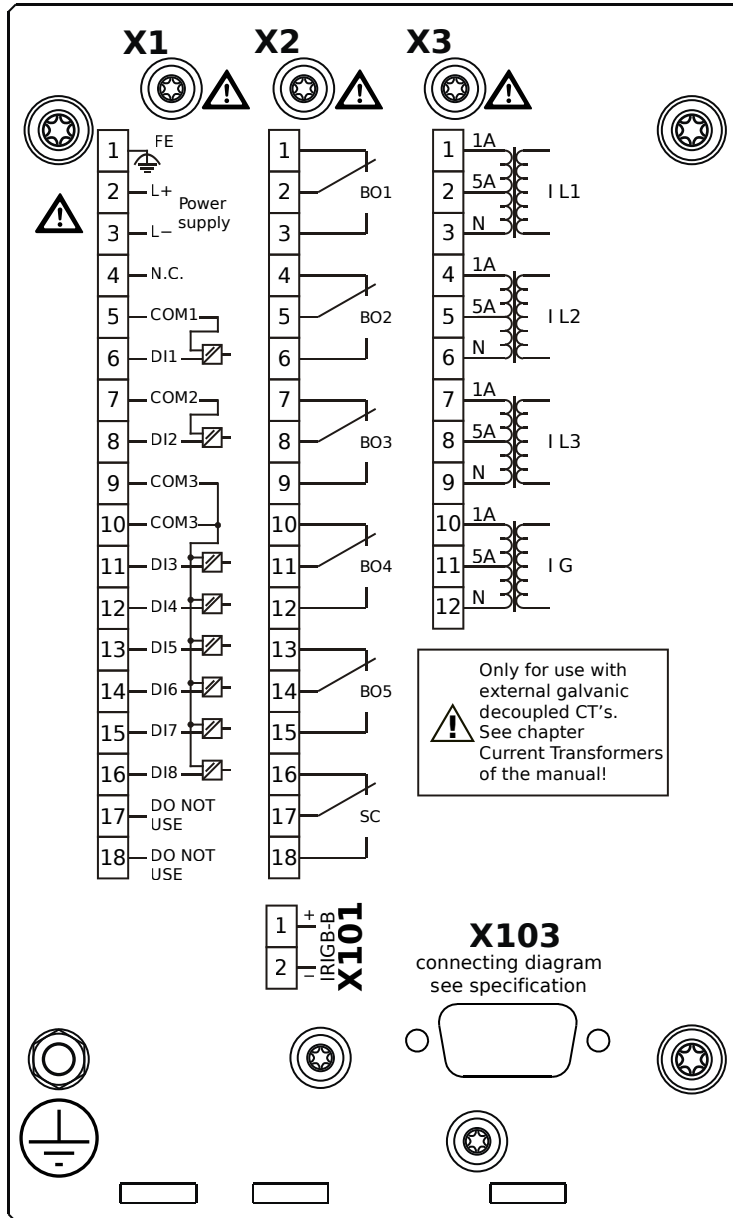

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Profibus-DP, RS485, D-SUB

MRM4-2A0AEB

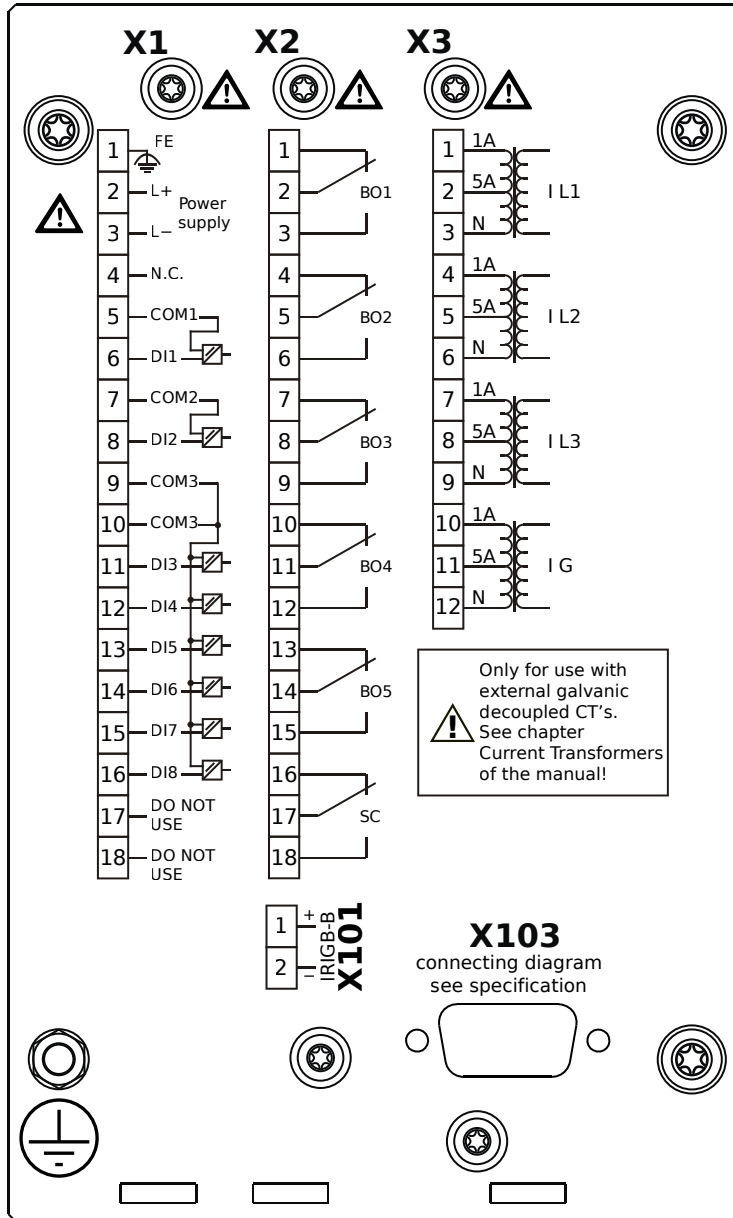


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Profibus-DP, RS485, D-SUB


MRM4-2A0AFA

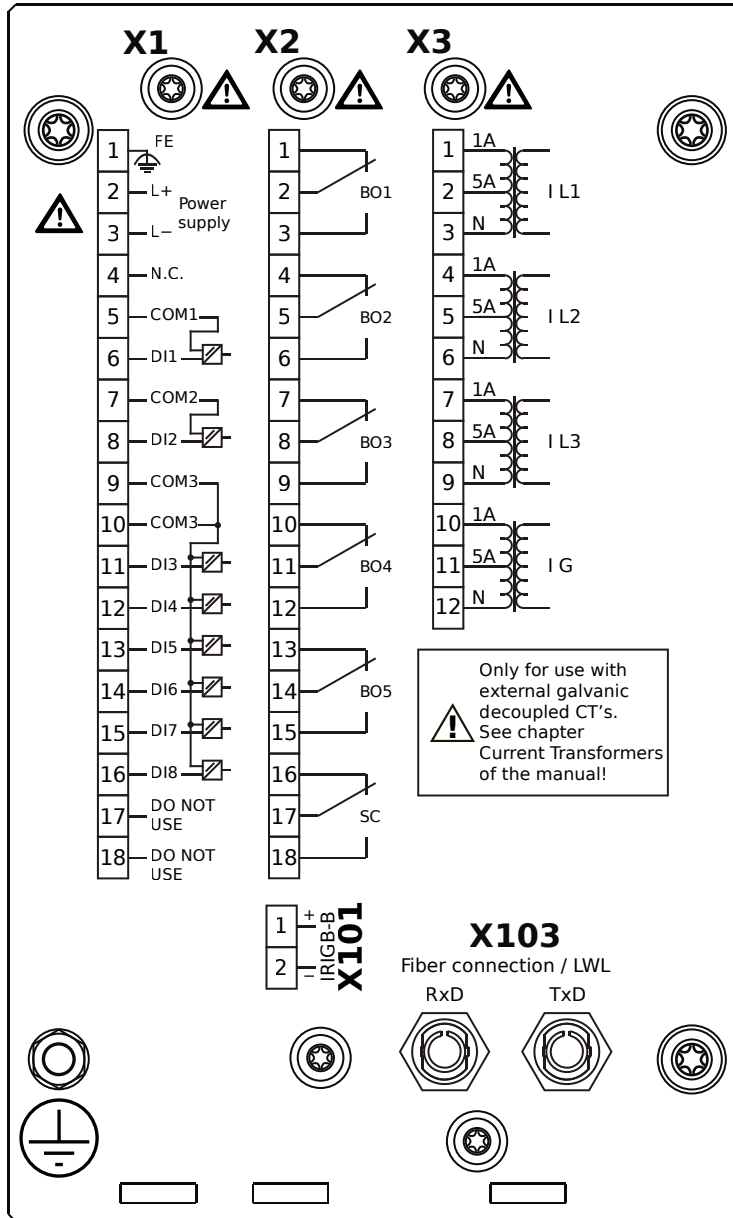

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2A0AFB

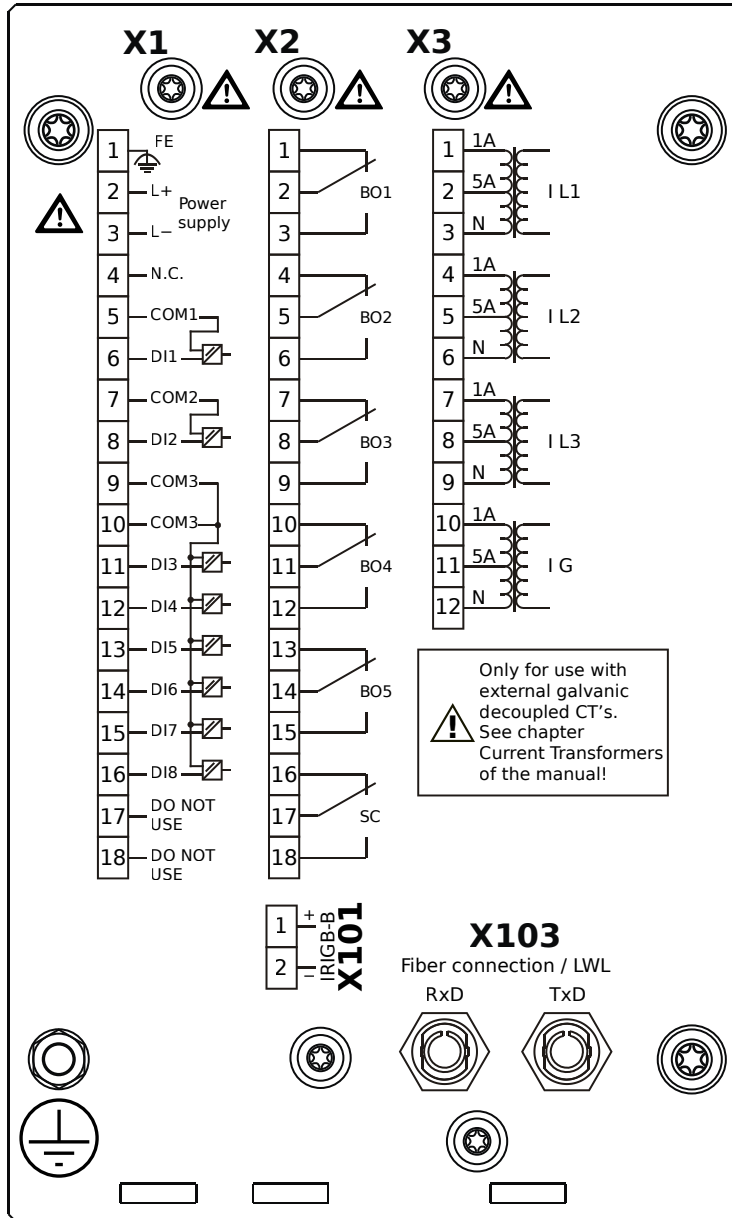

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector


MRM4-2A0AGA

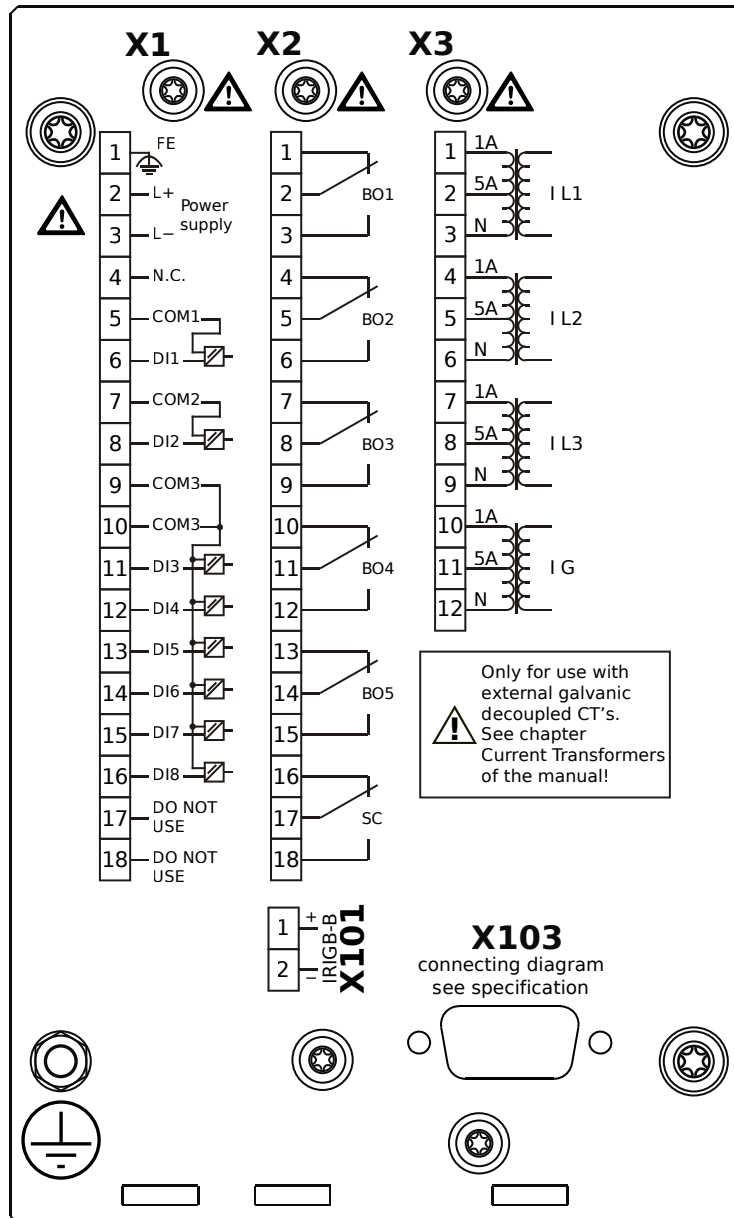

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2A0AGB

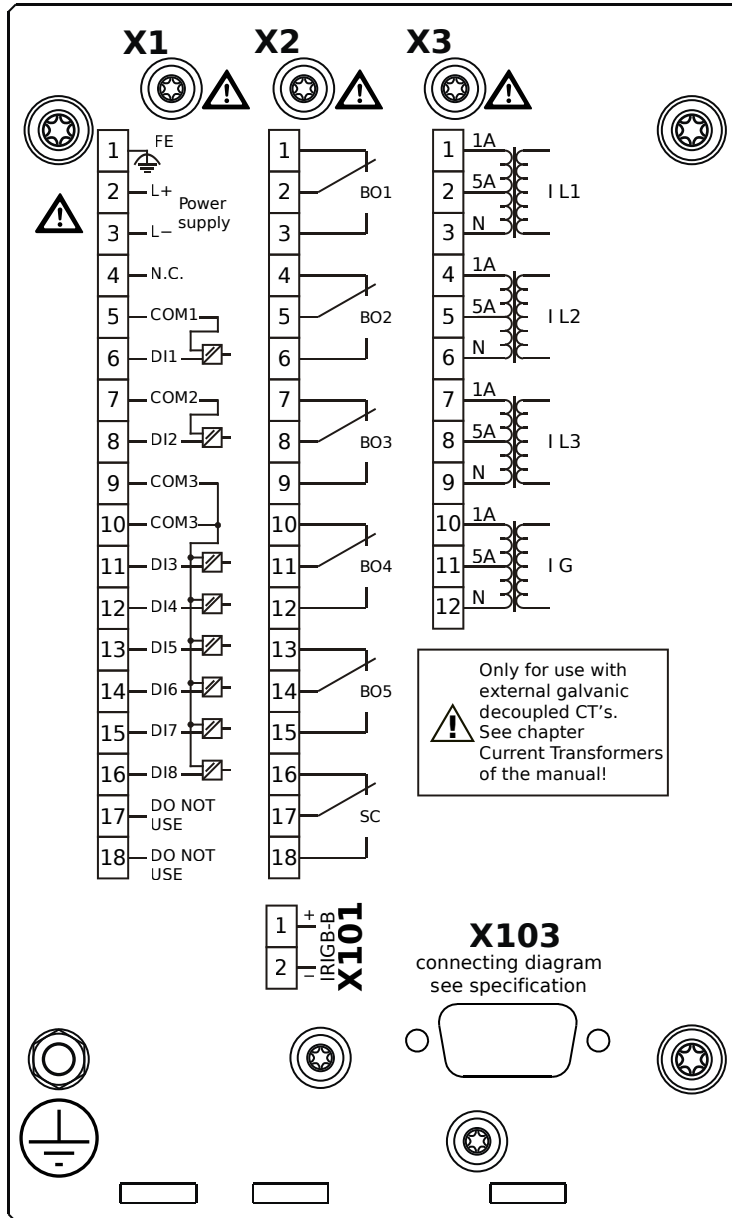

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2A0AHA

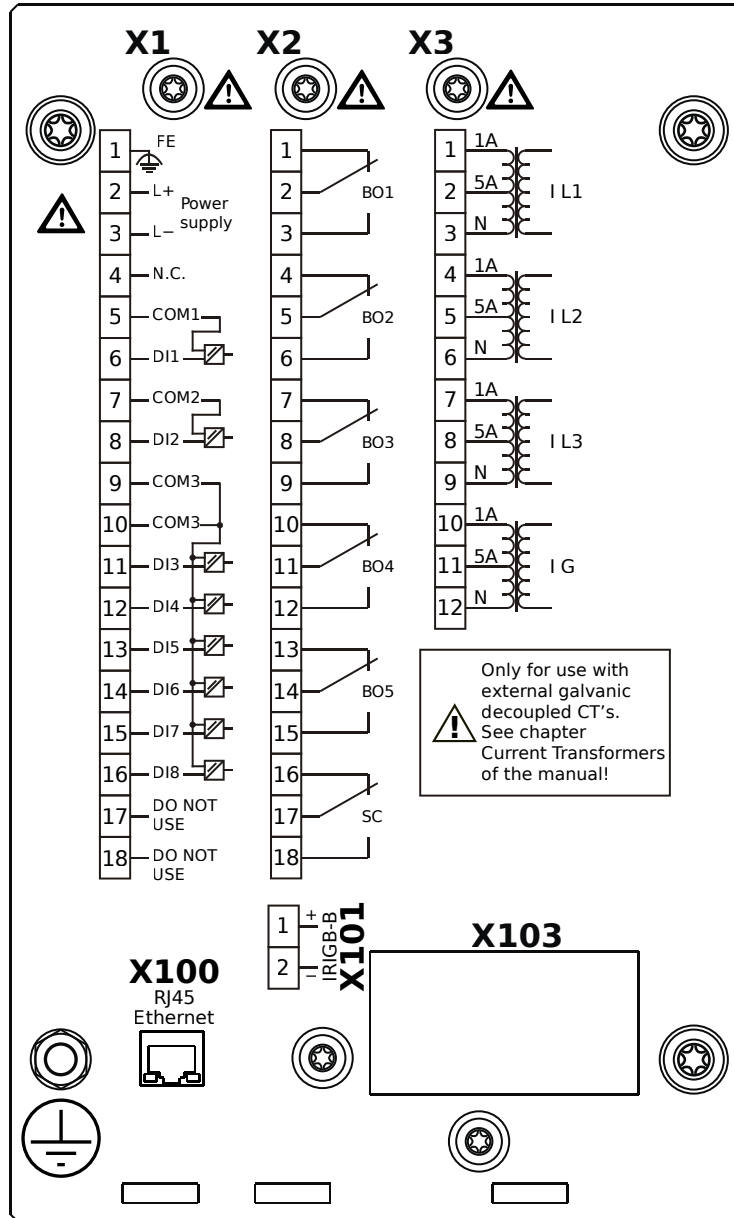

Housing B1, small display, door mounting

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs

X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact


X3 – TI: Standard current measuring card

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

X101 – IRIG-B00X

FX)

MRM4-2A0AHB

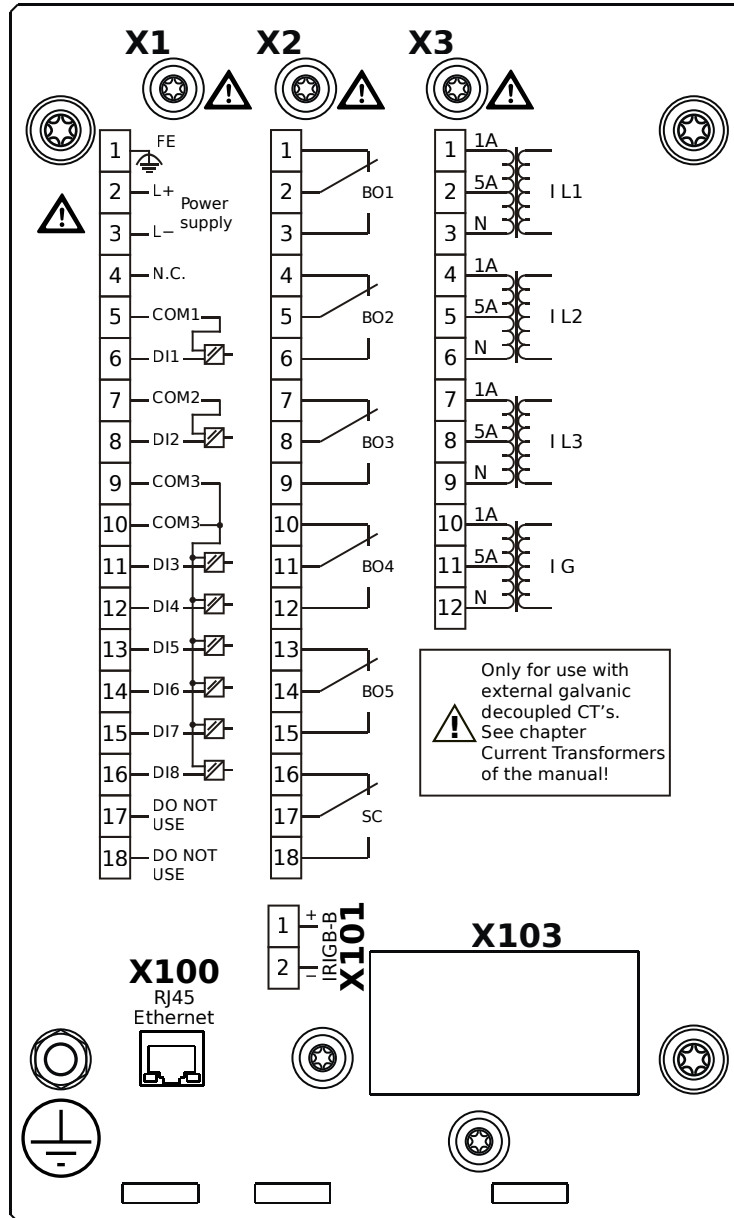

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs

X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact


X3 – TI: Standard current measuring card

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

FX)

X101 – IRIG-B00X


MRM4-2A0AIA

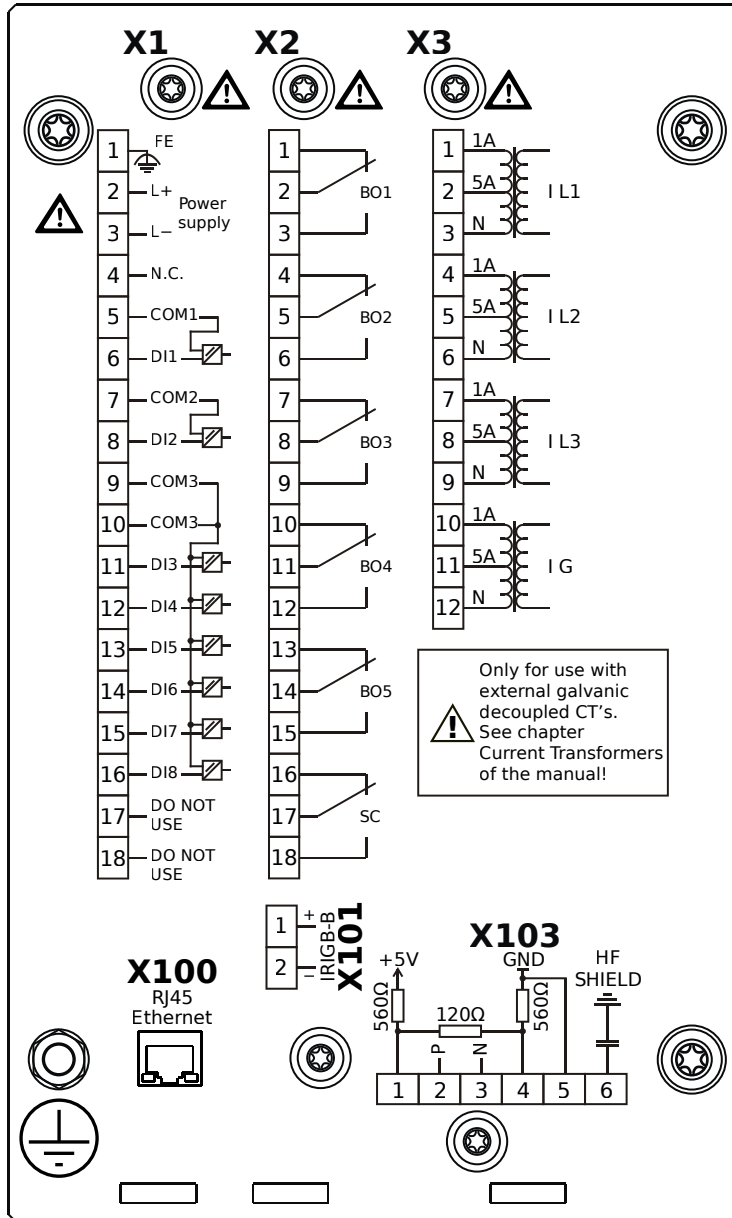

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2A0AIB

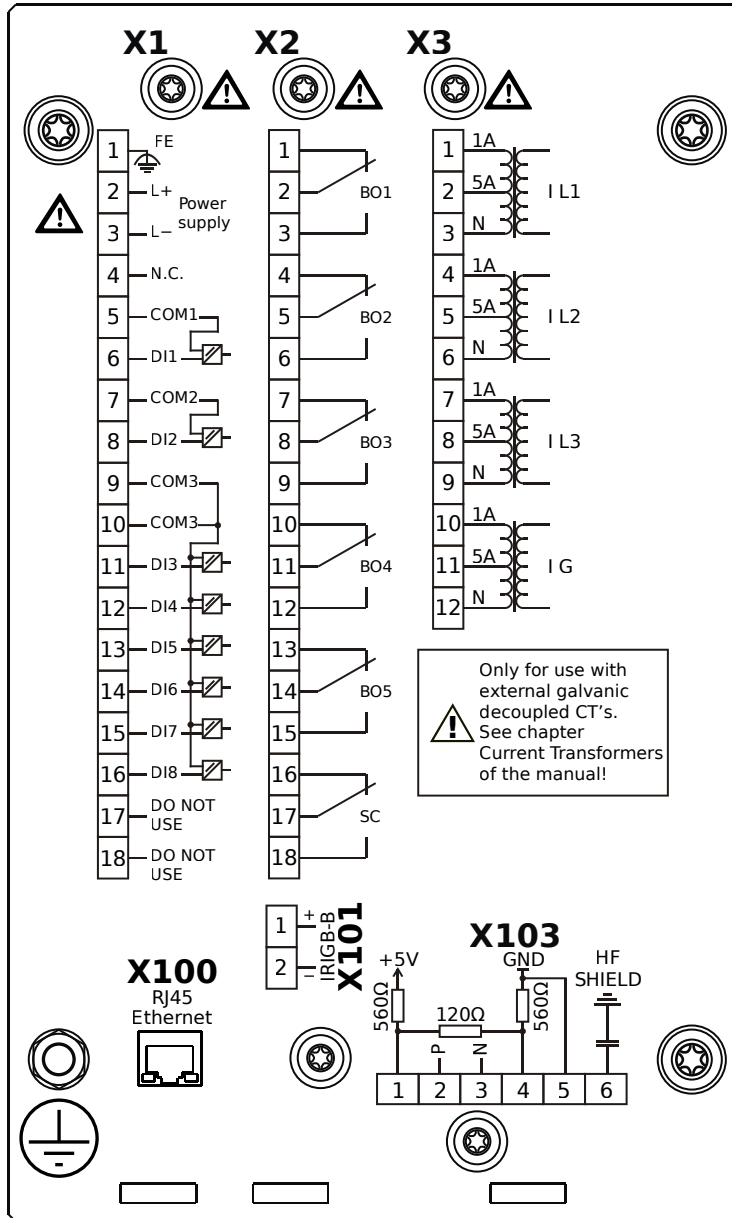


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals


MRM4-2A0AKA

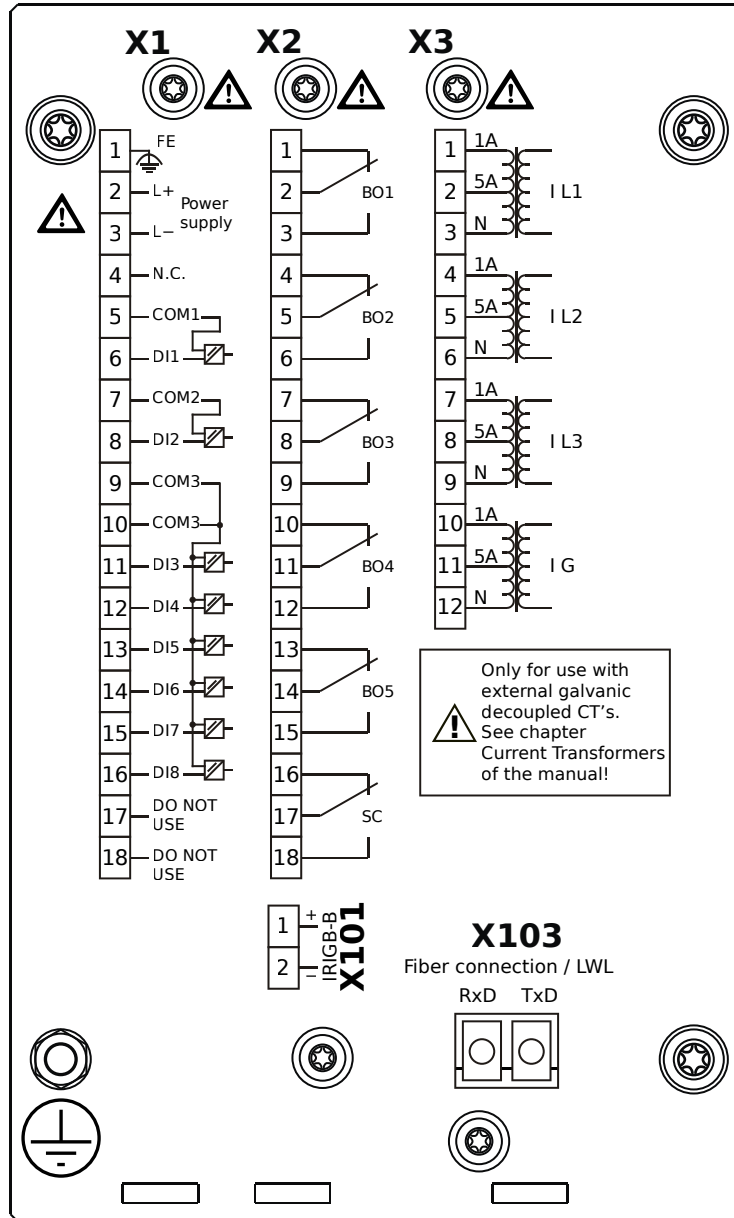

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2A0AKB

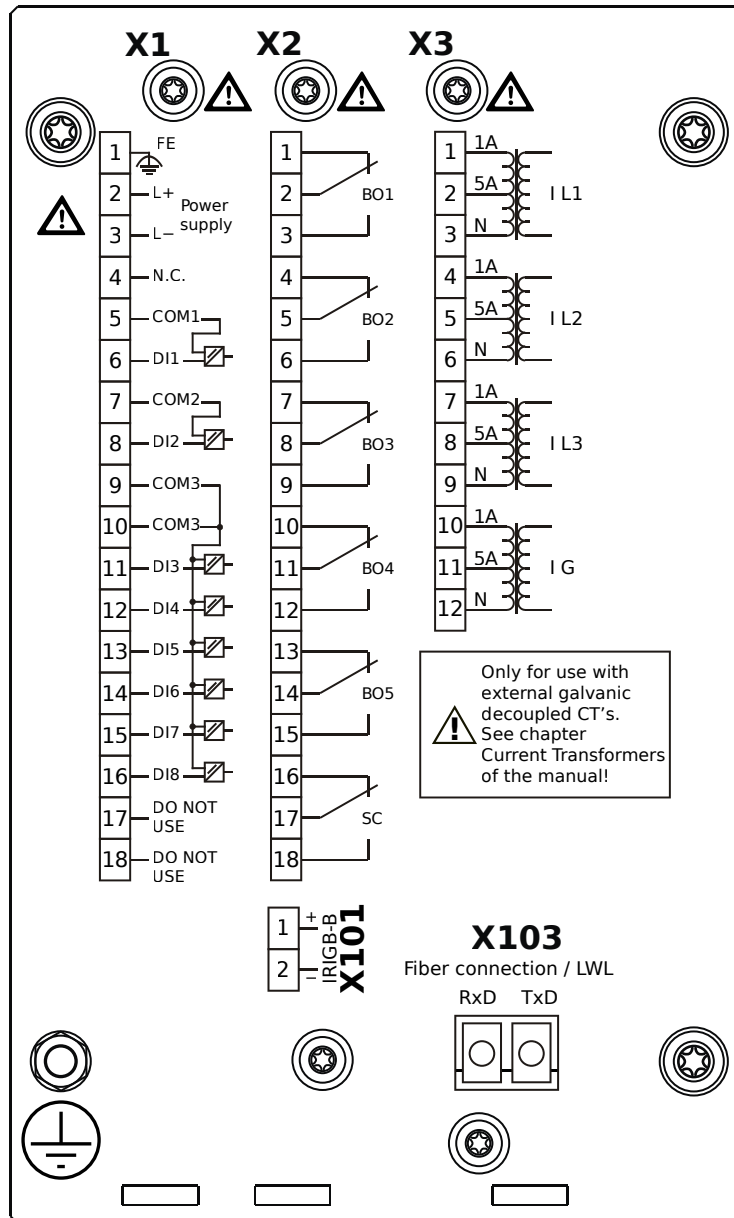


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector


MRM4-2A0ALA

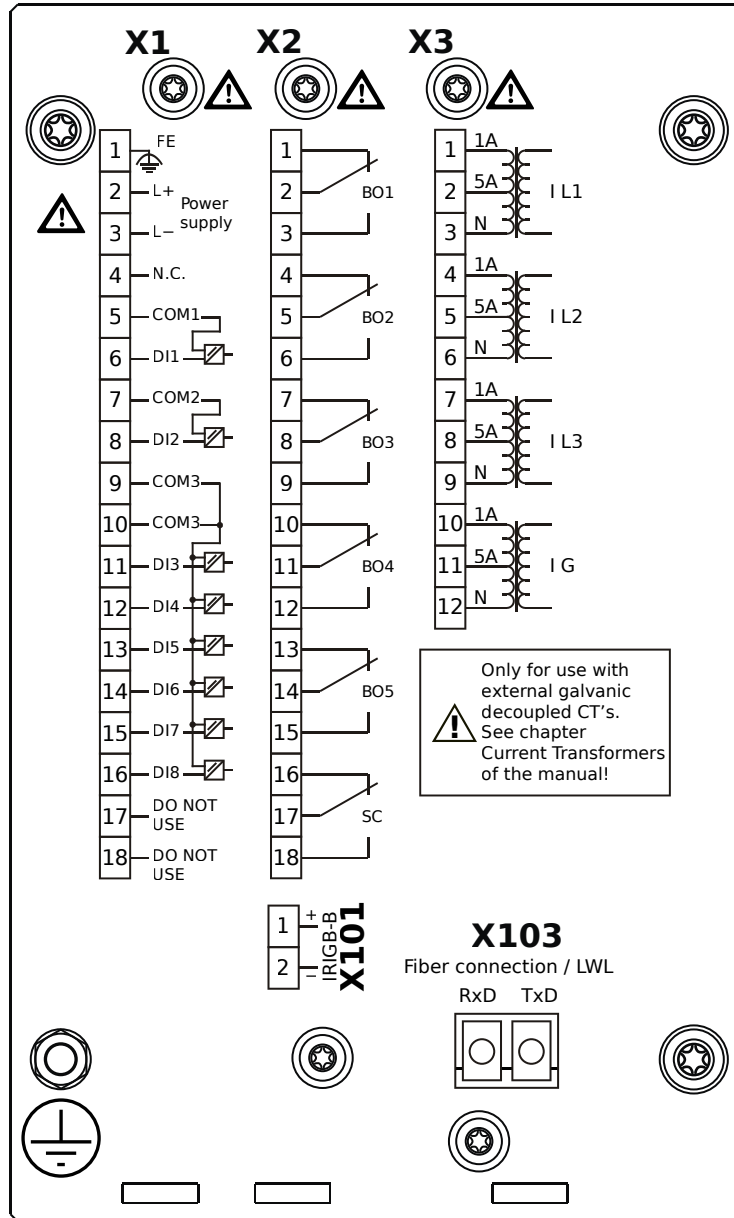

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2A0ALB

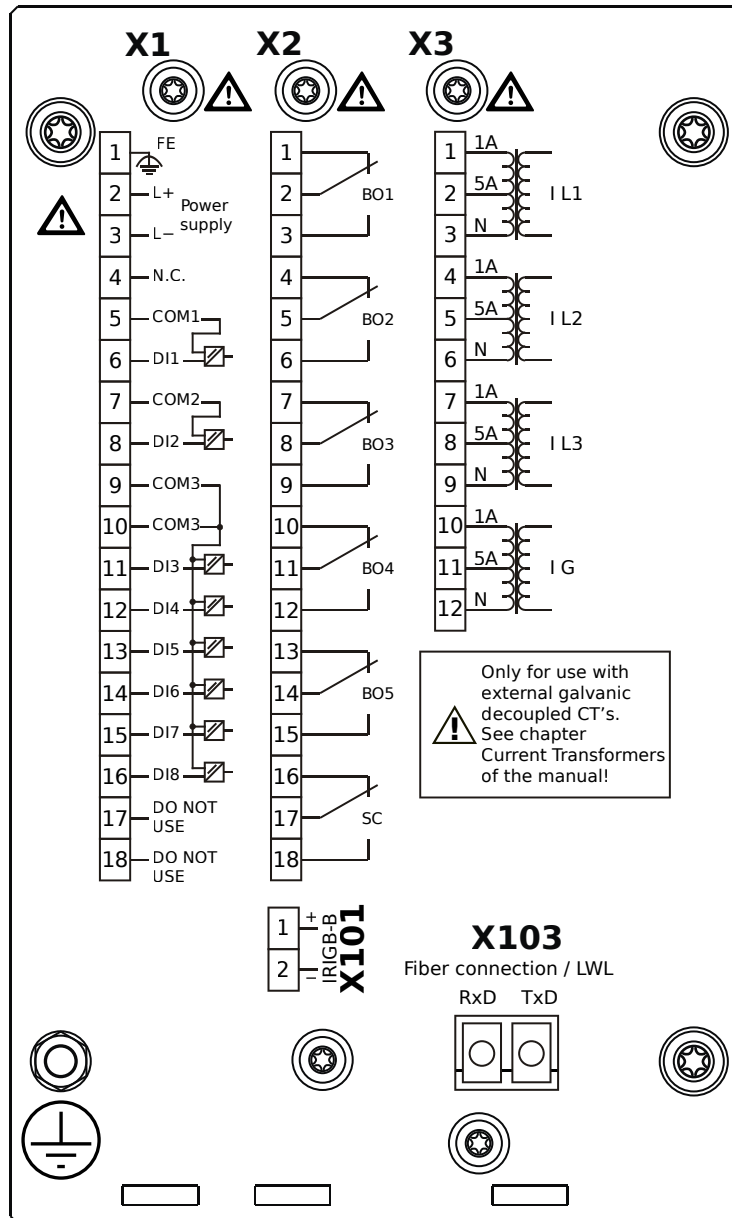

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector


MRM4-2A0AOA

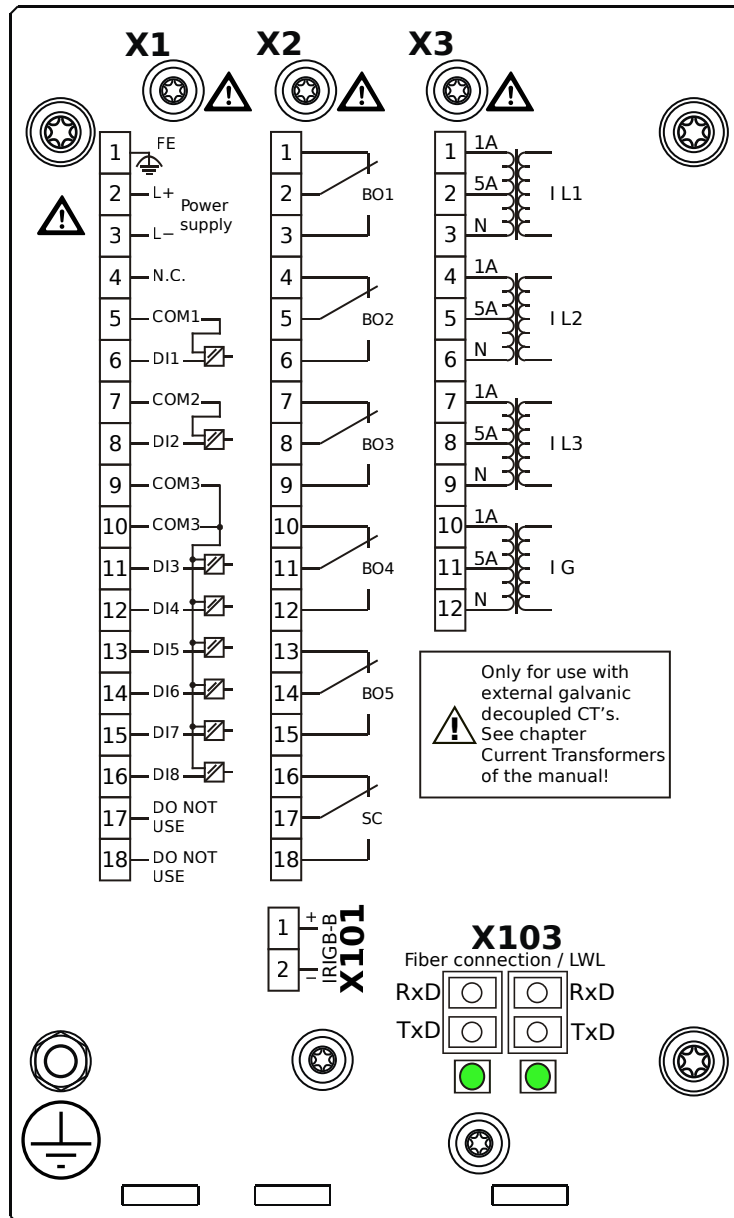

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A0AOB

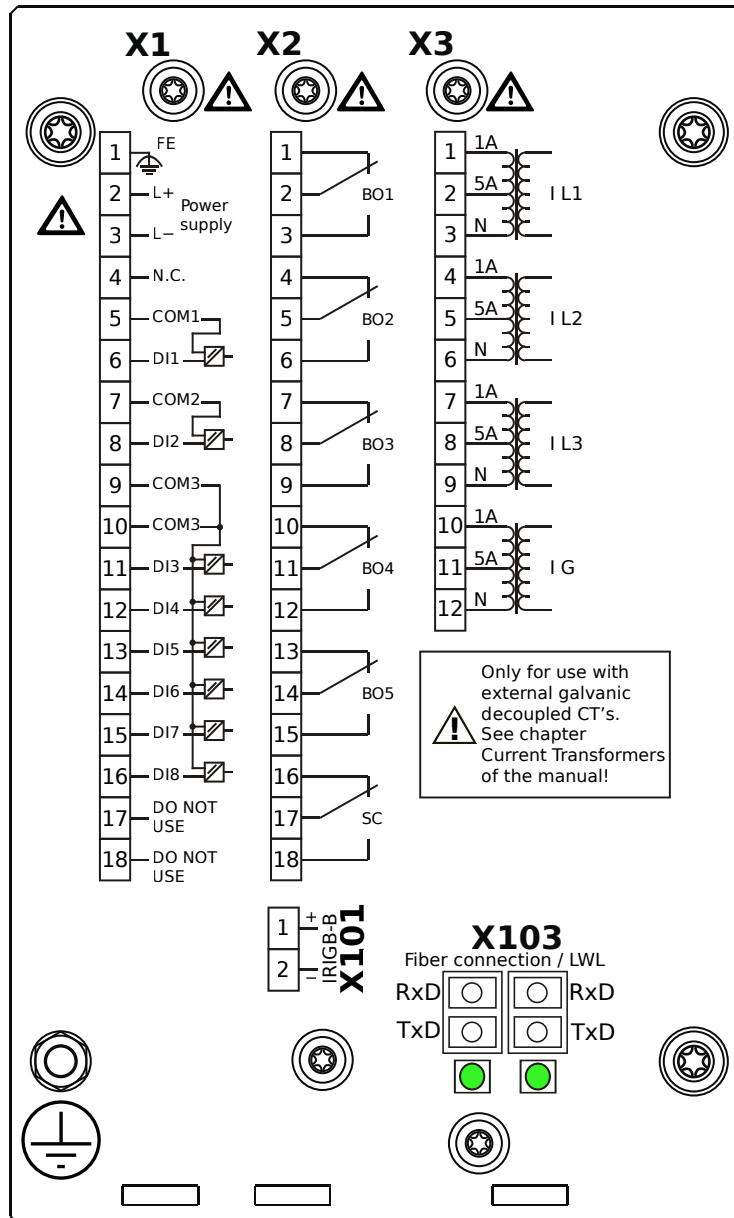


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector


MRM4-2A0APA

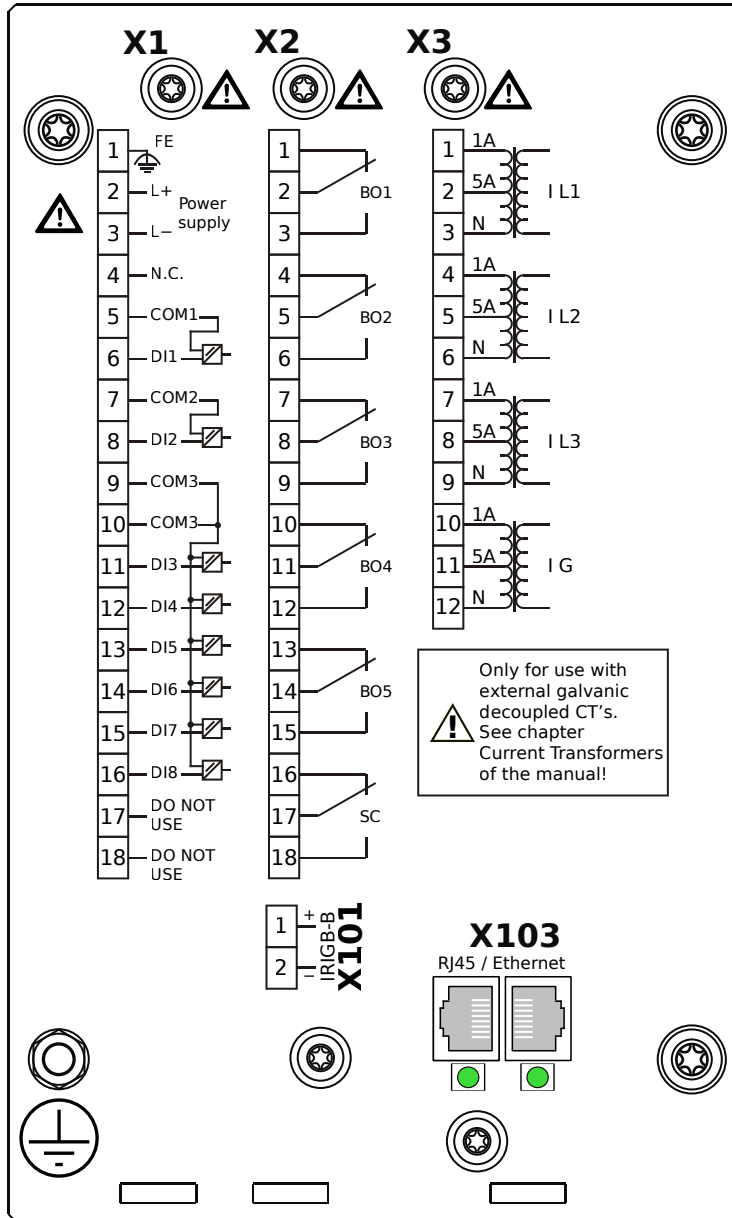

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2A0APB

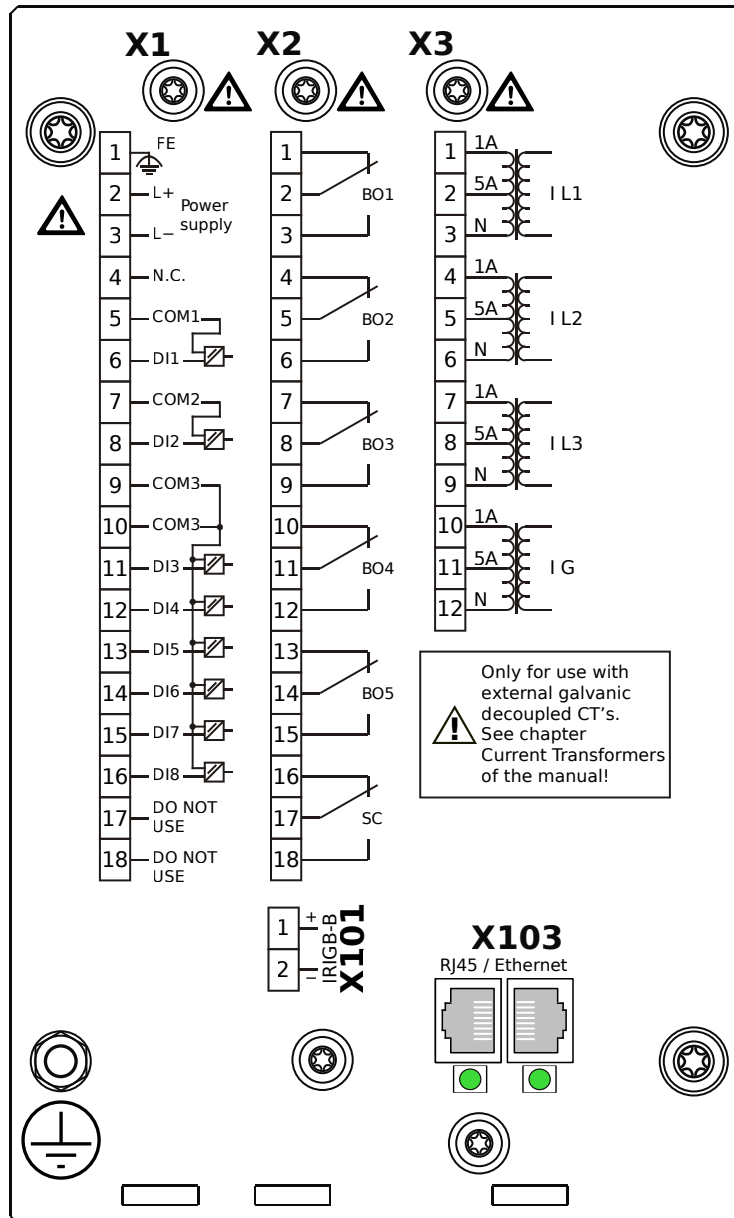

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)


MRM4-2A0AQA

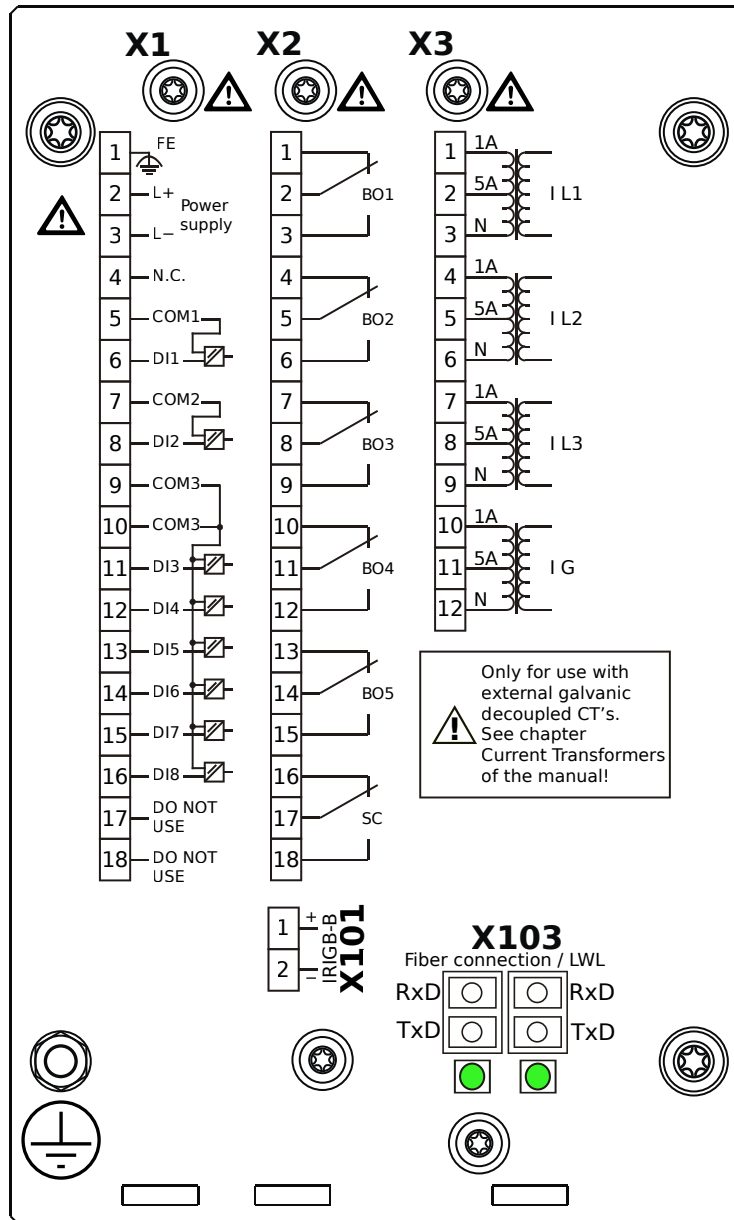

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A0AQB

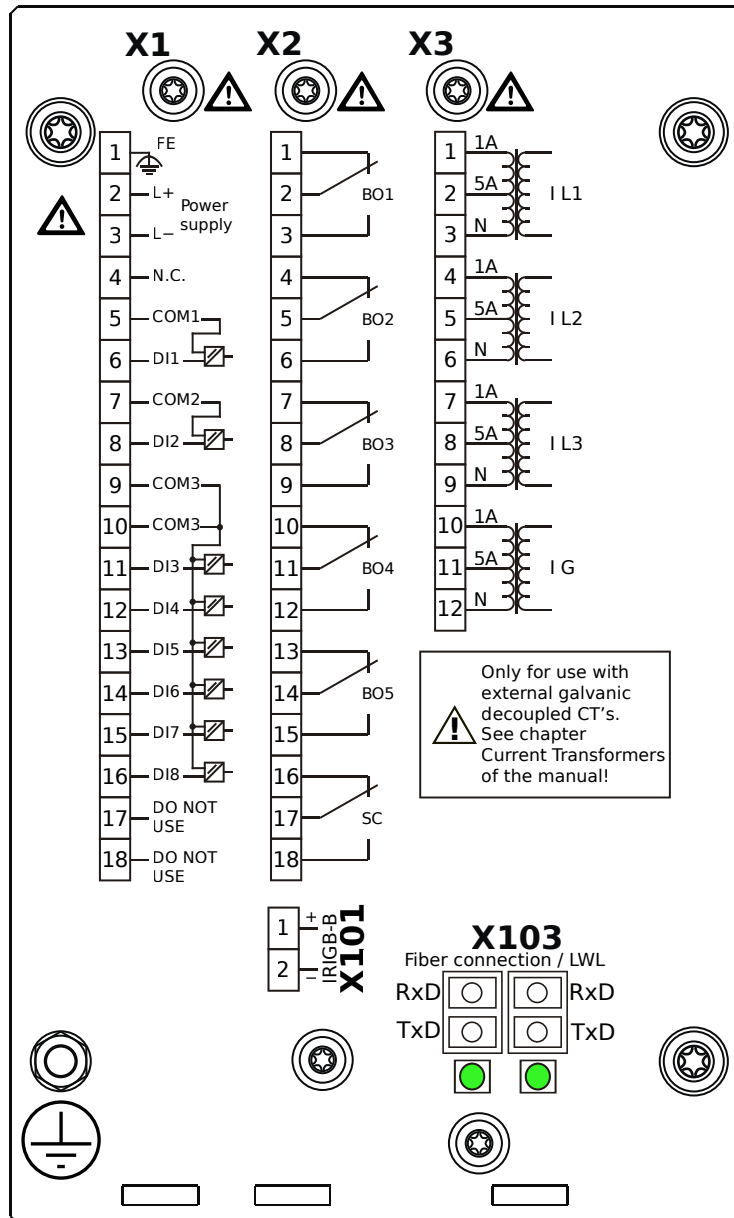

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A0ARA

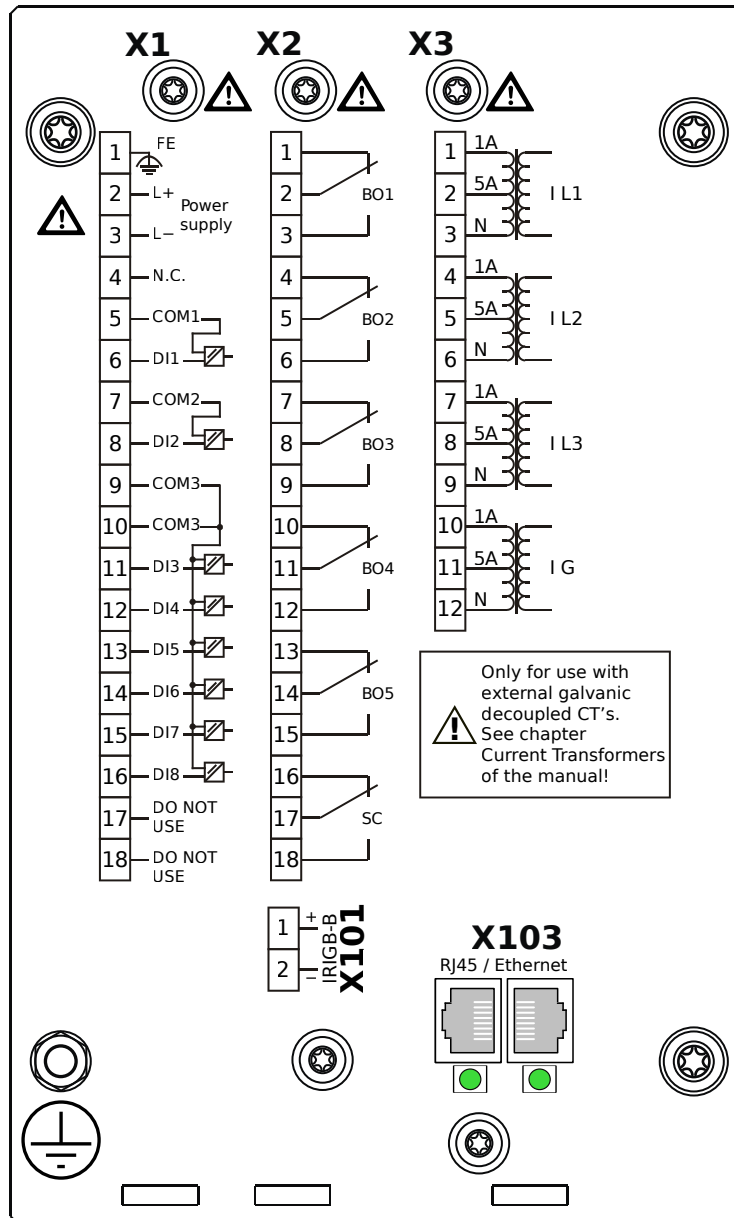

Housing B1, small display, door mounting

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2A0ARB

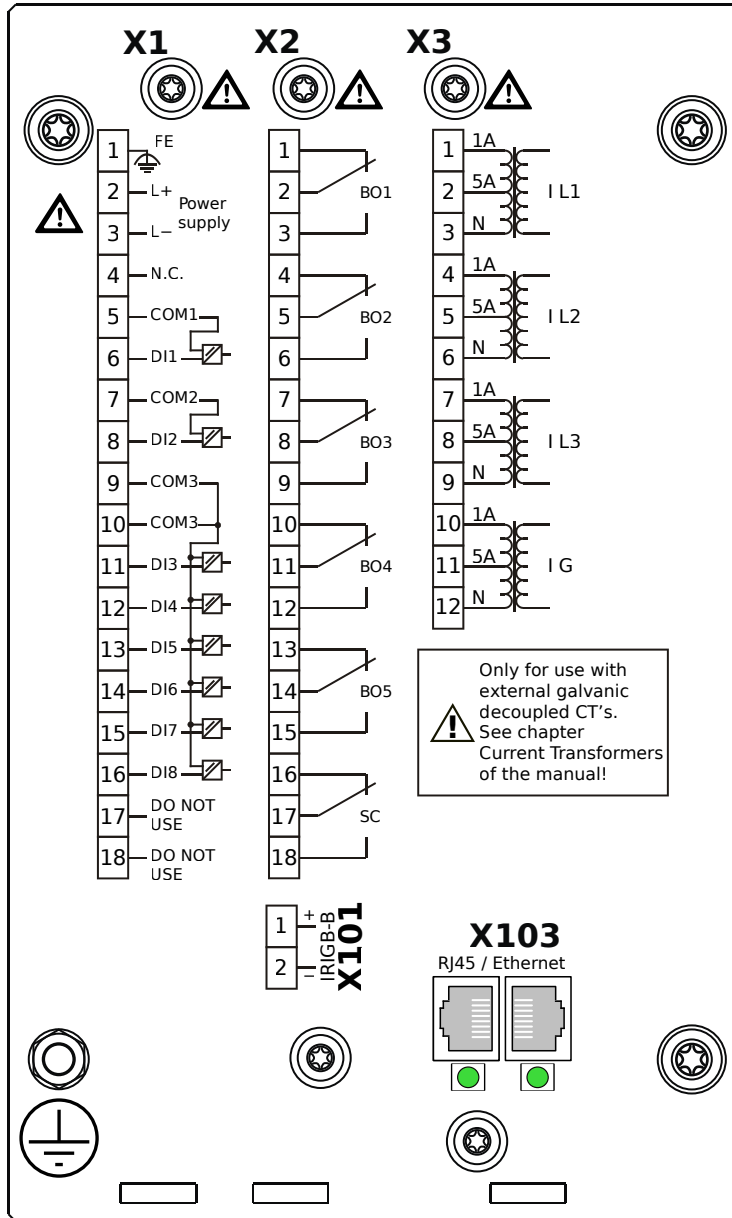

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)


MRM4-2A0ATA

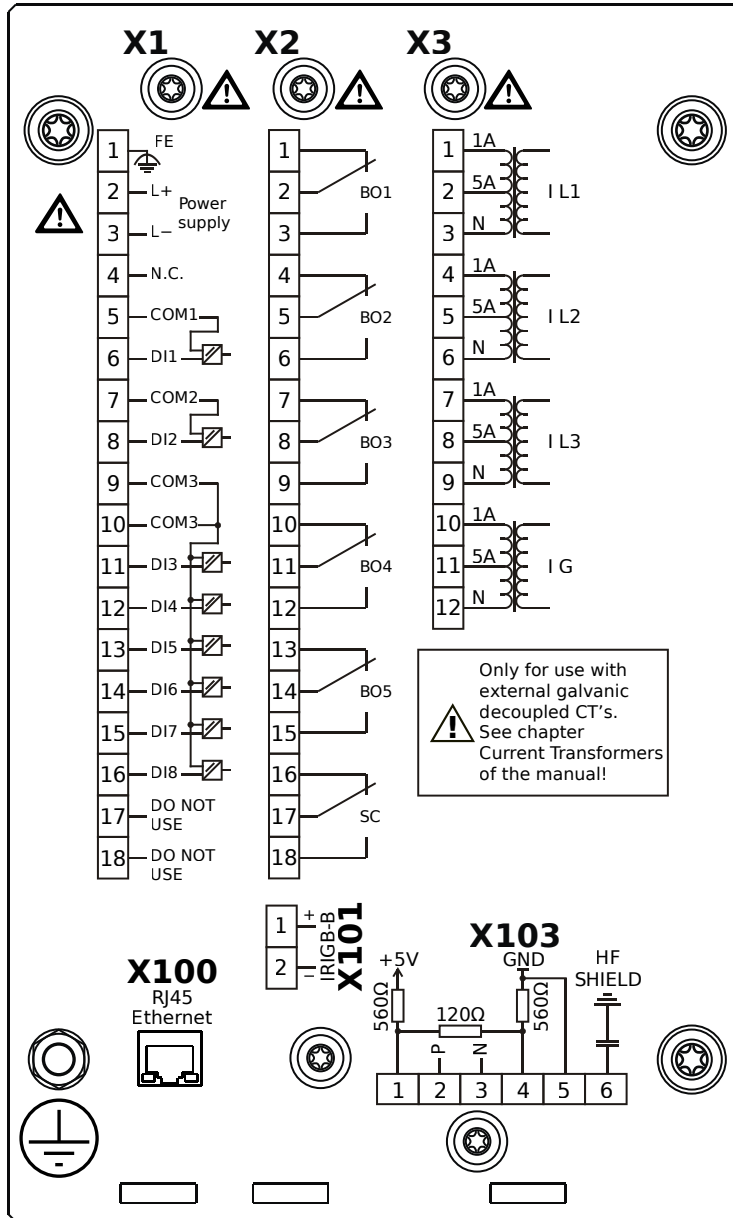

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X100** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2A0ATB

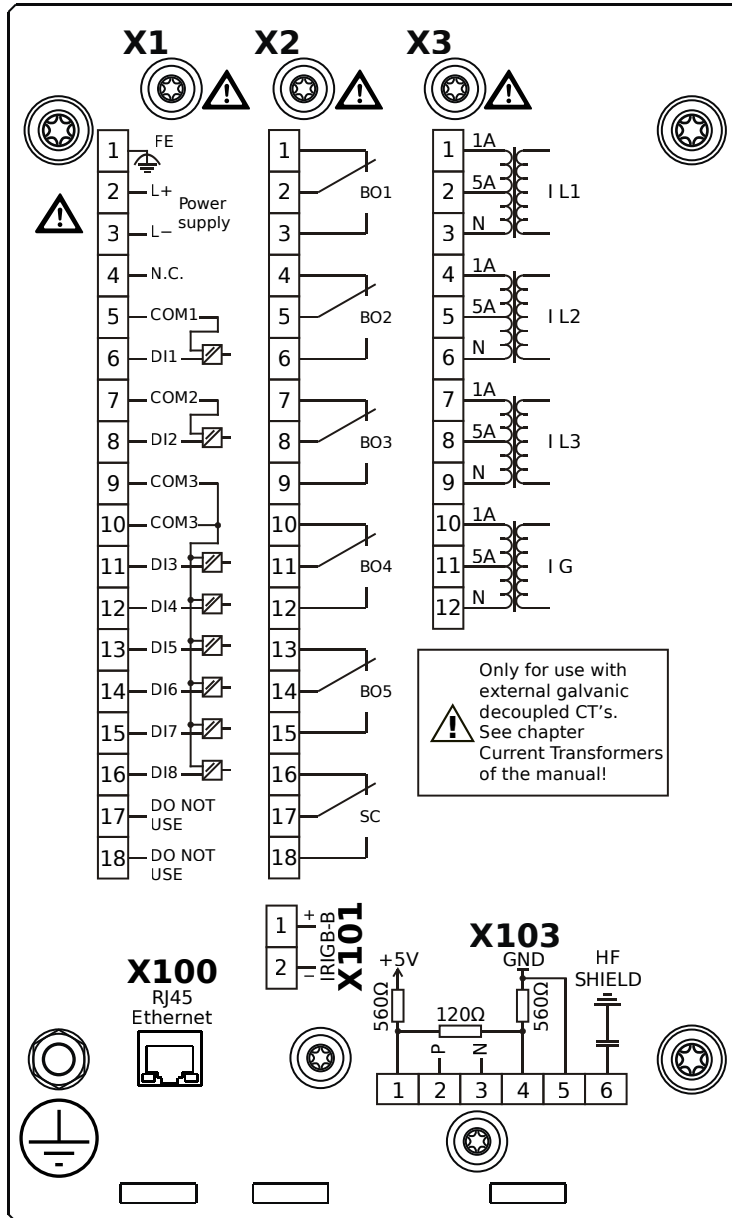

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs

X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card


X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

FX)

X101 – IRIG-B00X

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals


MRM4-2A0BAA

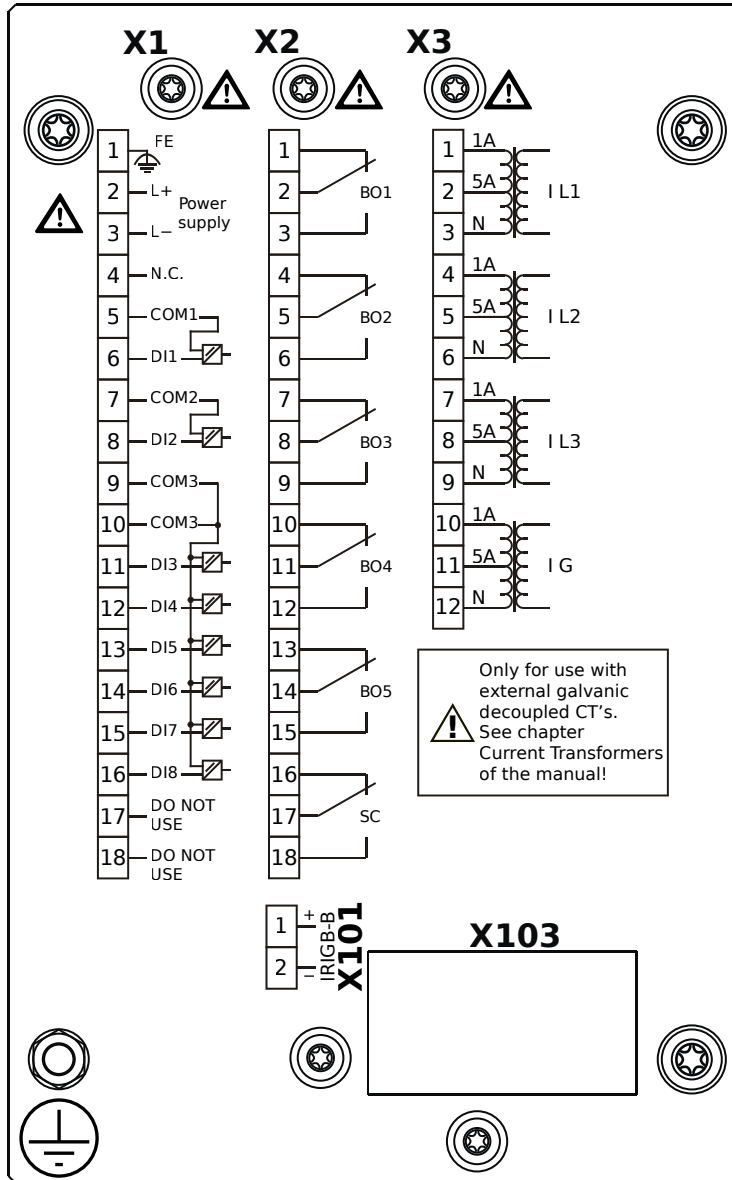

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X

MRM4-2A0BAB

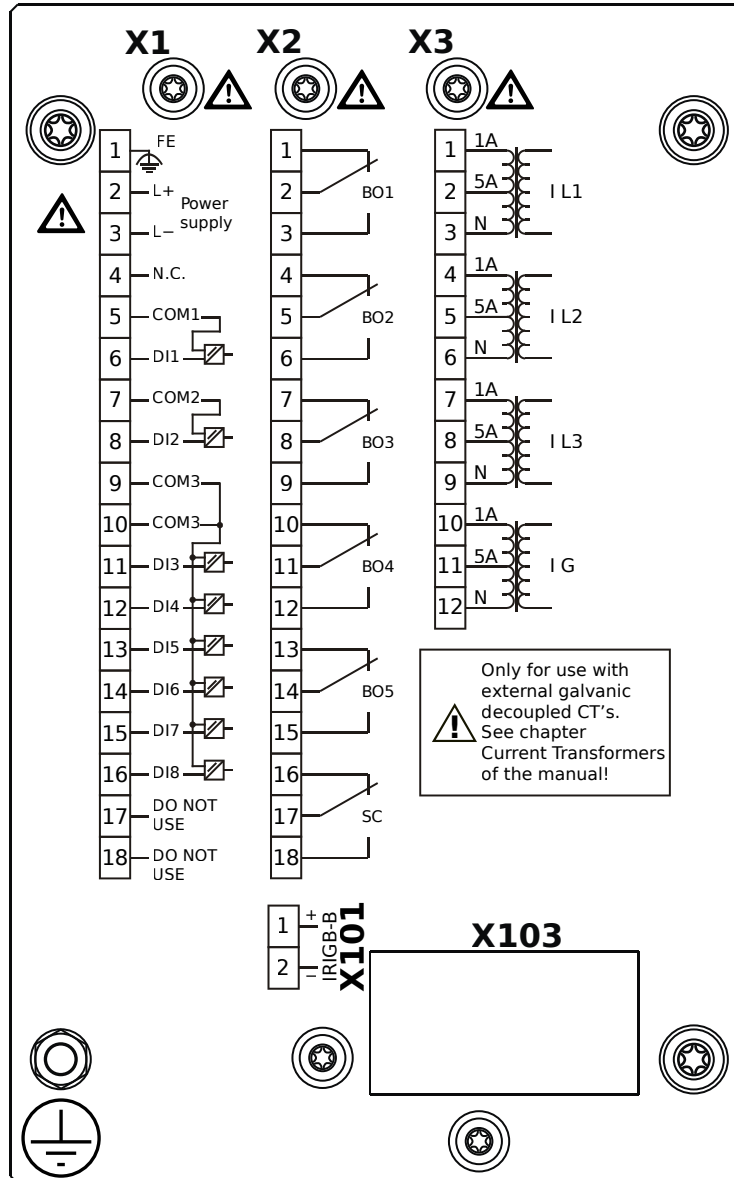


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X


MRM4-2A0BBA

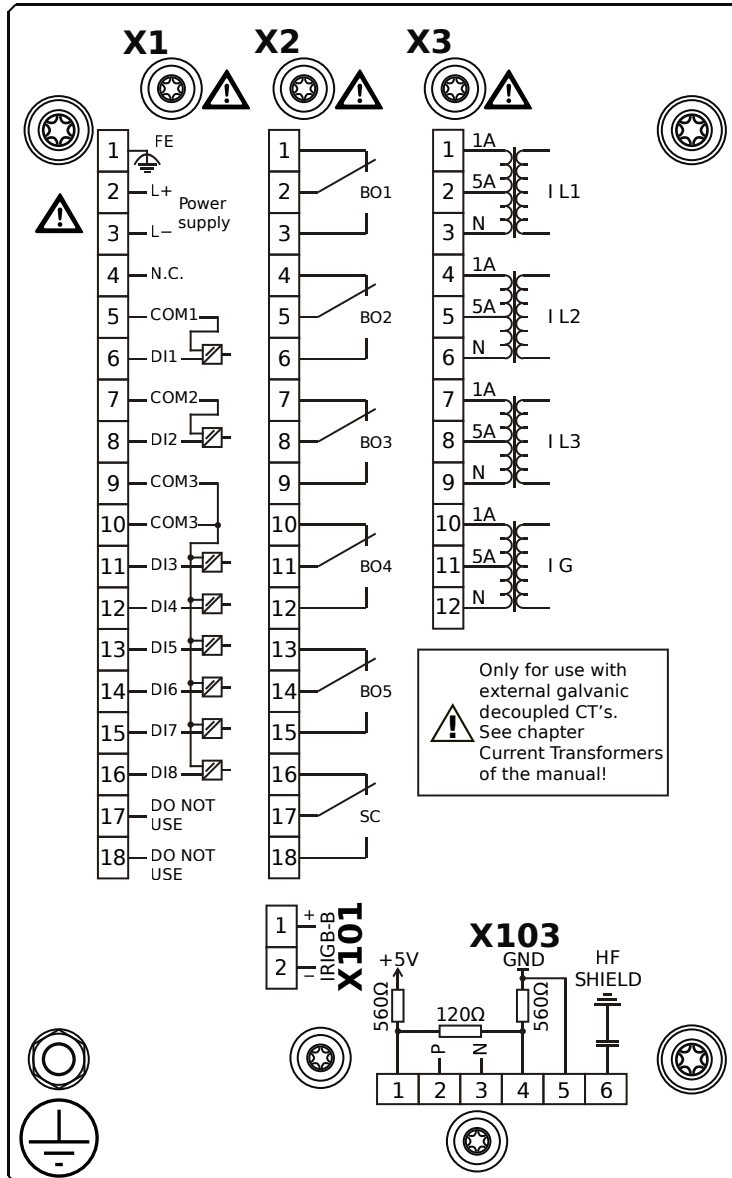

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2A0BBB

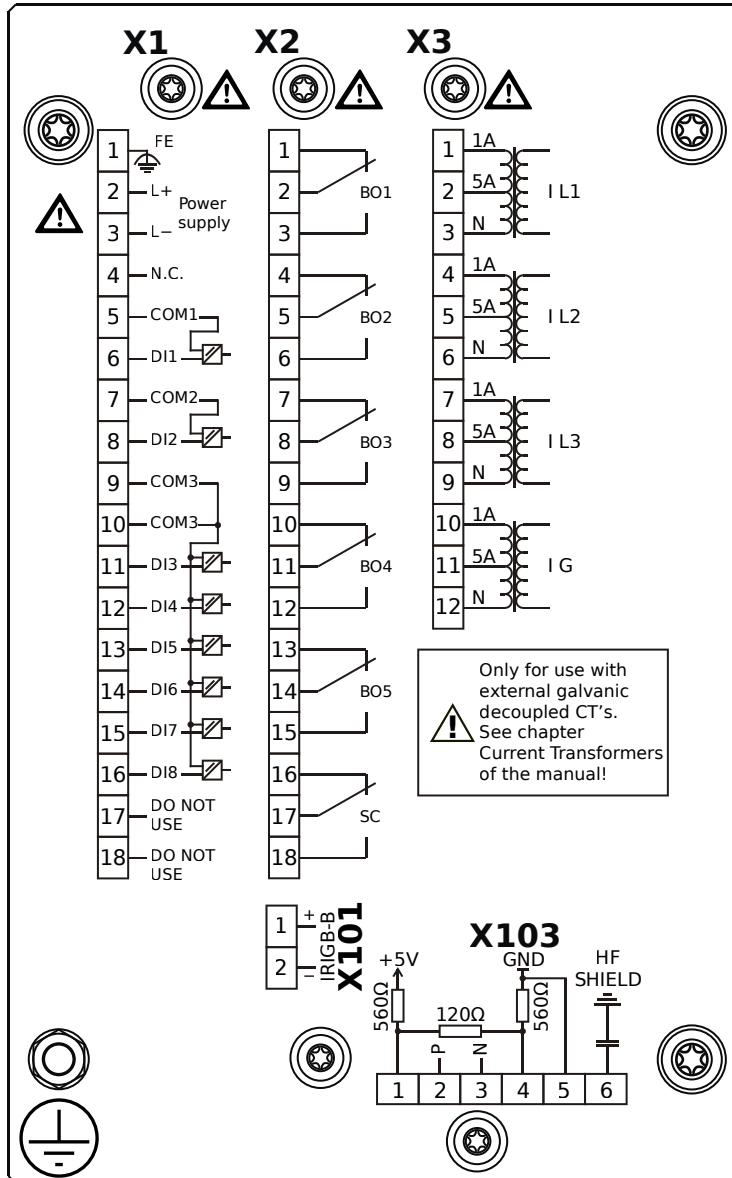


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals


MRM4-2A0BCA

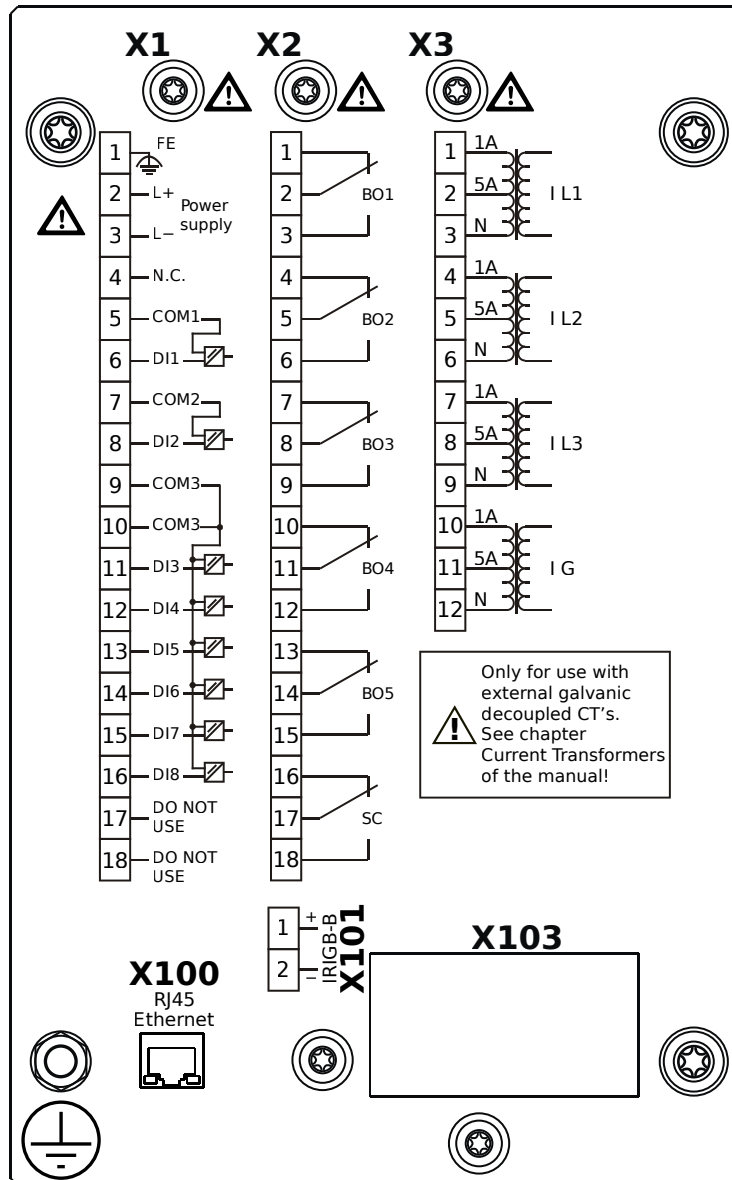

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X

MRM4-2A0BCB

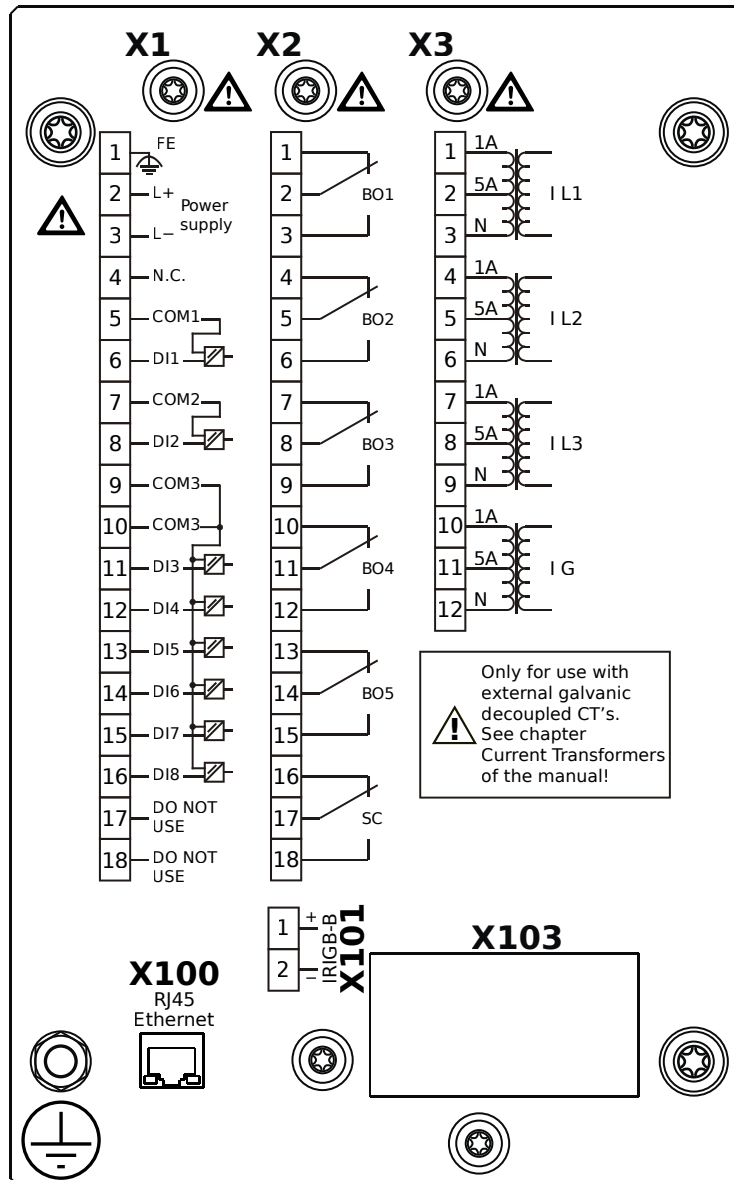


Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X


MRM4-2A0BDA

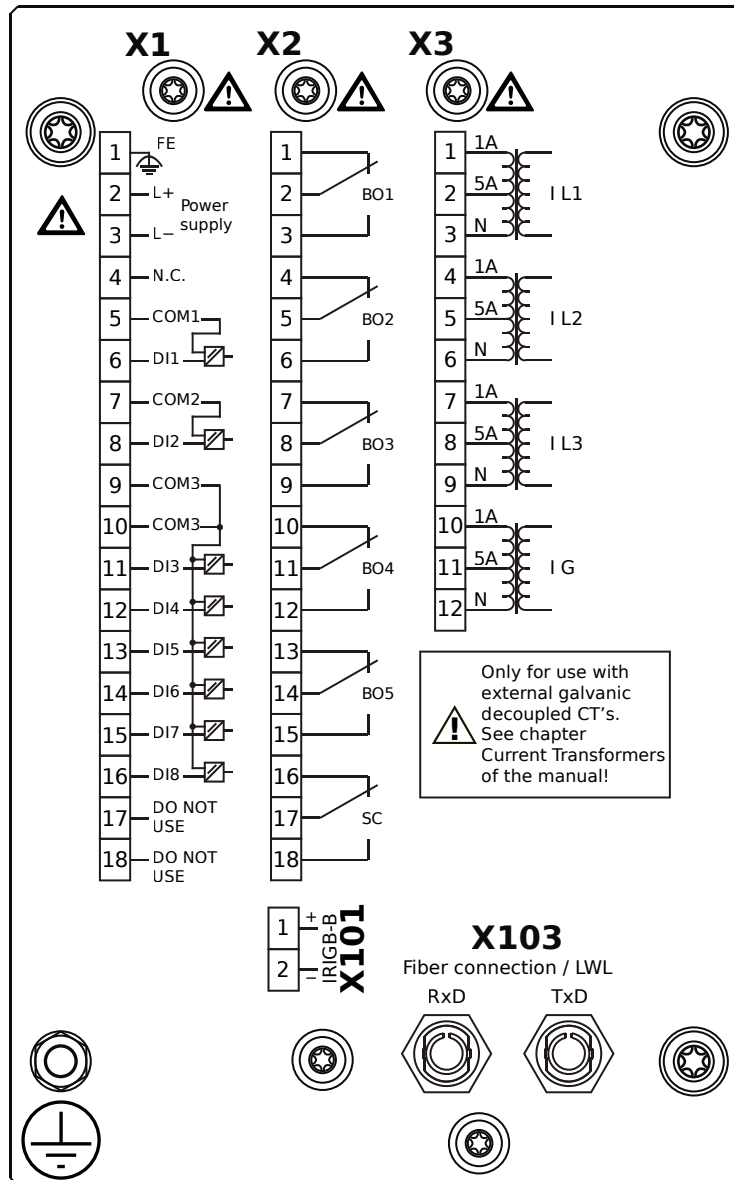

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2A0BDB

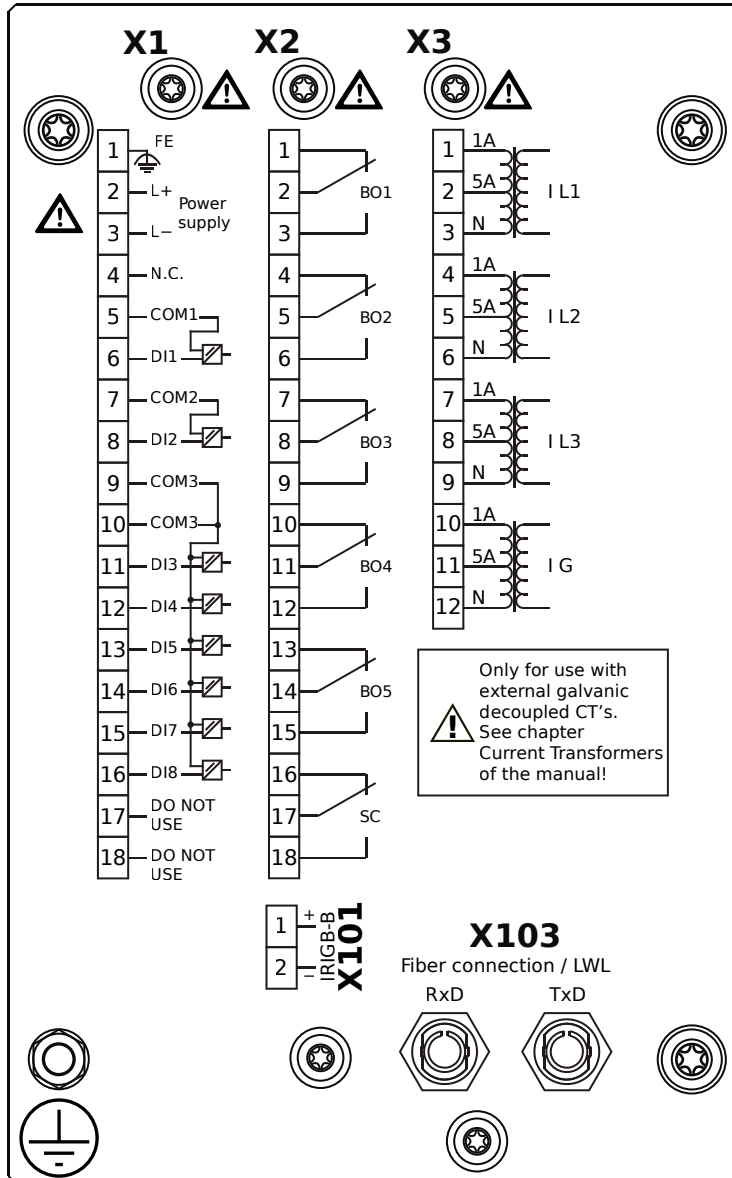


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Profibus-DP, Fiber optics interface, ST Connector


MRM4-2A0BEA

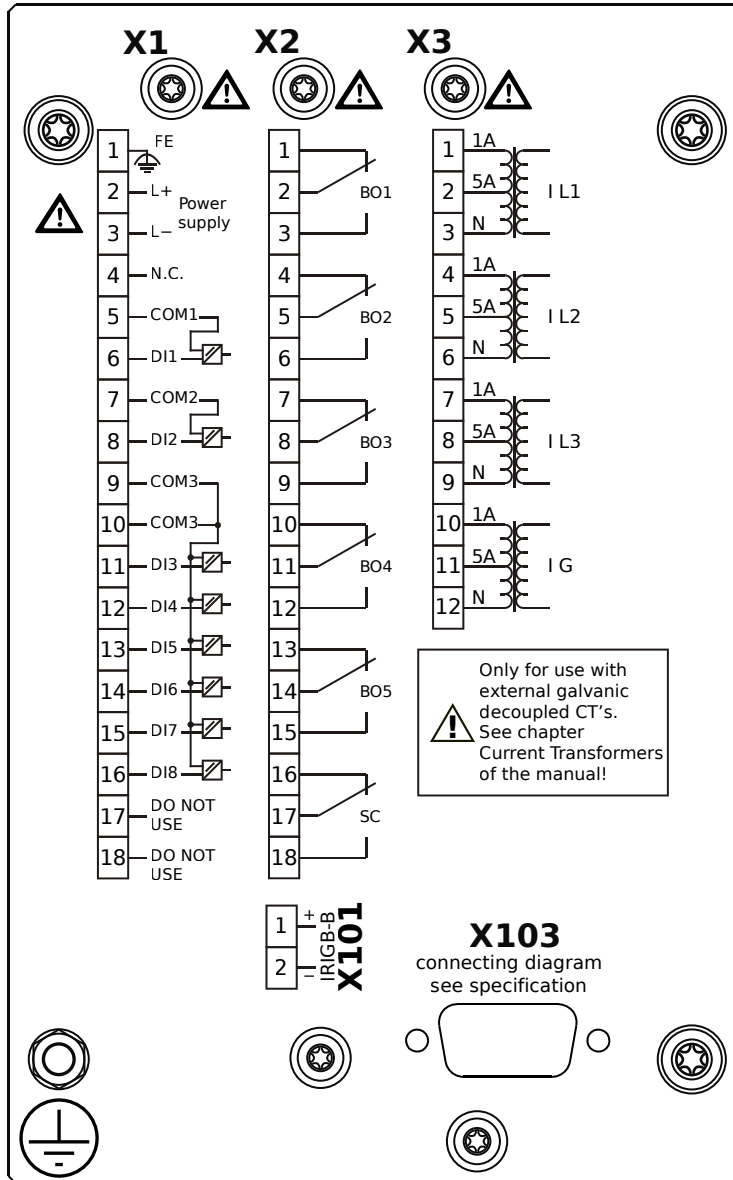

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Profibus-DP, RS485, D-SUB

MRM4-2A0BEB

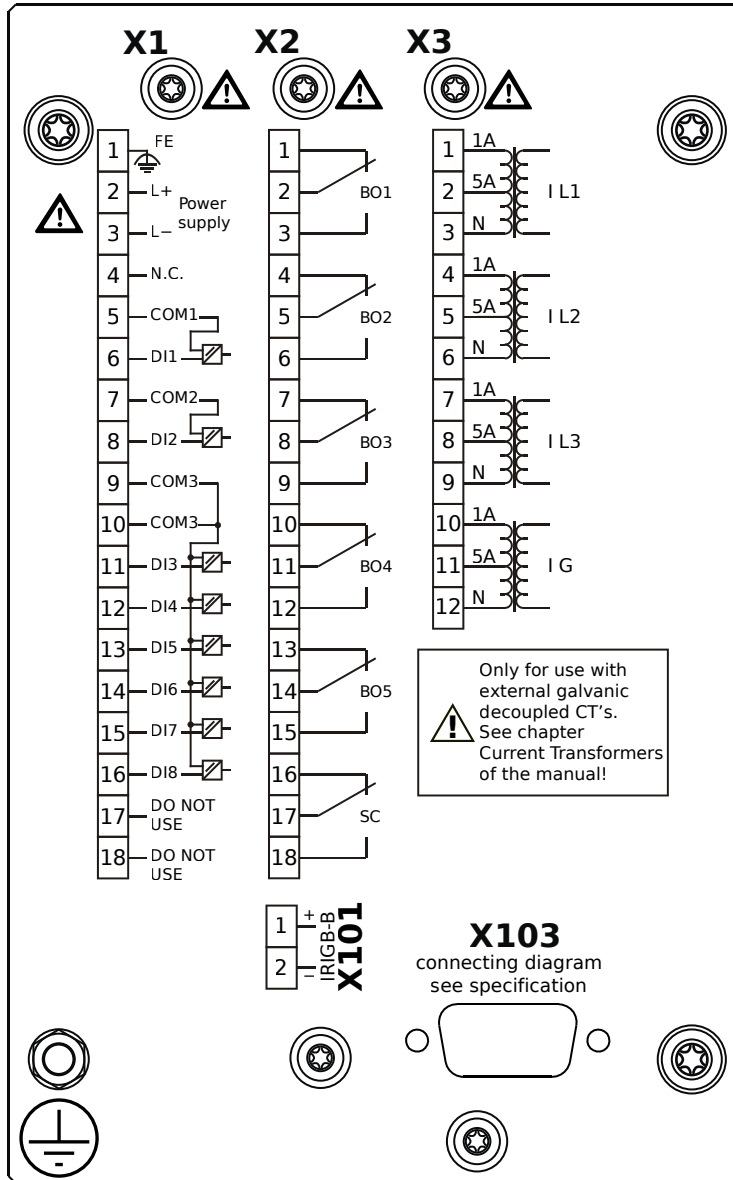


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Profibus-DP, RS485, D-SUB


MRM4-2A0BFA

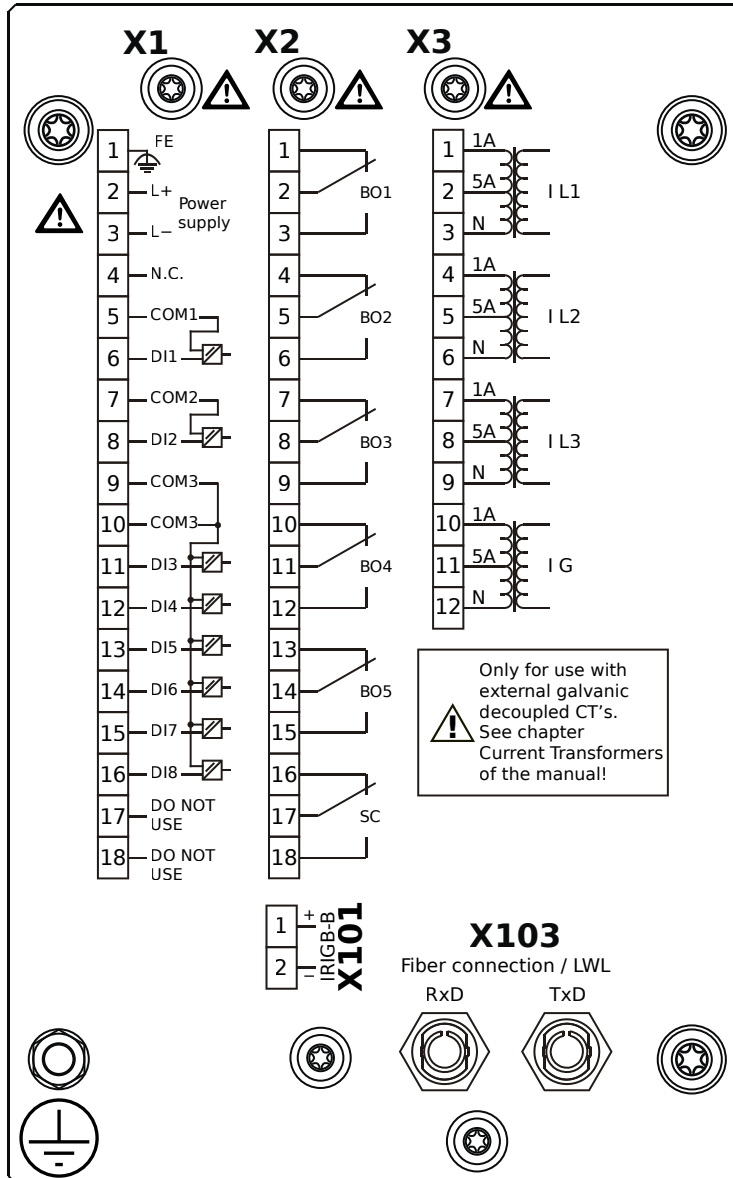

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2A0BFB

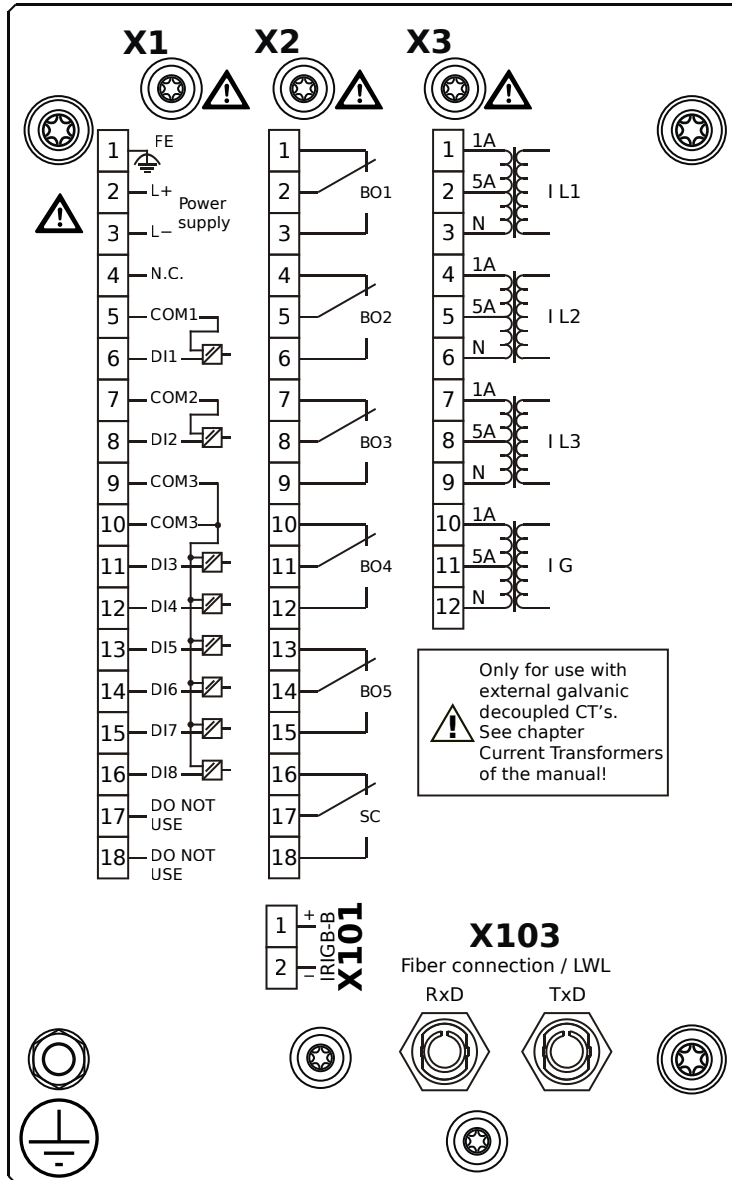


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector


MRM4-2A0BGA

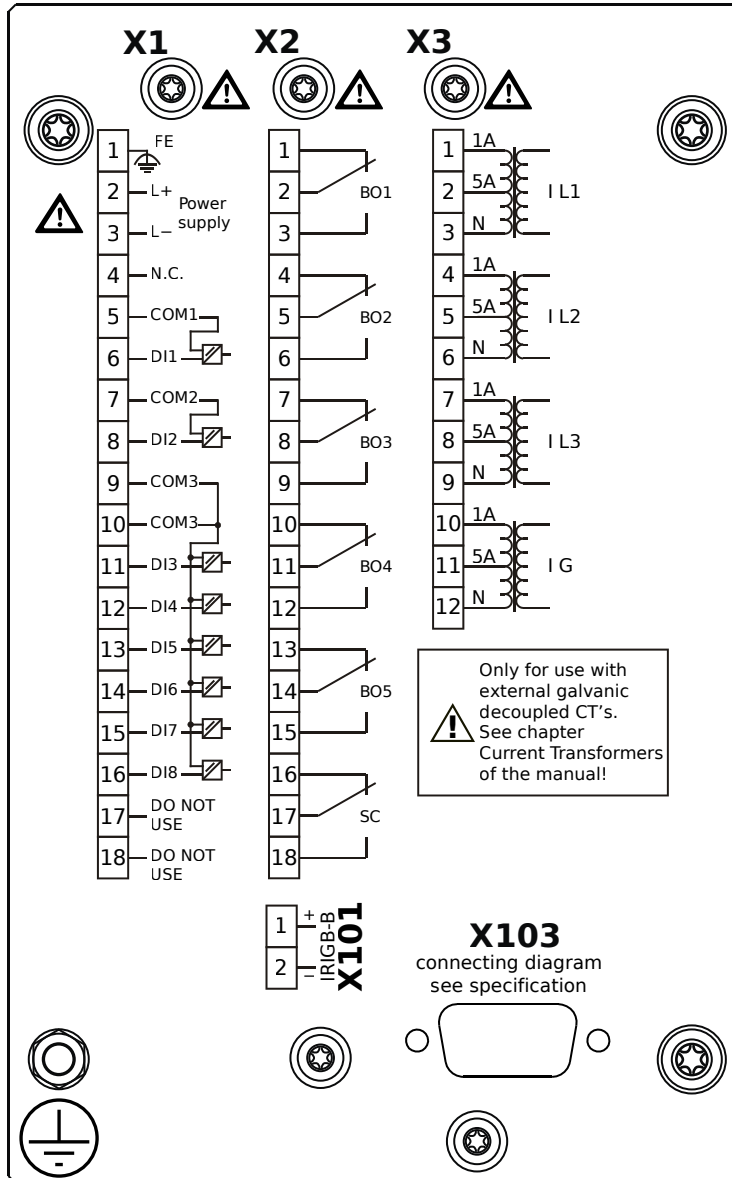

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2A0BGB

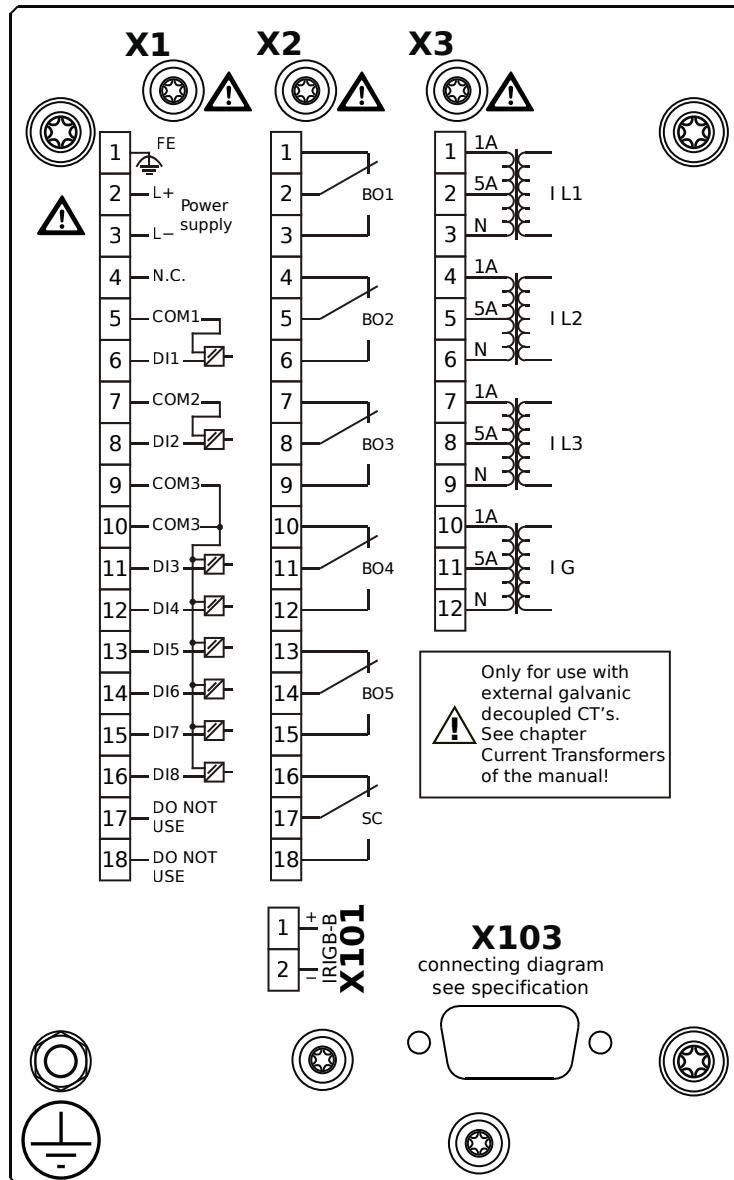


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB


MRM4-2A0BHA

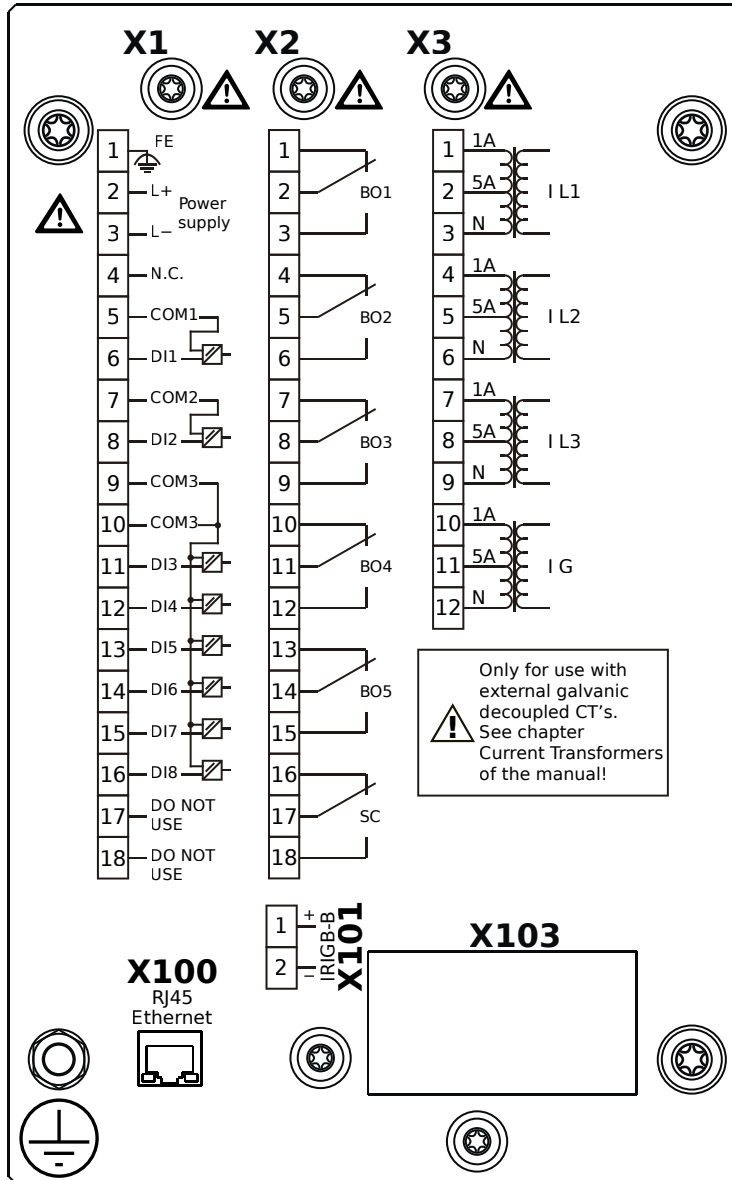

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X100** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X

MRM4-2A0BHB

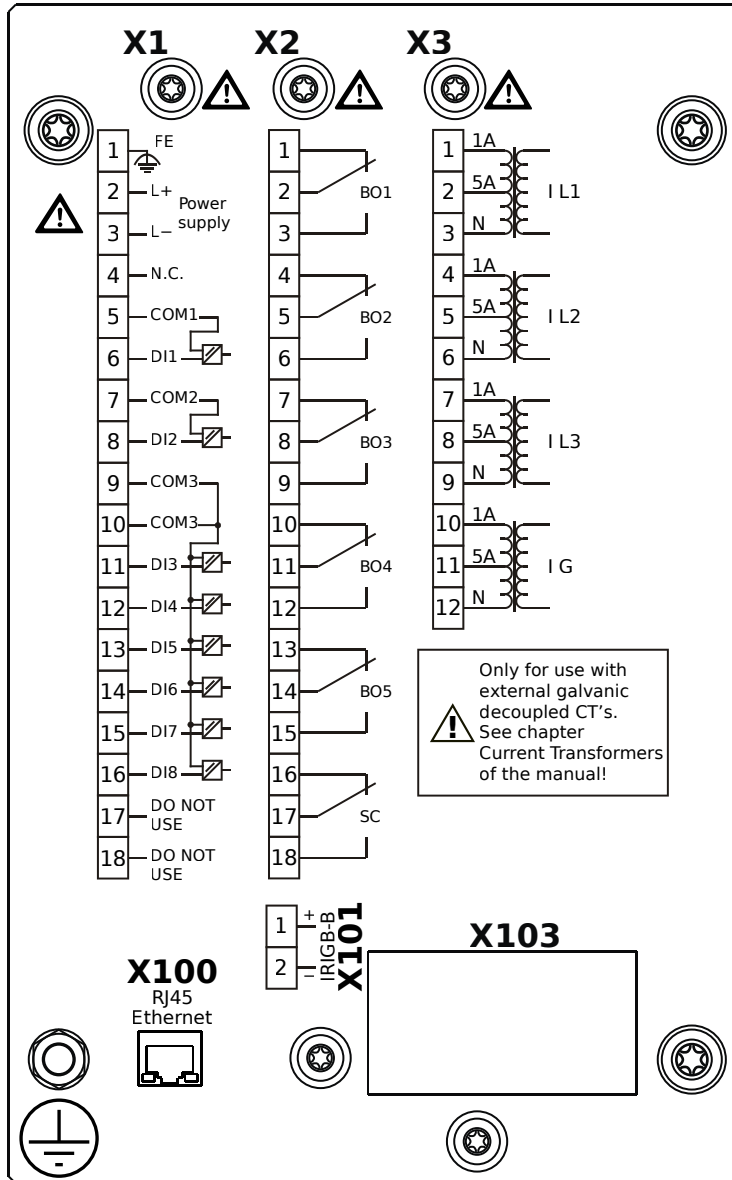

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs

X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact


X3 – TI: Standard current measuring card

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

FX)

X101 – IRIG-B00X


MRM4-2A0BIA

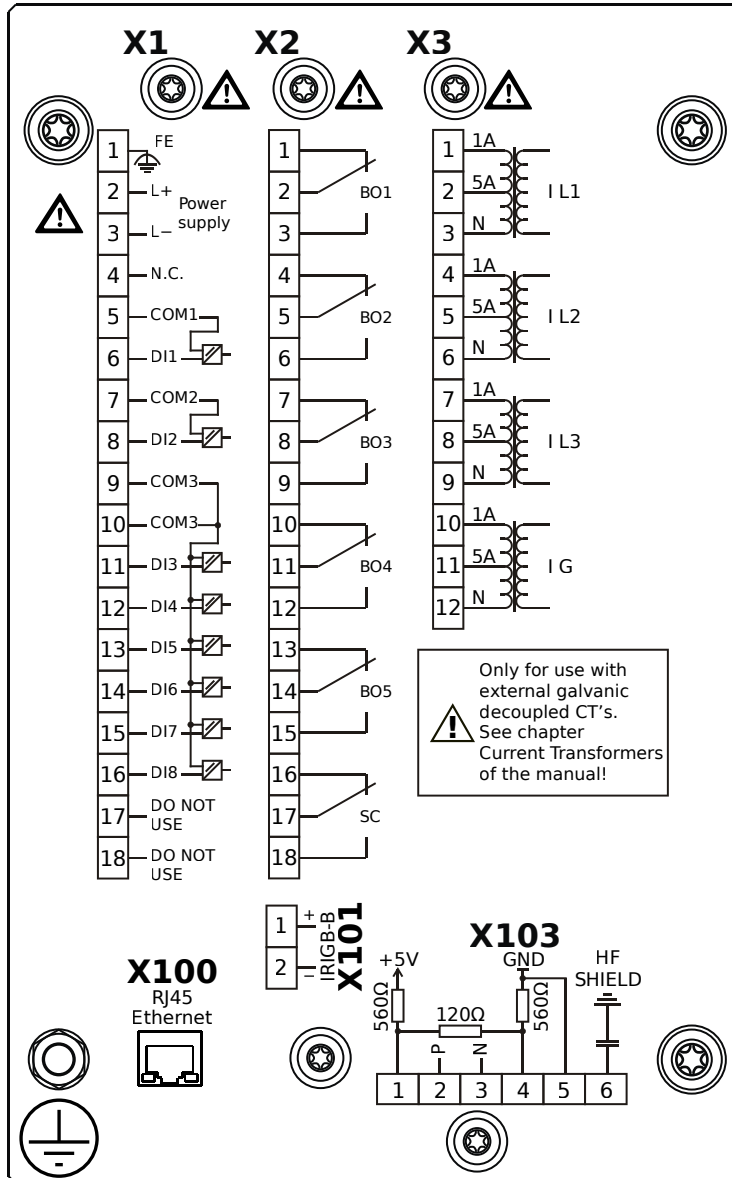

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2A0BIB

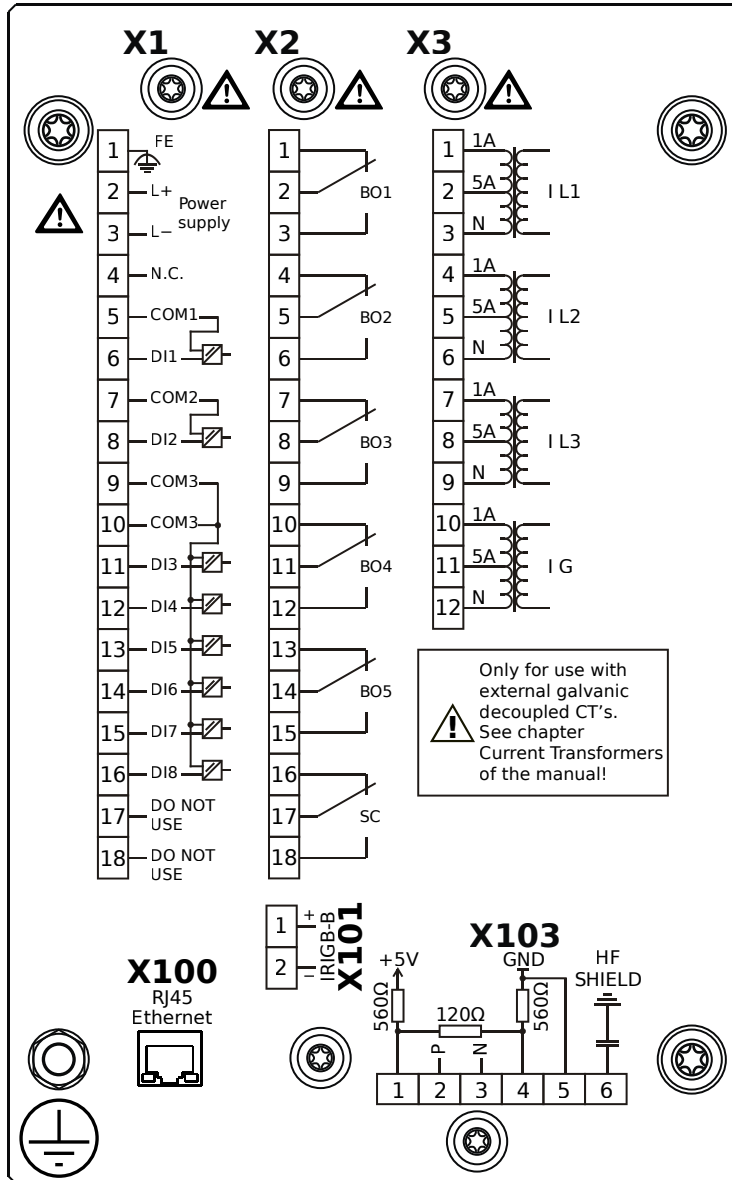


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals


MRM4-2A0BKA

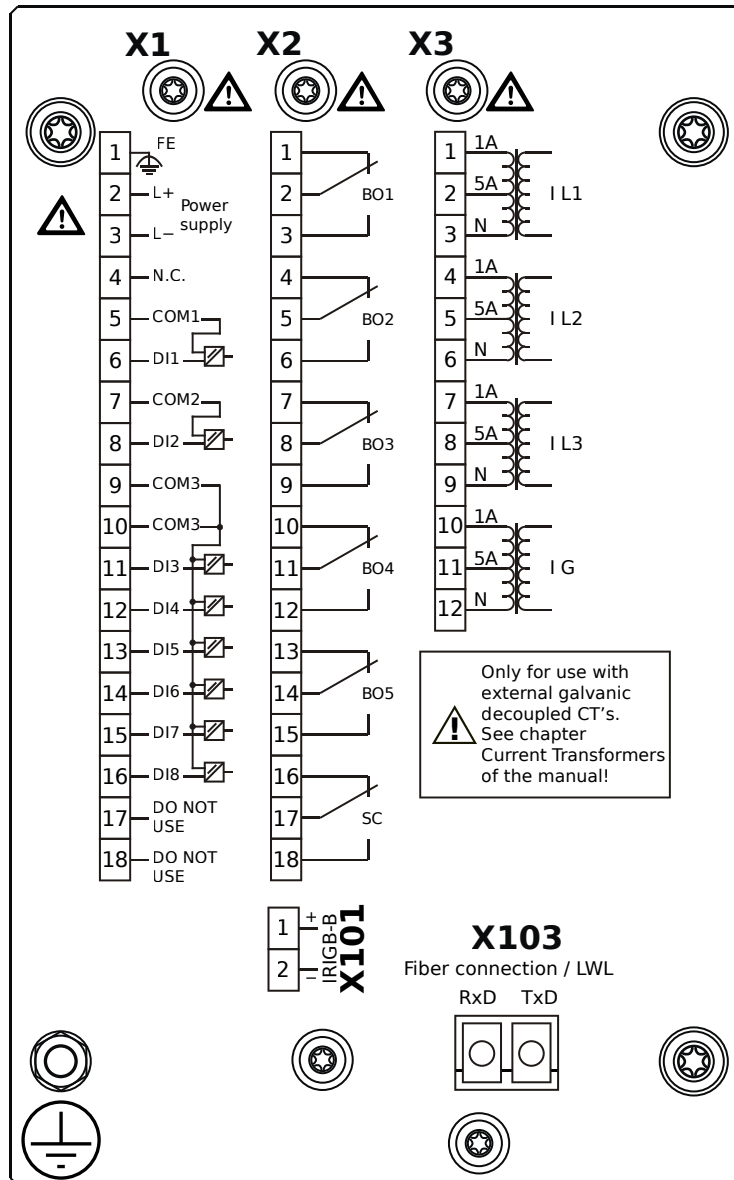

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2A0BKB

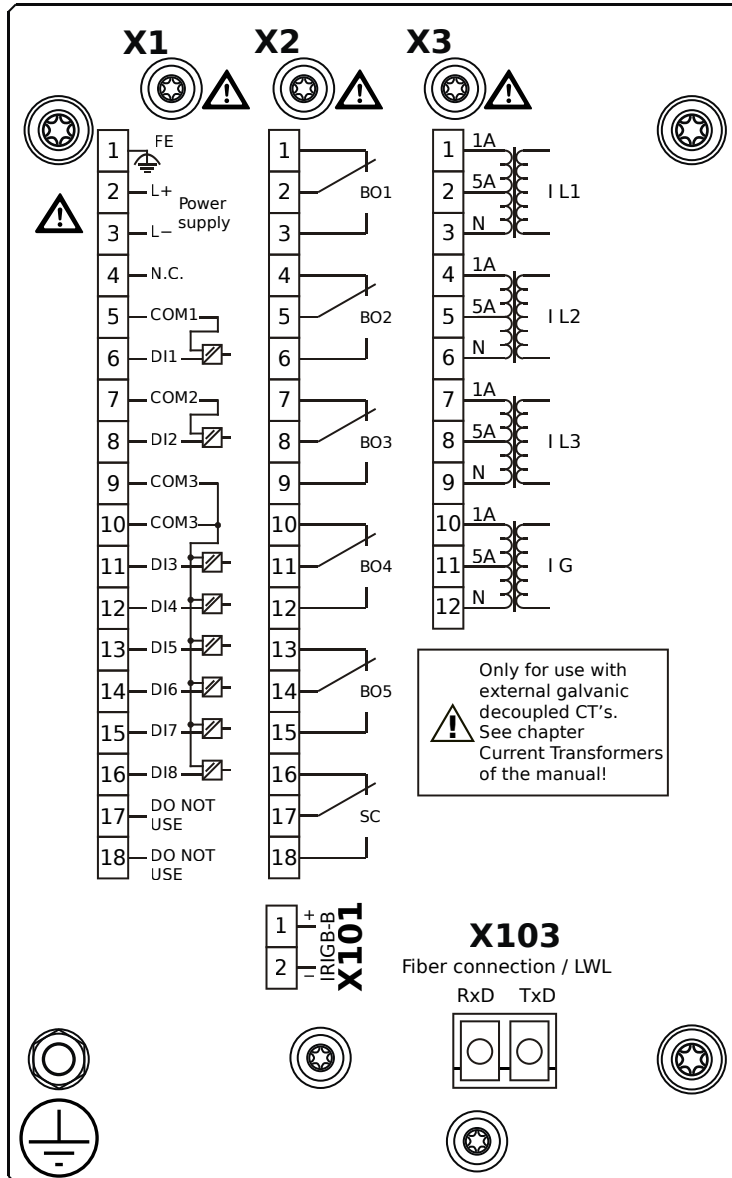


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector


MRM4-2A0BLA

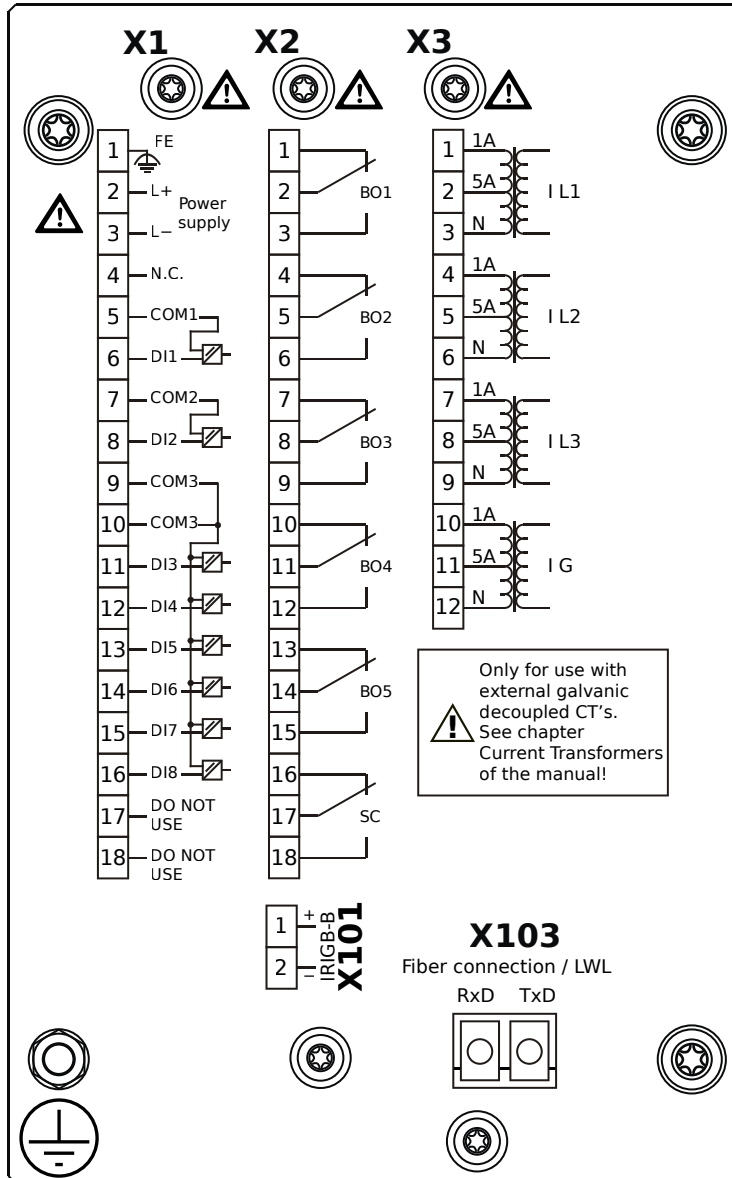

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2A0BLB

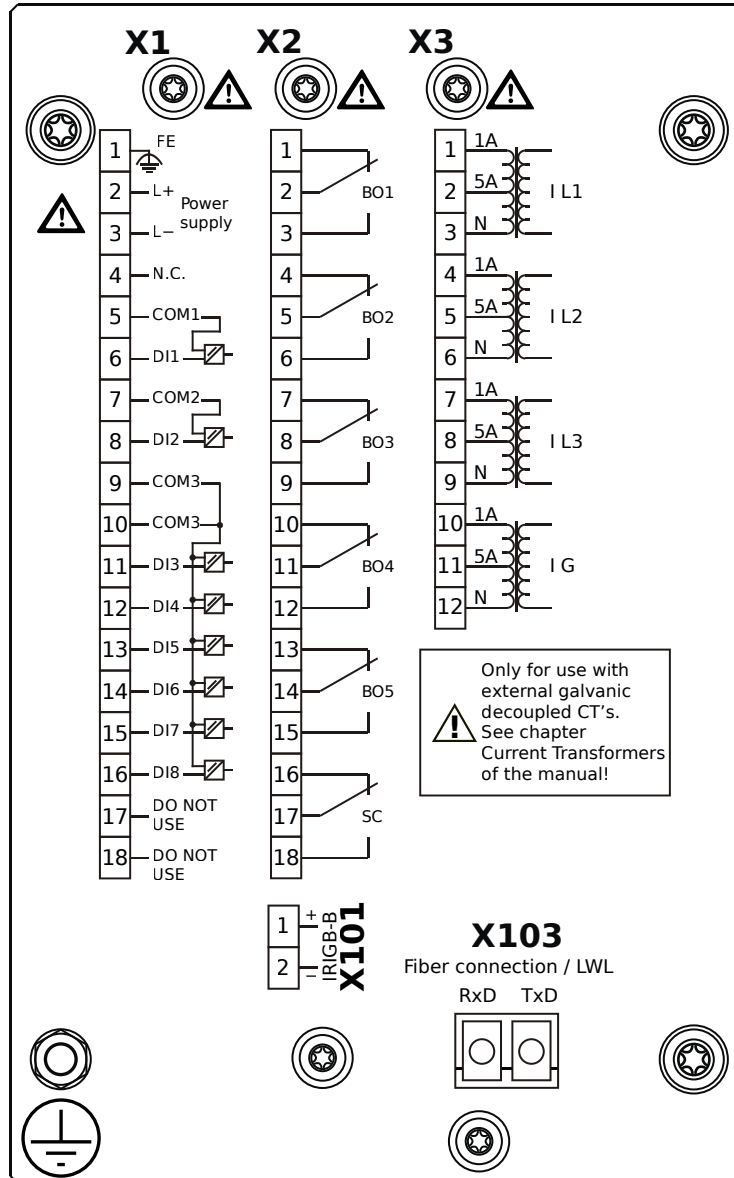


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector


MRM4-2A0BOA

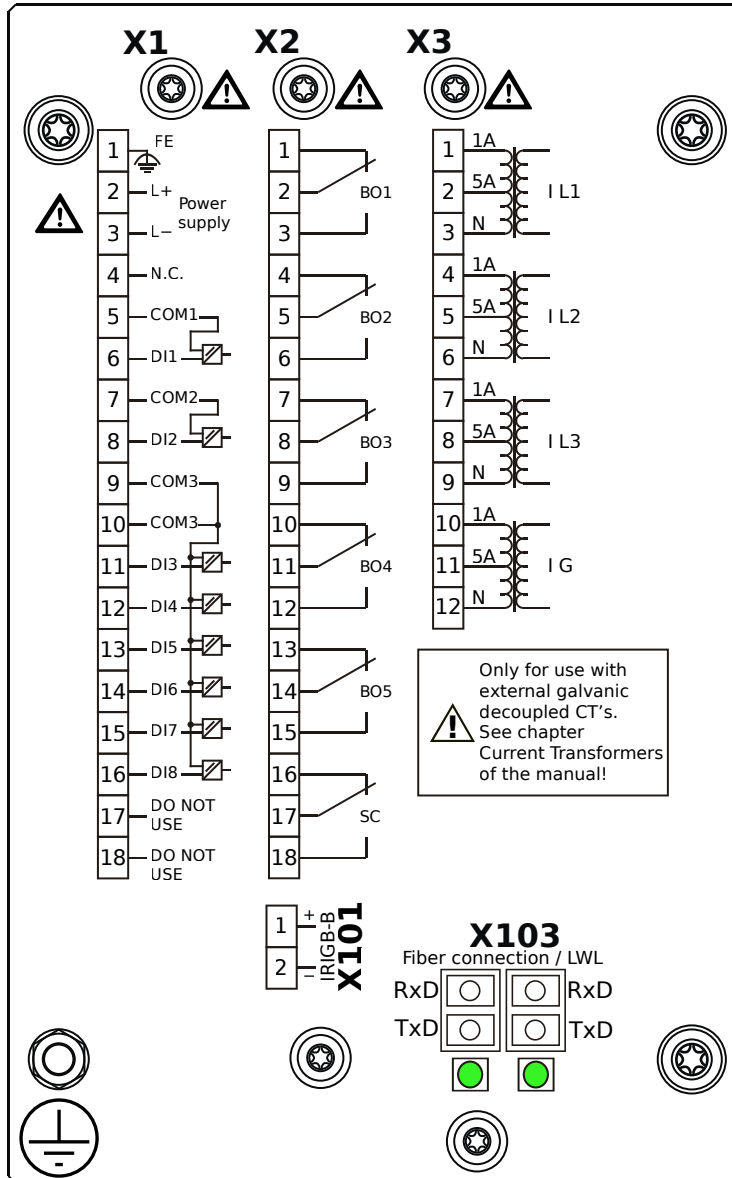

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A0BOB

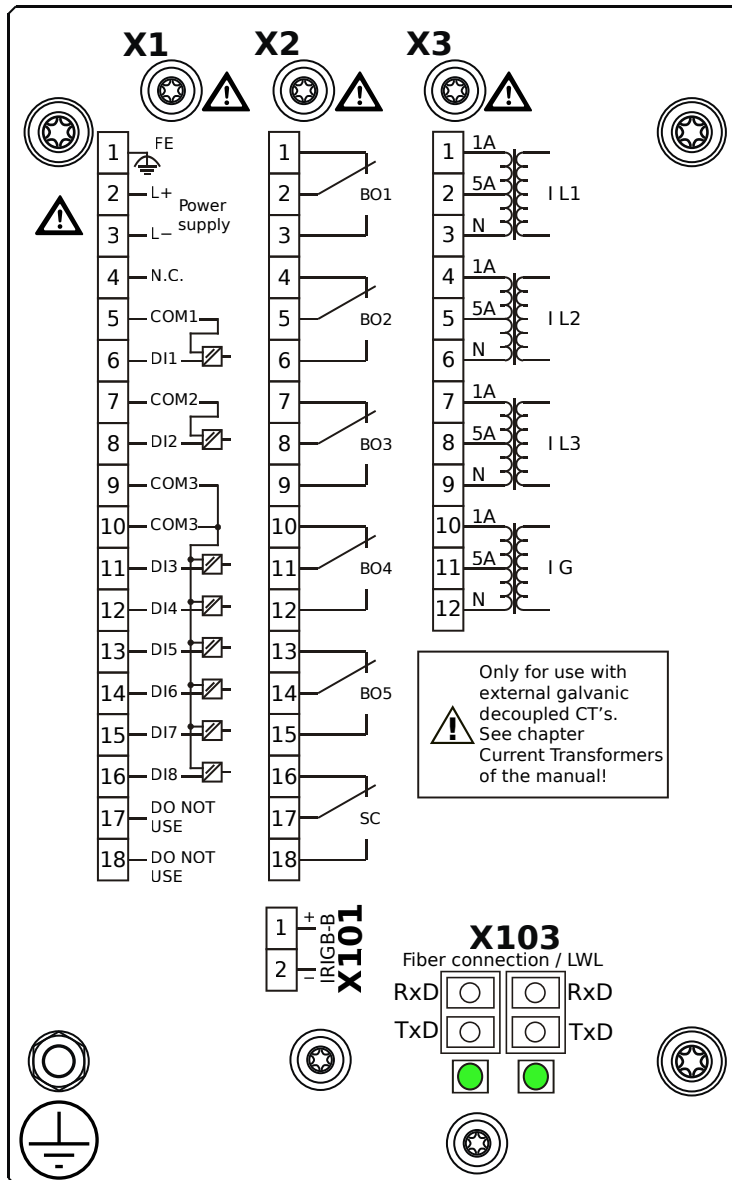


Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector


MRM4-2A0BPA

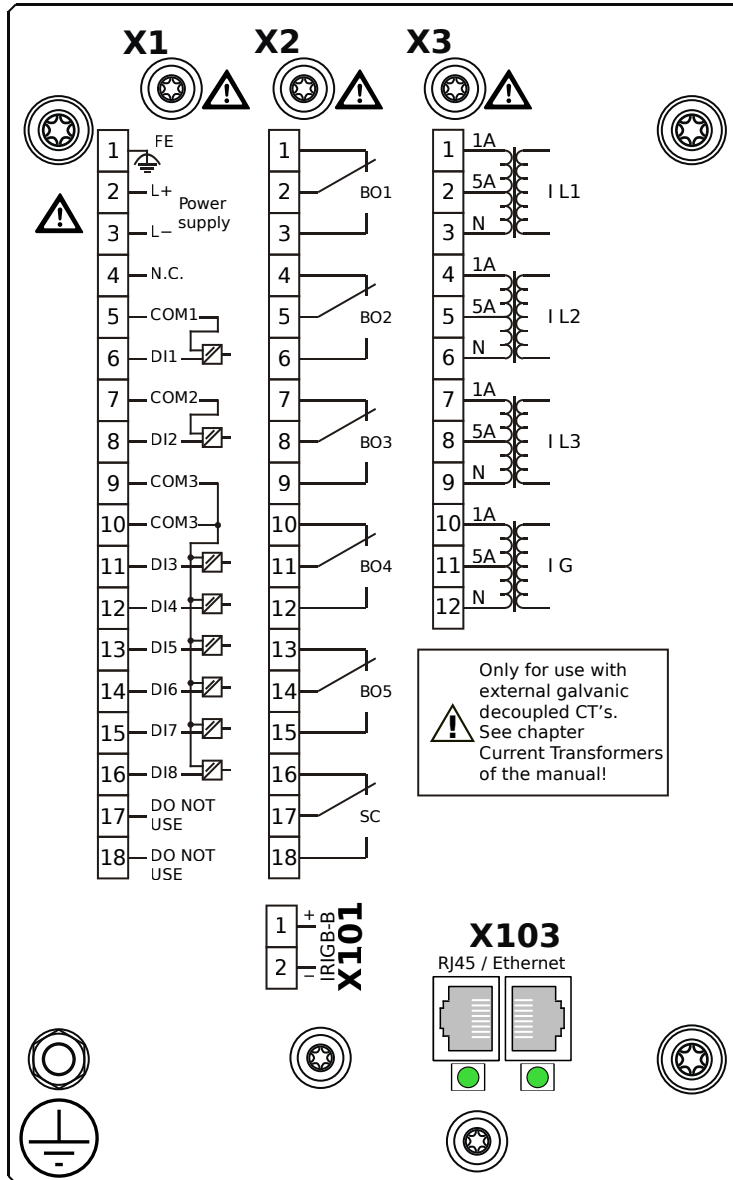

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2A0BPB

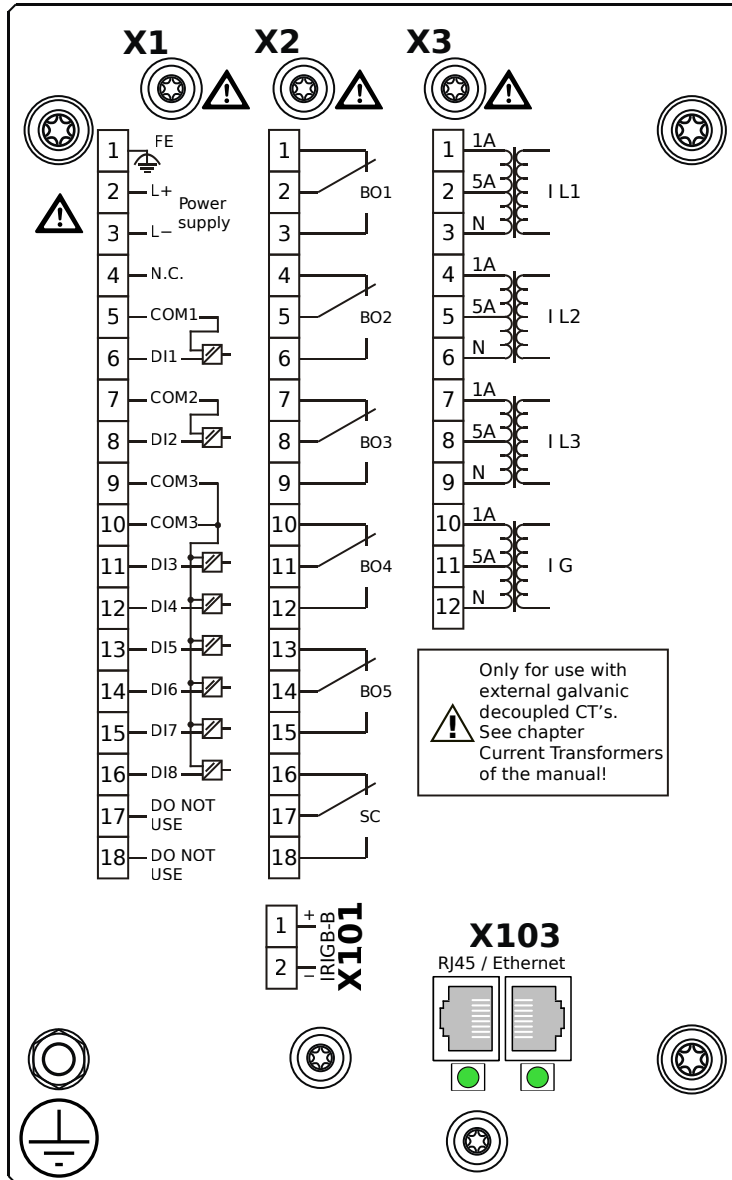

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)


MRM4-2A0BQA

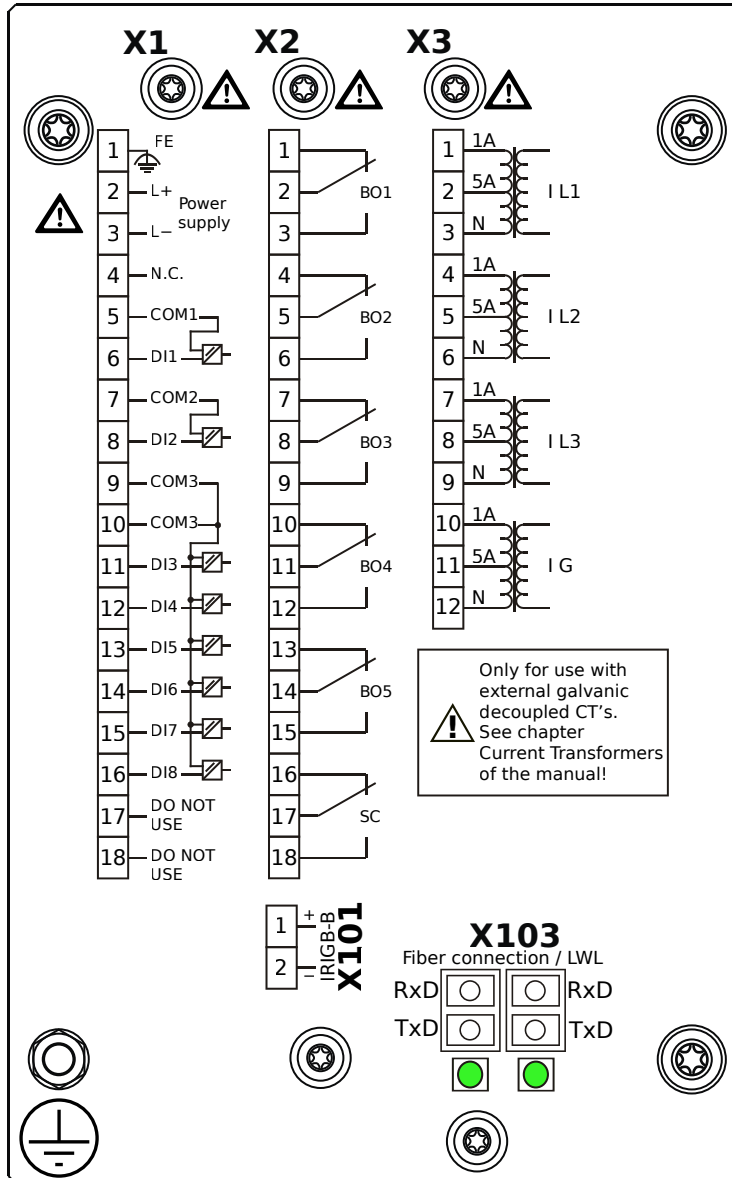

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A0BQB

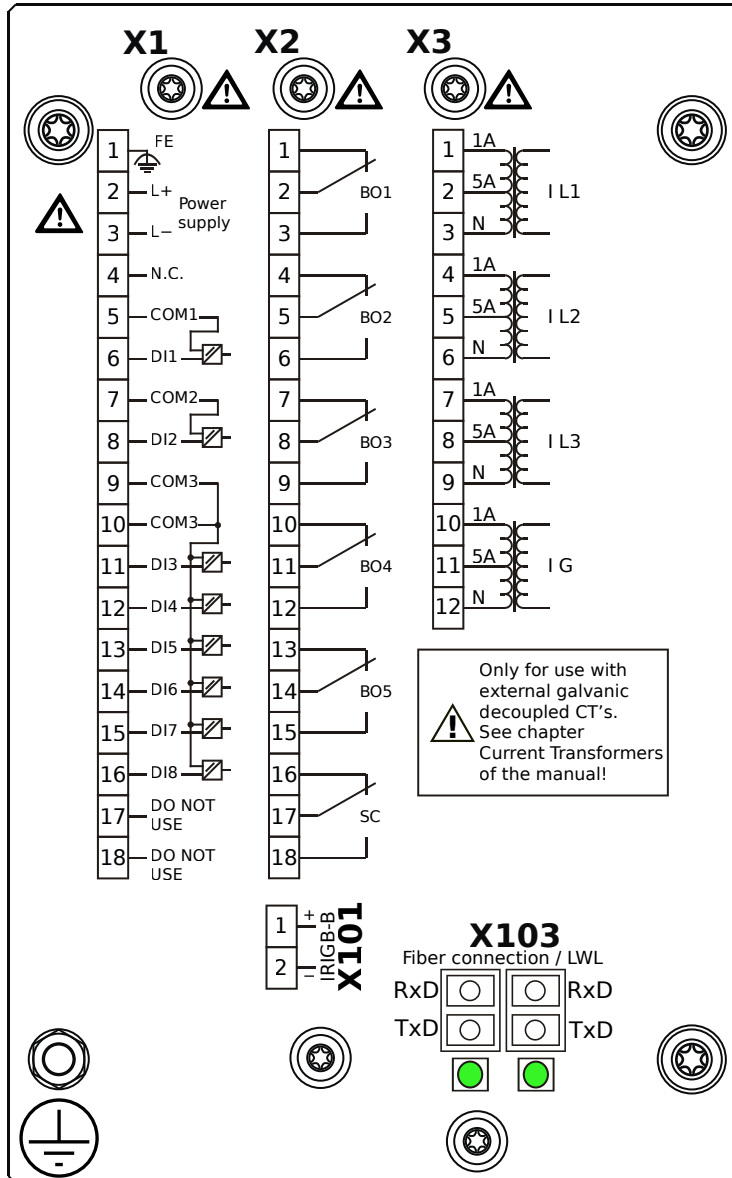

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A0BRA

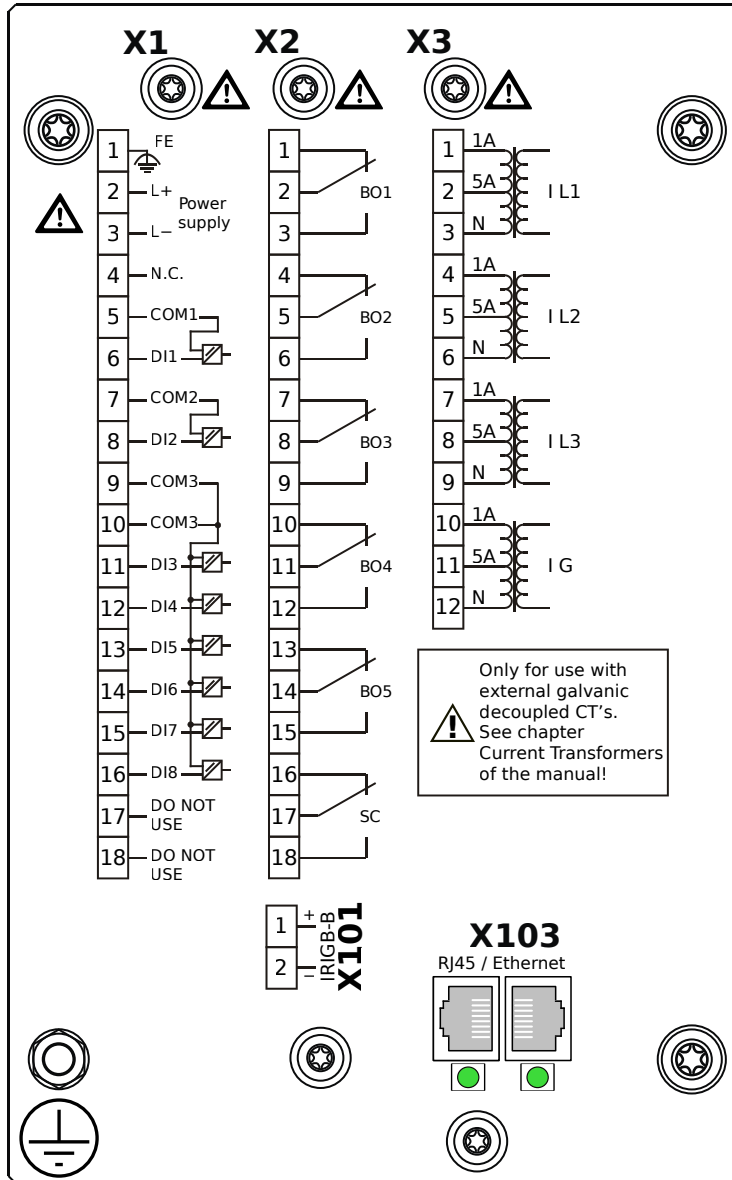

Housing B1, small display, 19" rack mounting

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2A0BRB

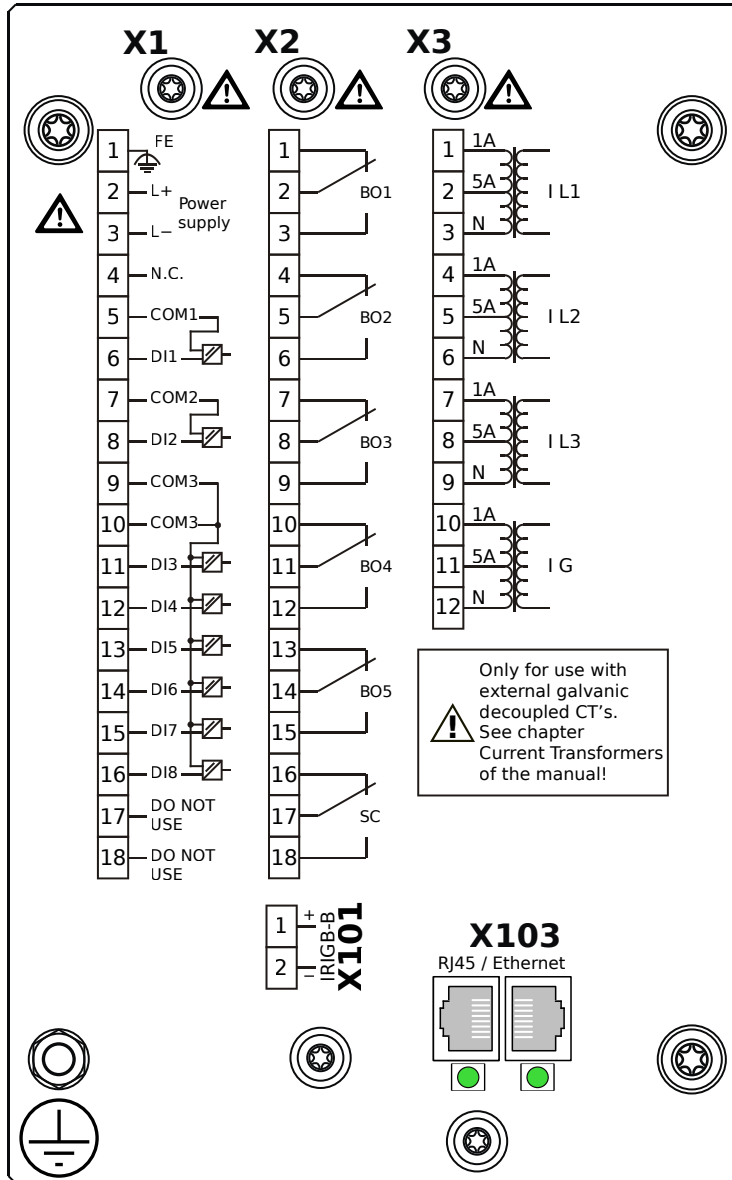

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)


MRM4-2A0BTA

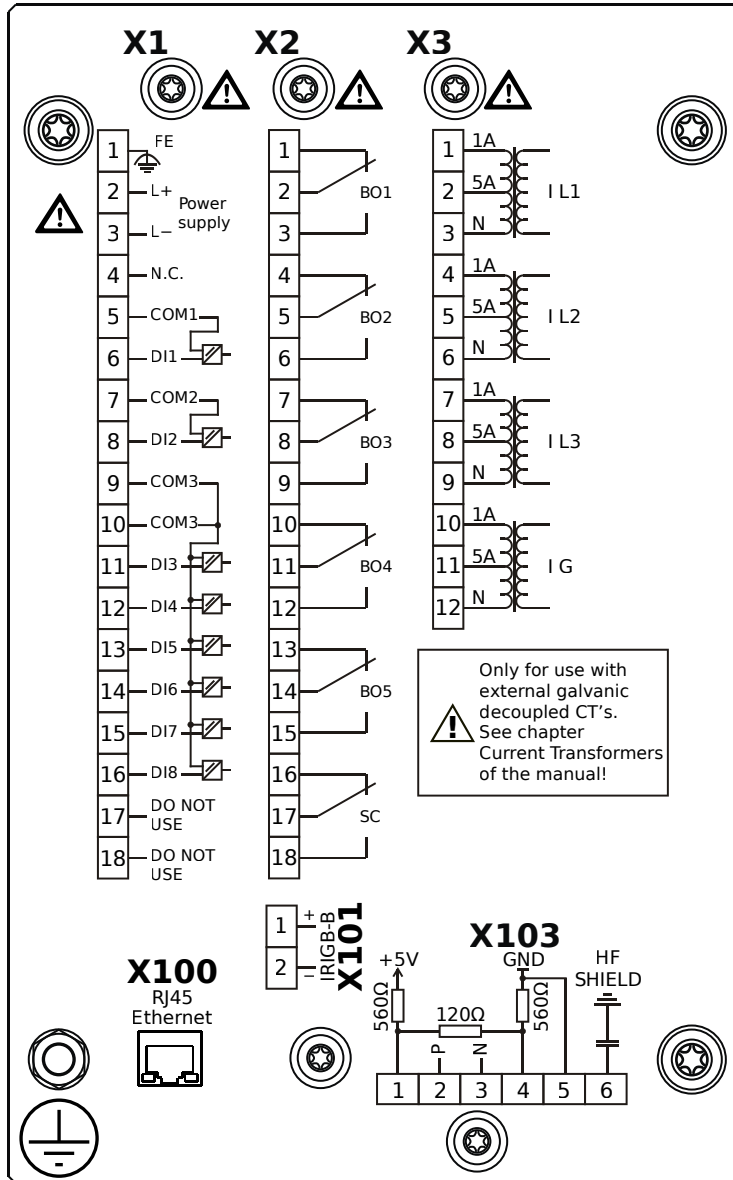

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TI: Standard current measuring card
- X100** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2A0BTB

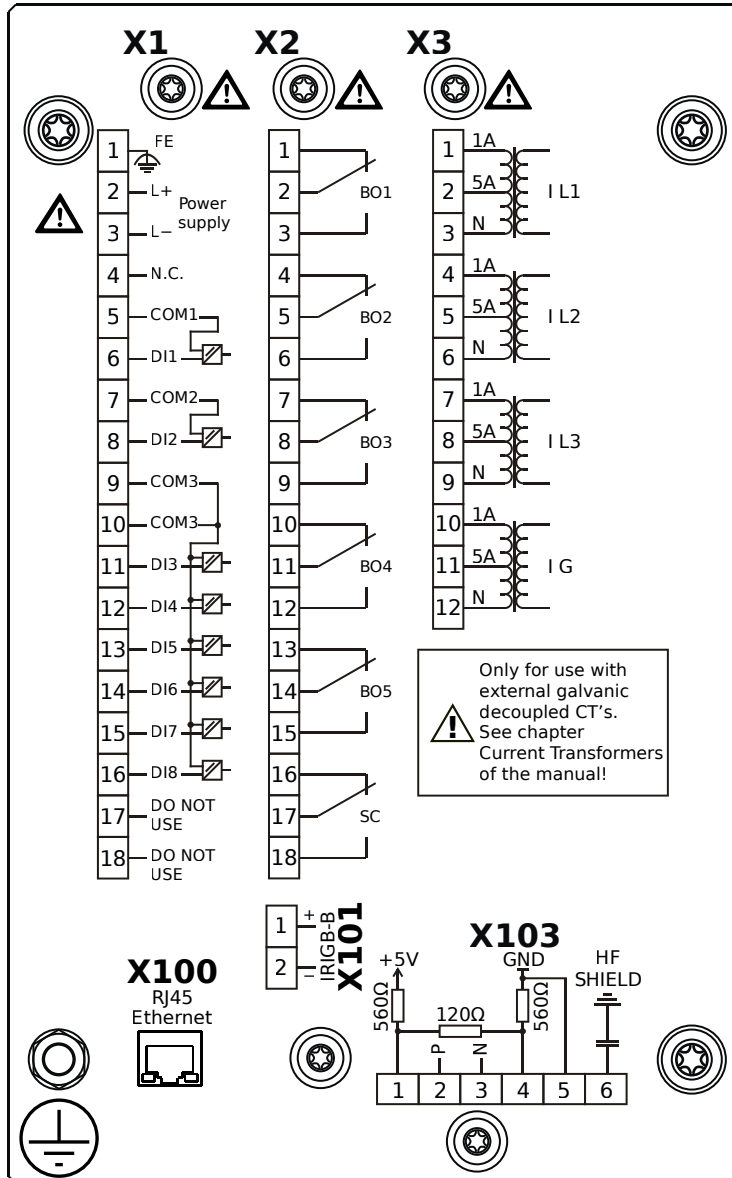

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs

X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TI: Standard current measuring card


X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

FX)

X101 – IRIG-B00X

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals


MRM4-2A1AAA

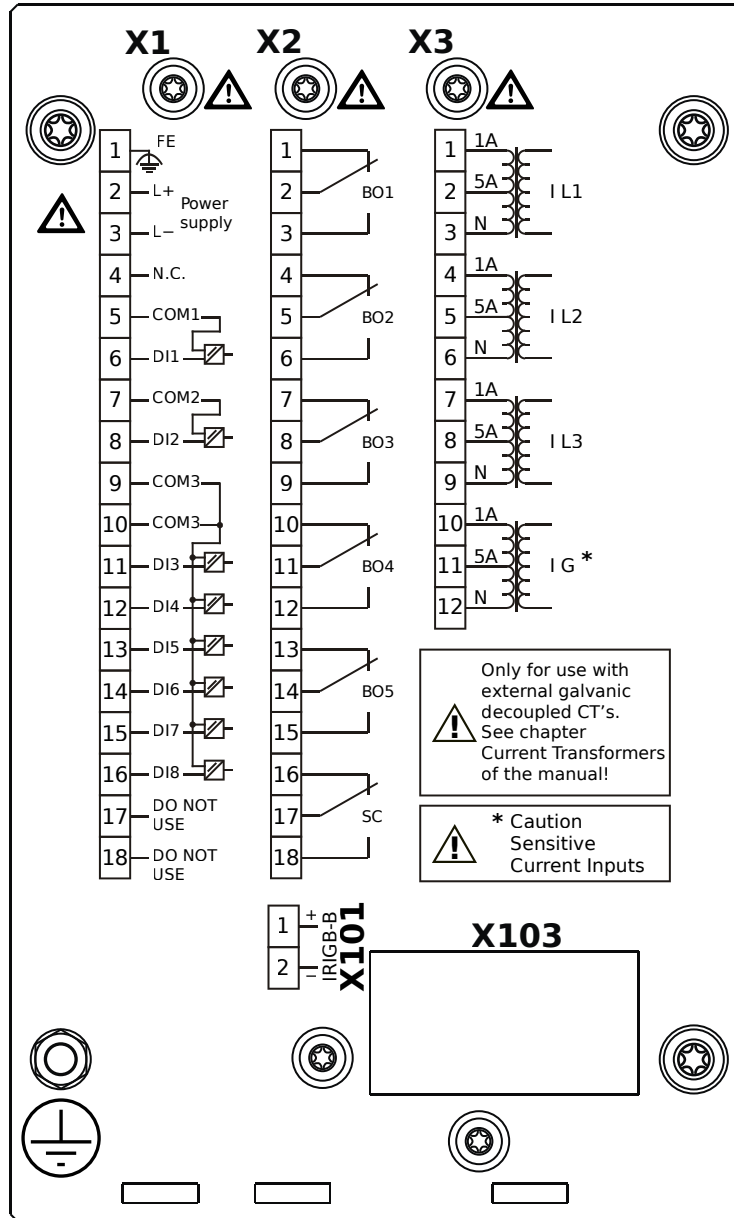

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X

MRM4-2A1AAB

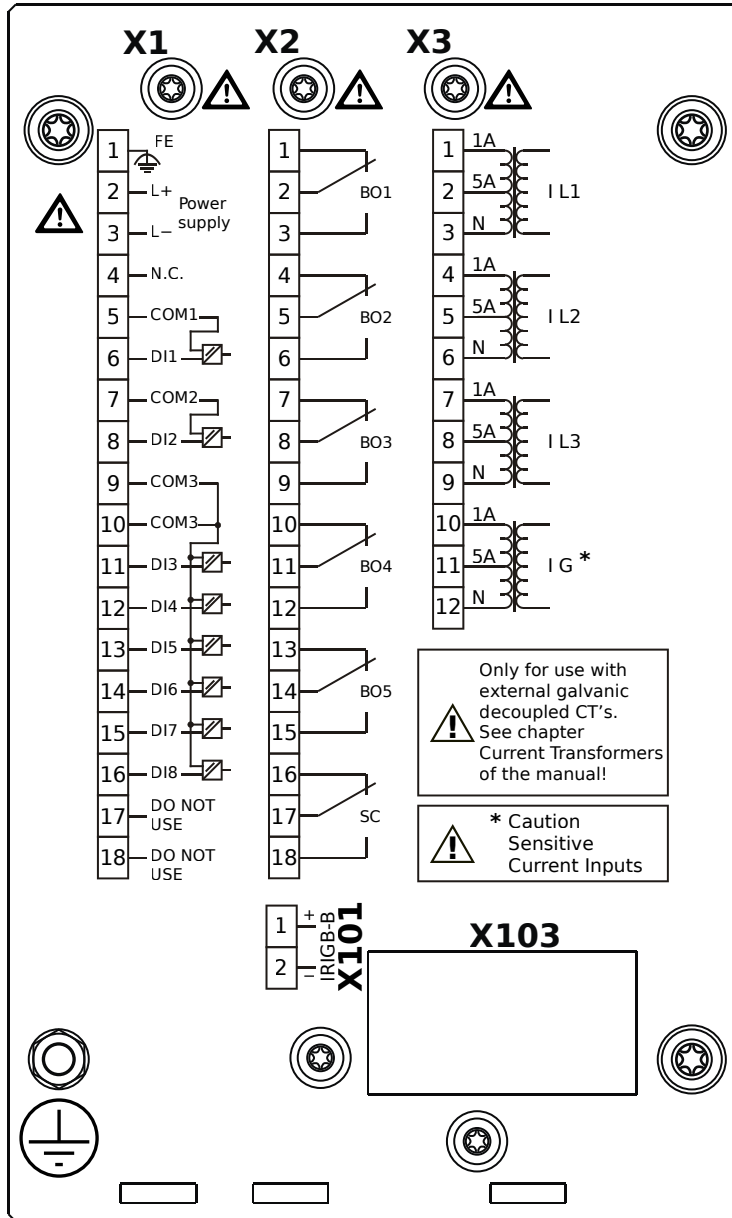


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X


MRM4-2A1ABA

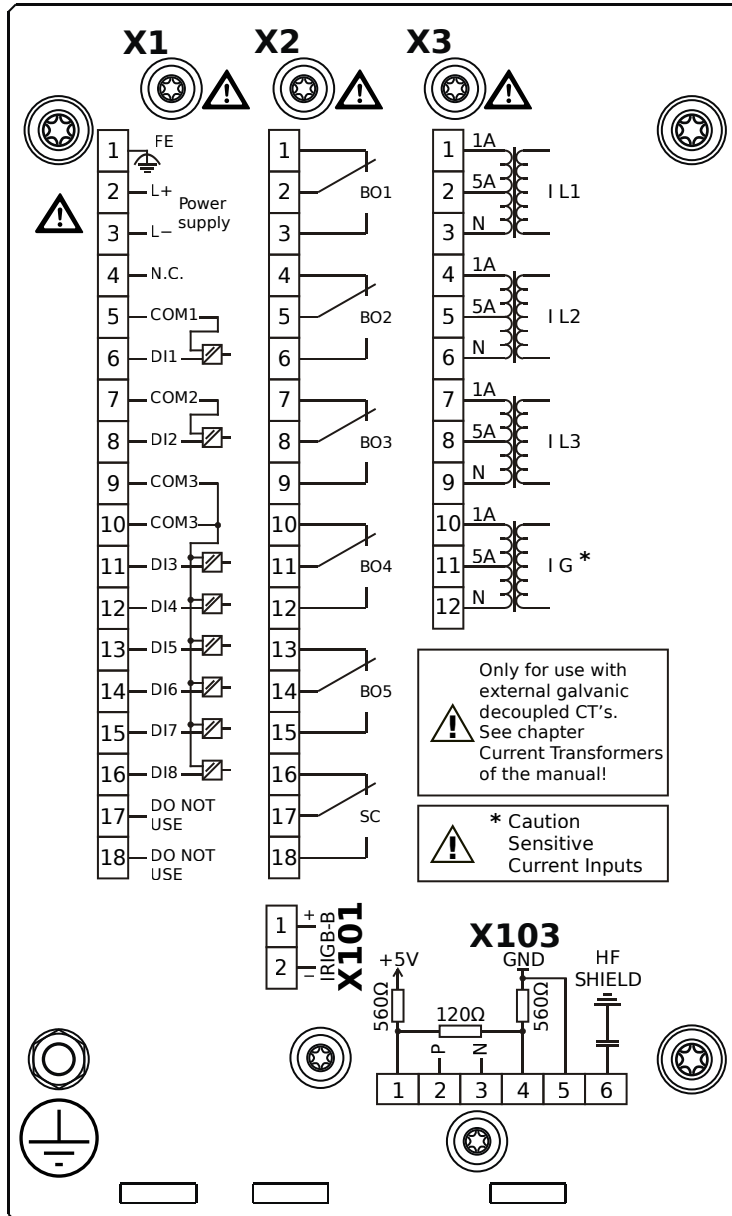

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2A1ABB

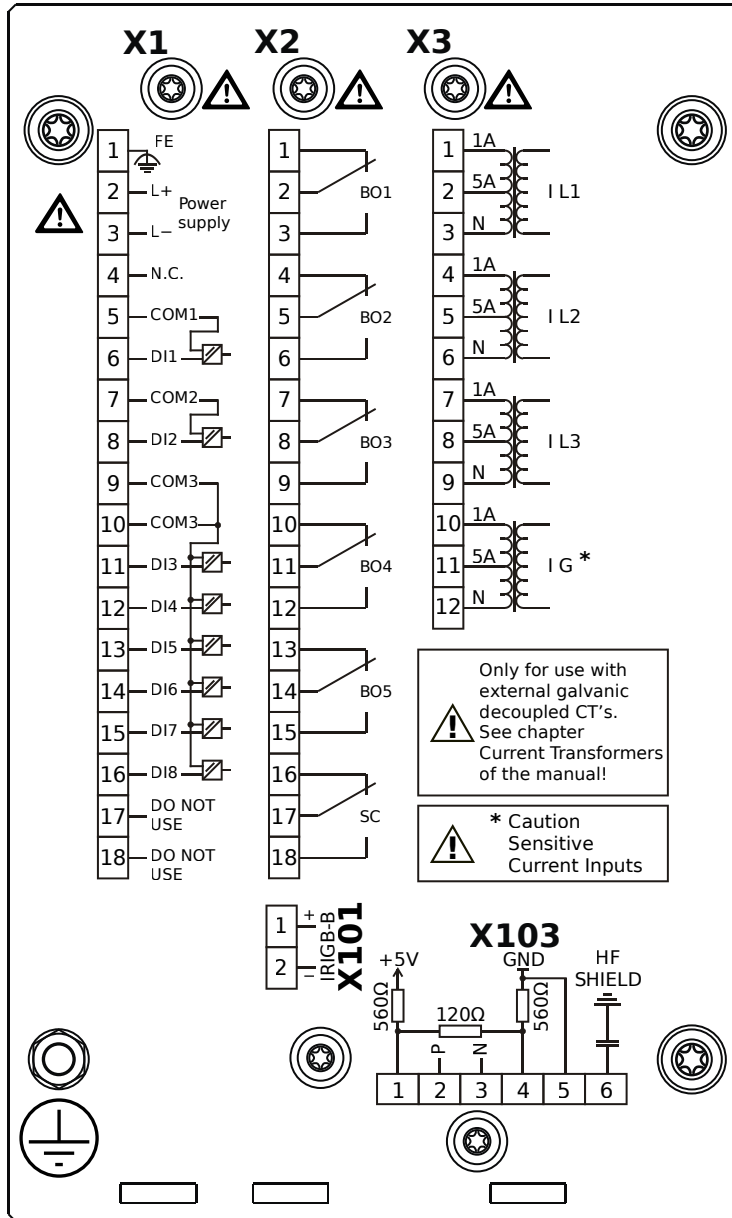


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals


MRM4-2A1ACA

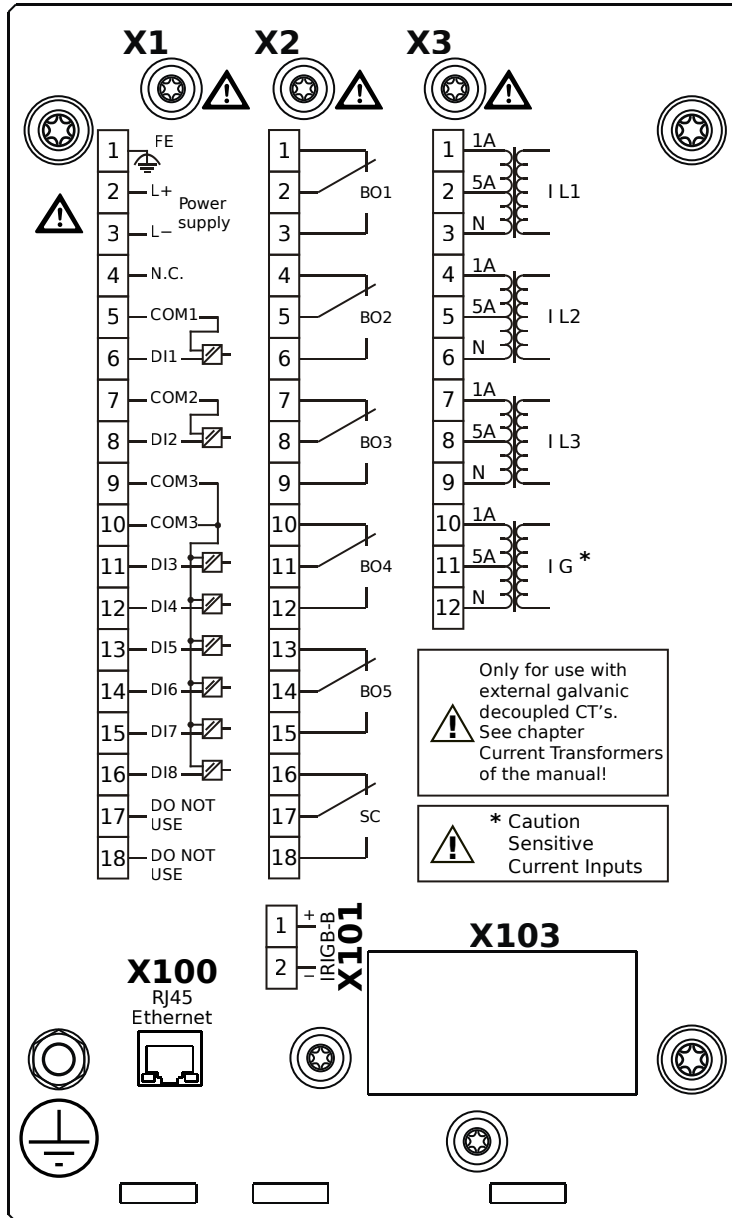

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X

MRM4-2A1ACB

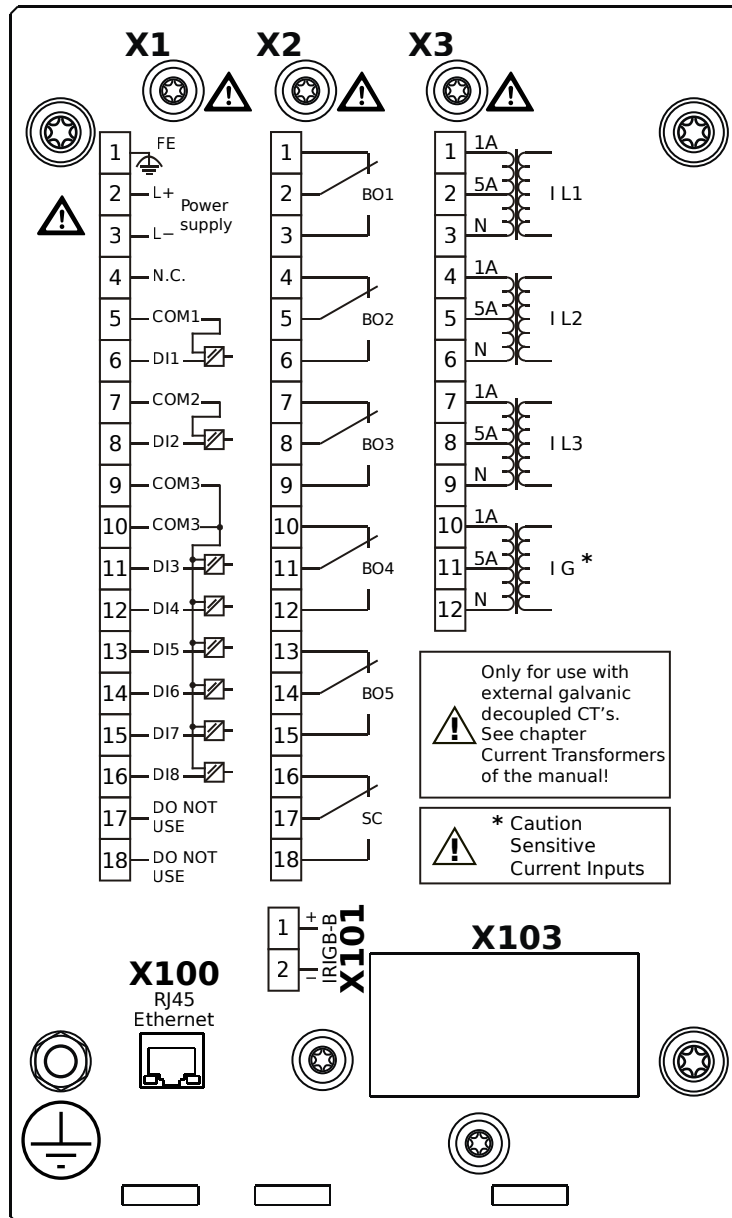


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X


MRM4-2A1ADA

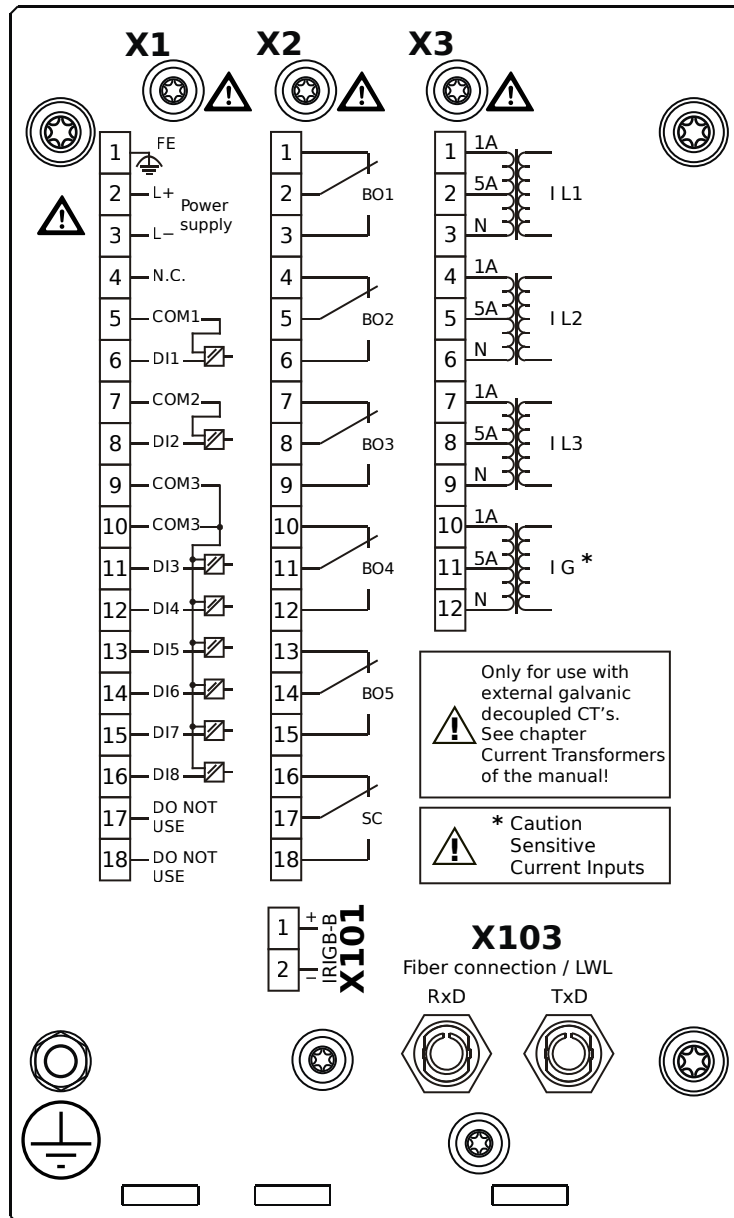

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2A1ADB

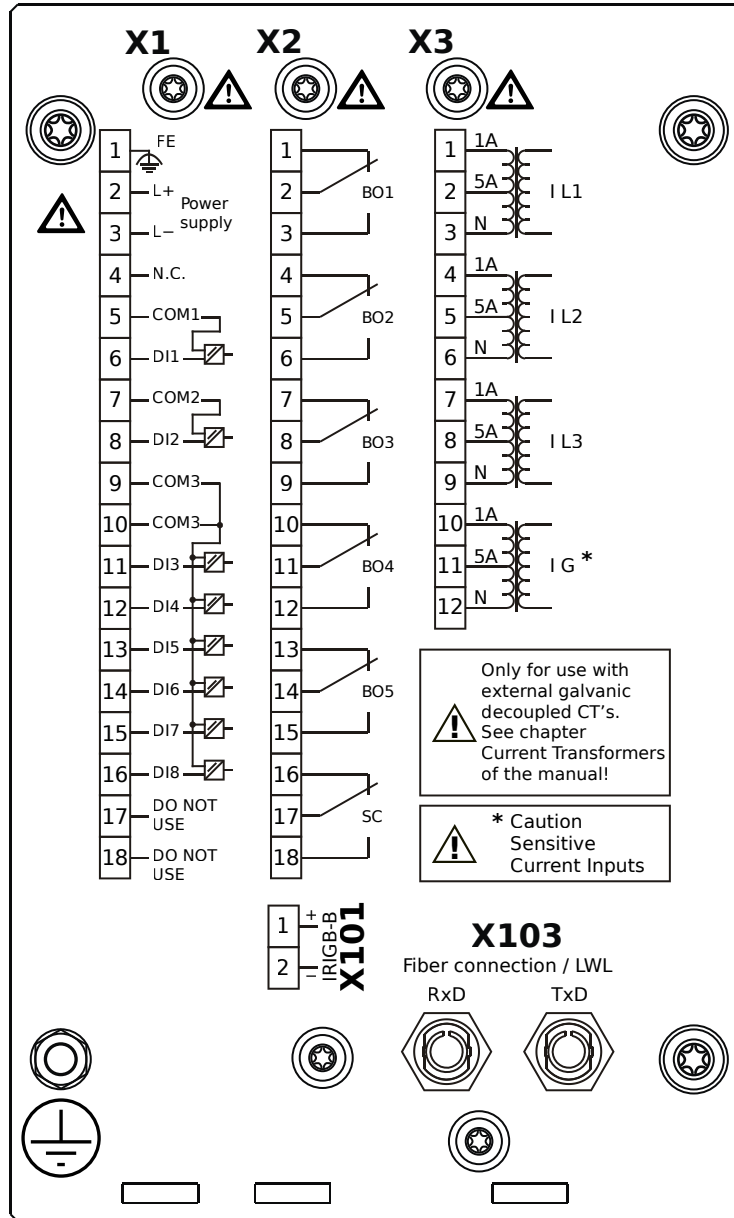


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Profibus-DP, Fiber optics interface, ST Connector


MRM4-2A1AEA

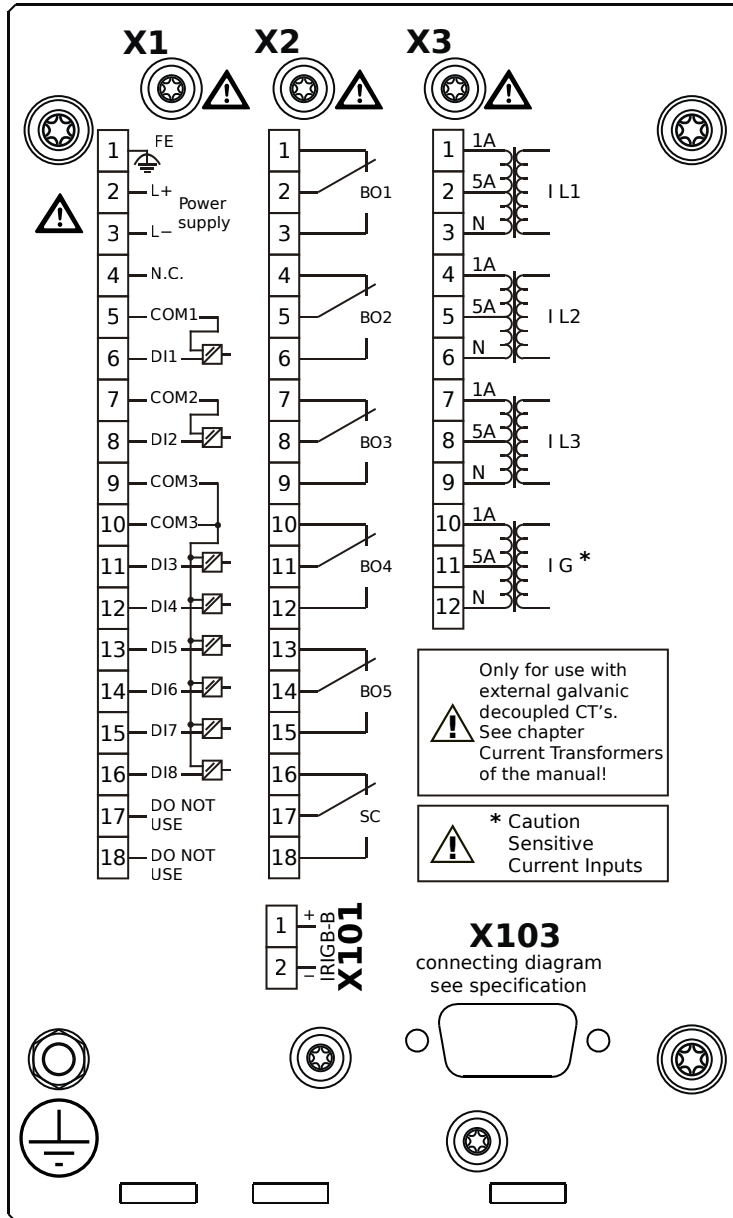

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Profibus-DP, RS485, D-SUB

MRM4-2A1AEB

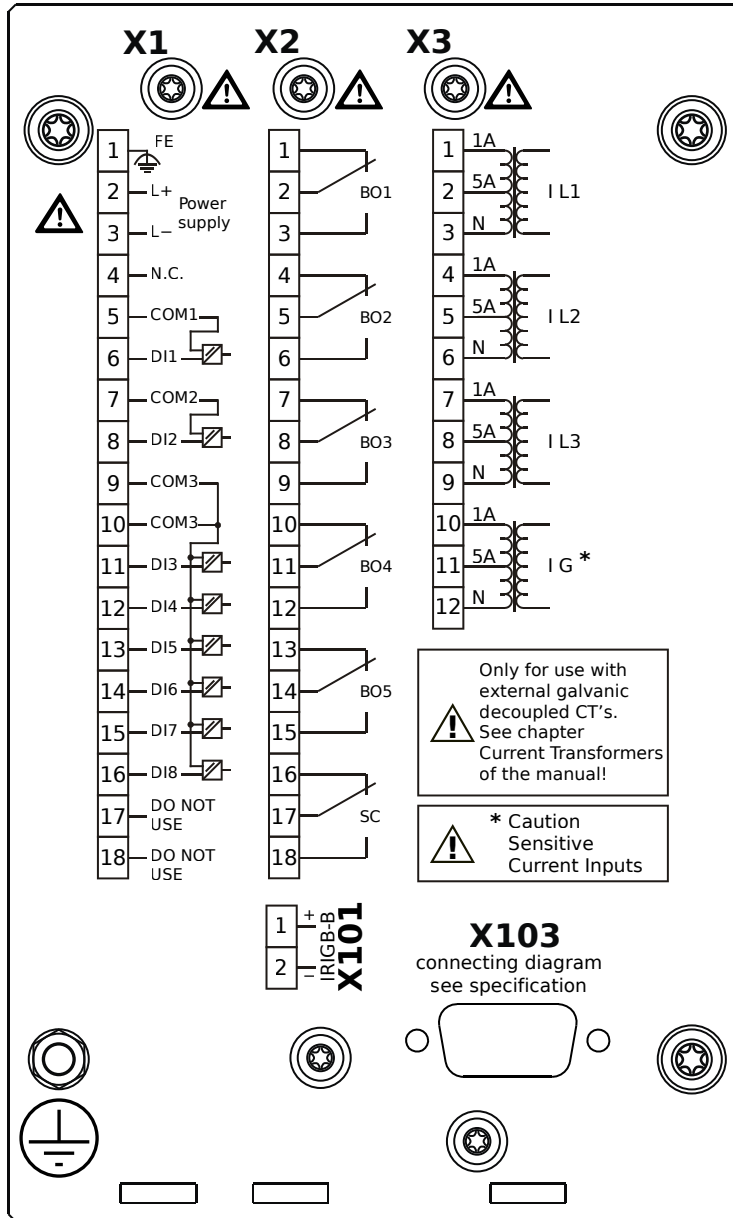


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Profibus-DP, RS485, D-SUB


MRM4-2A1AFA

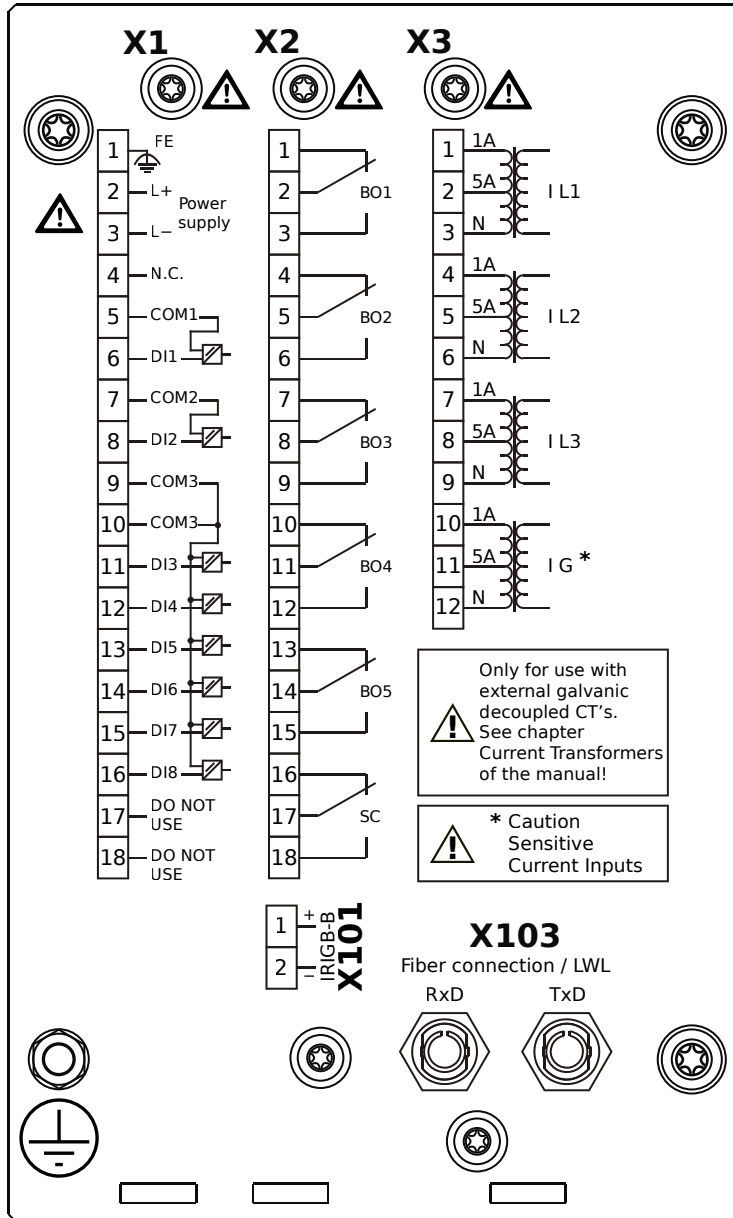

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2A1AFB

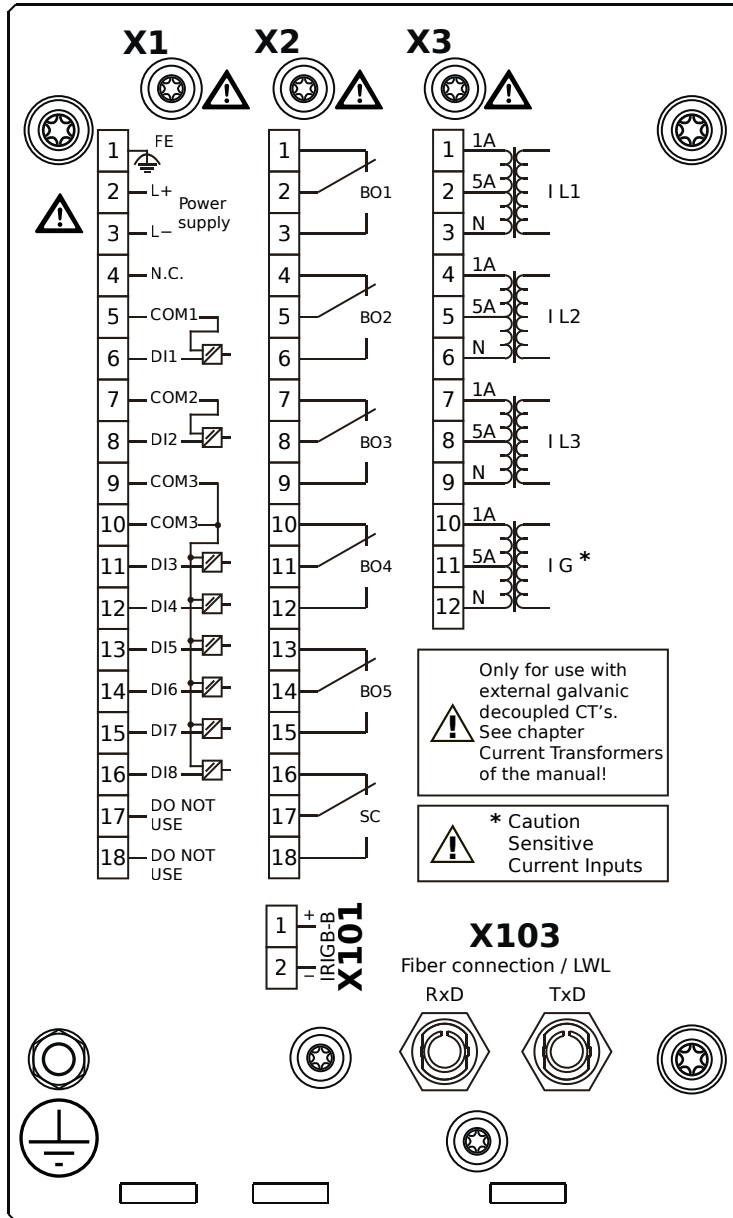


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector


MRM4-2A1AGA

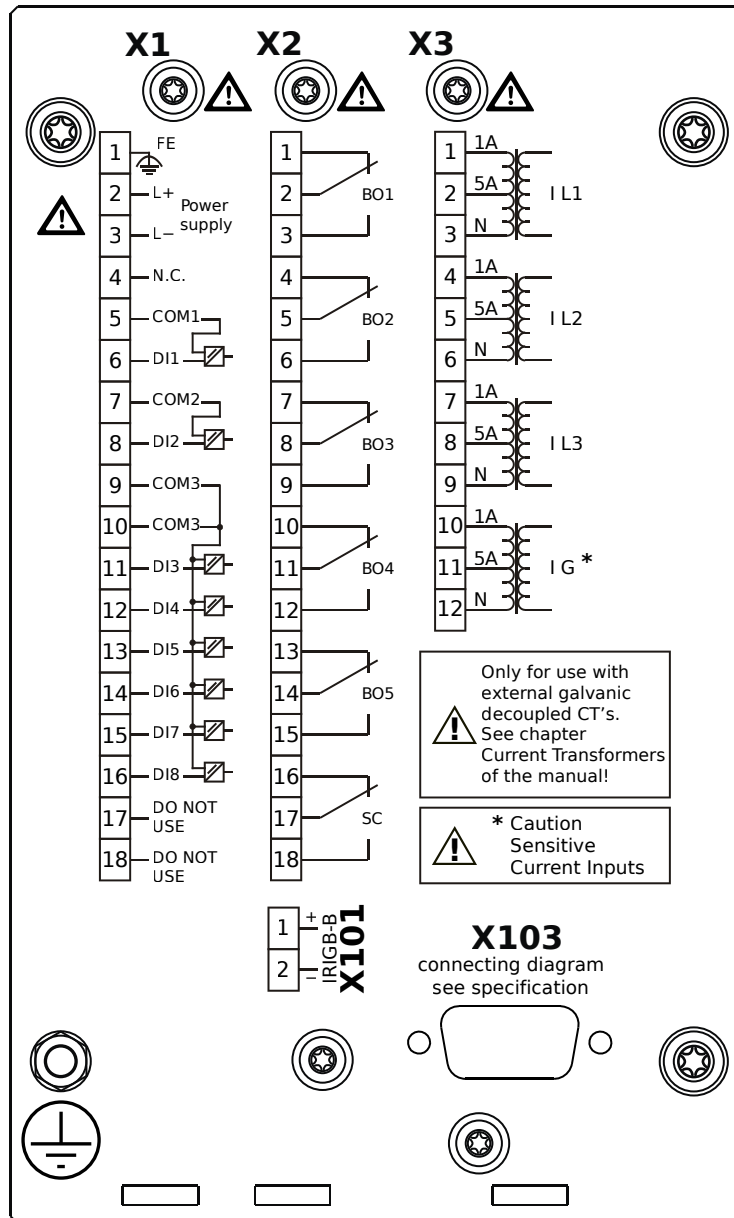

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2A1AGB

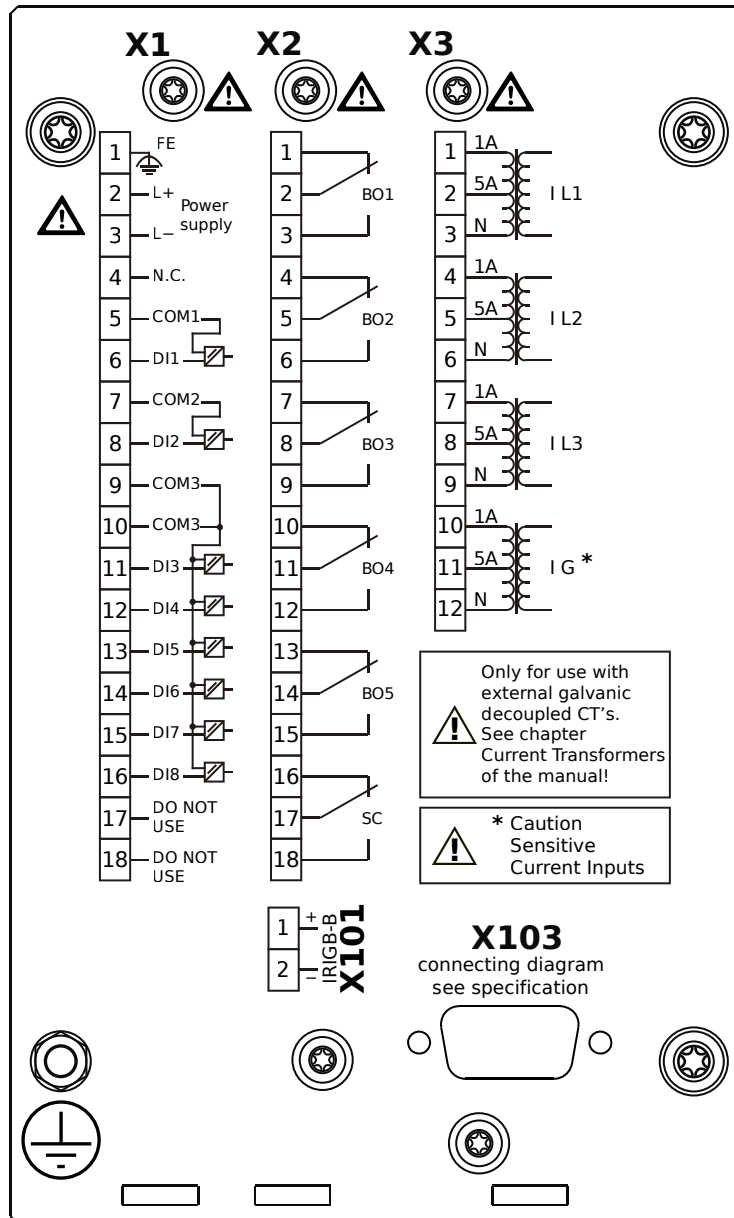


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB


MRM4-2A1AHA

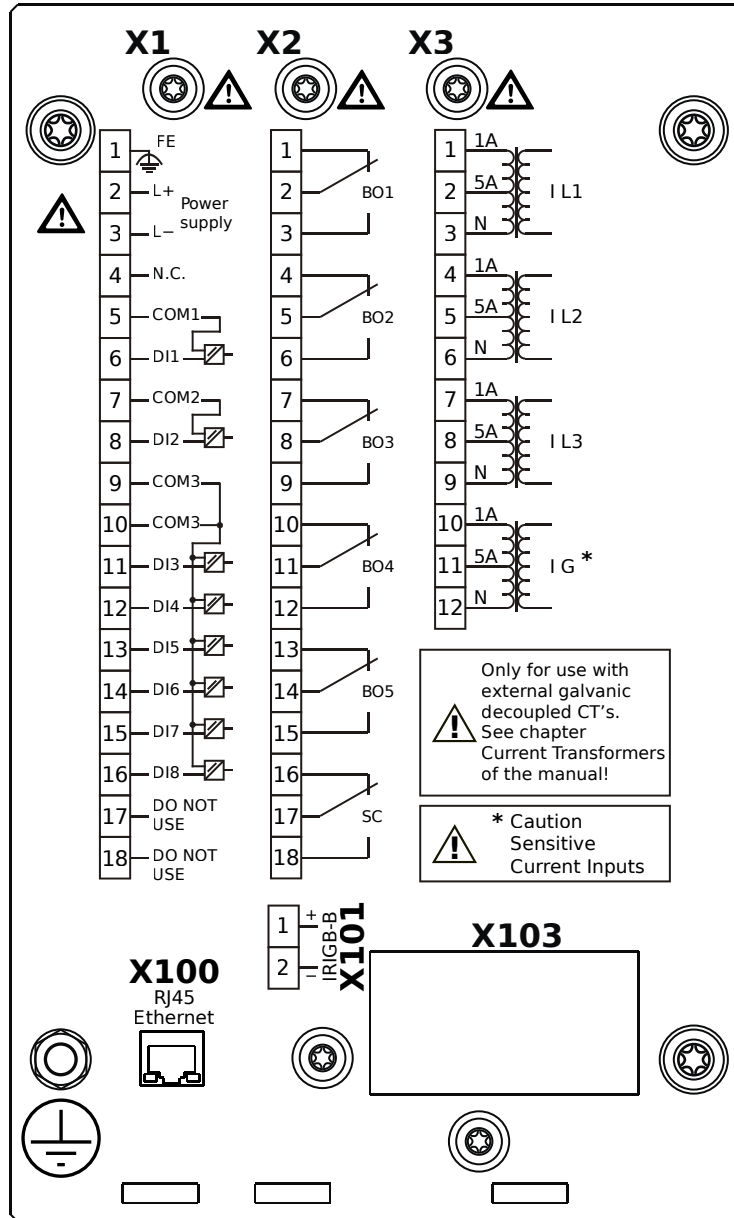

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X

MRM4-2A1AHB

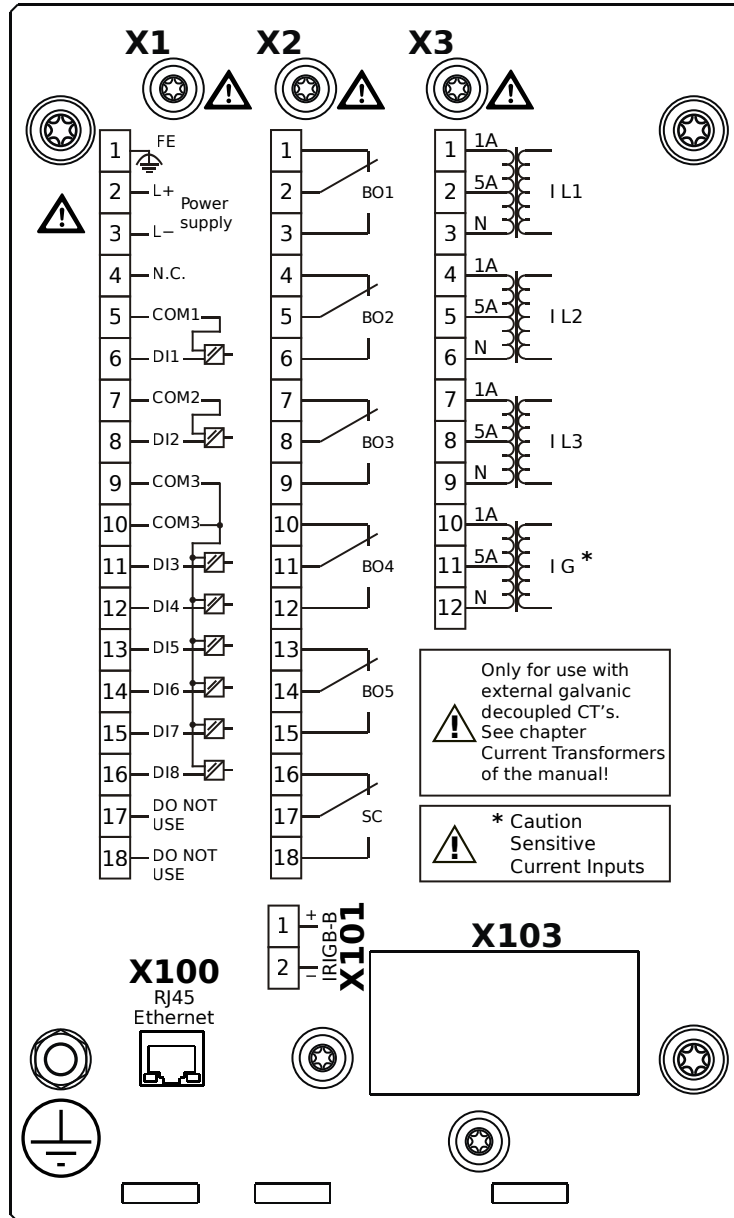

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs

X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

FX)

X101 – IRIG-B00X


MRM4-2A1AIA

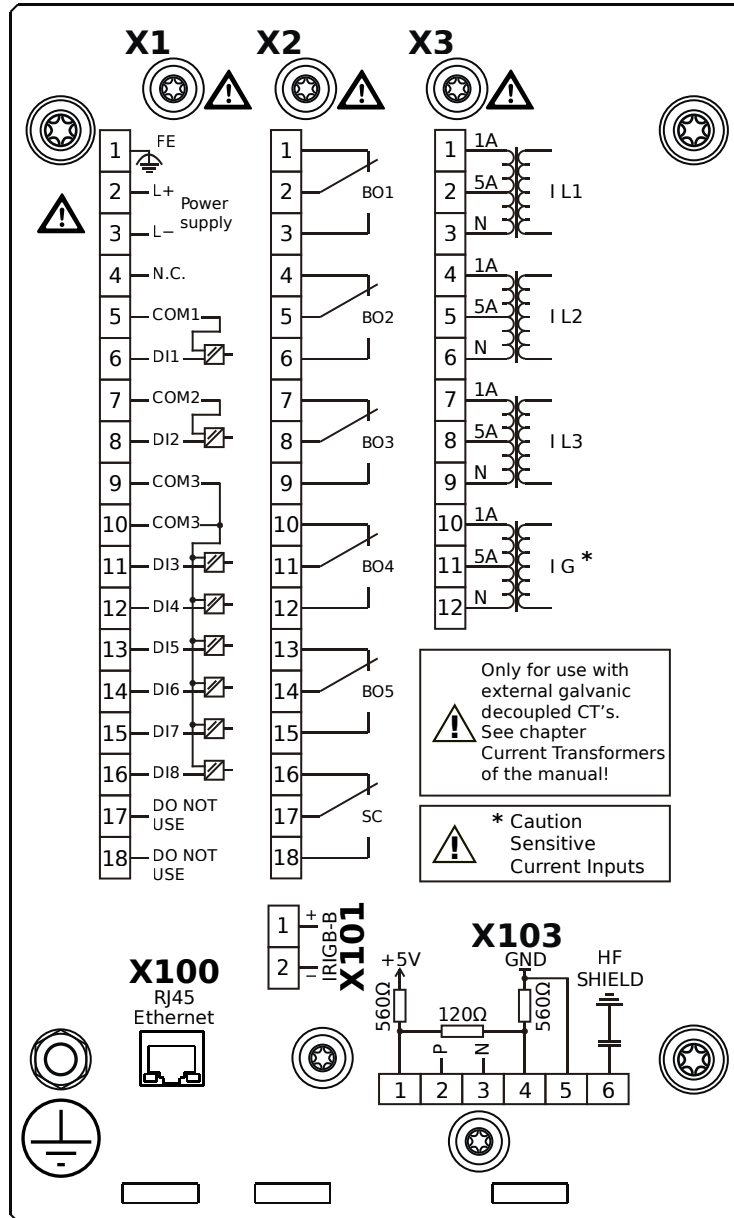

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2A1AIB

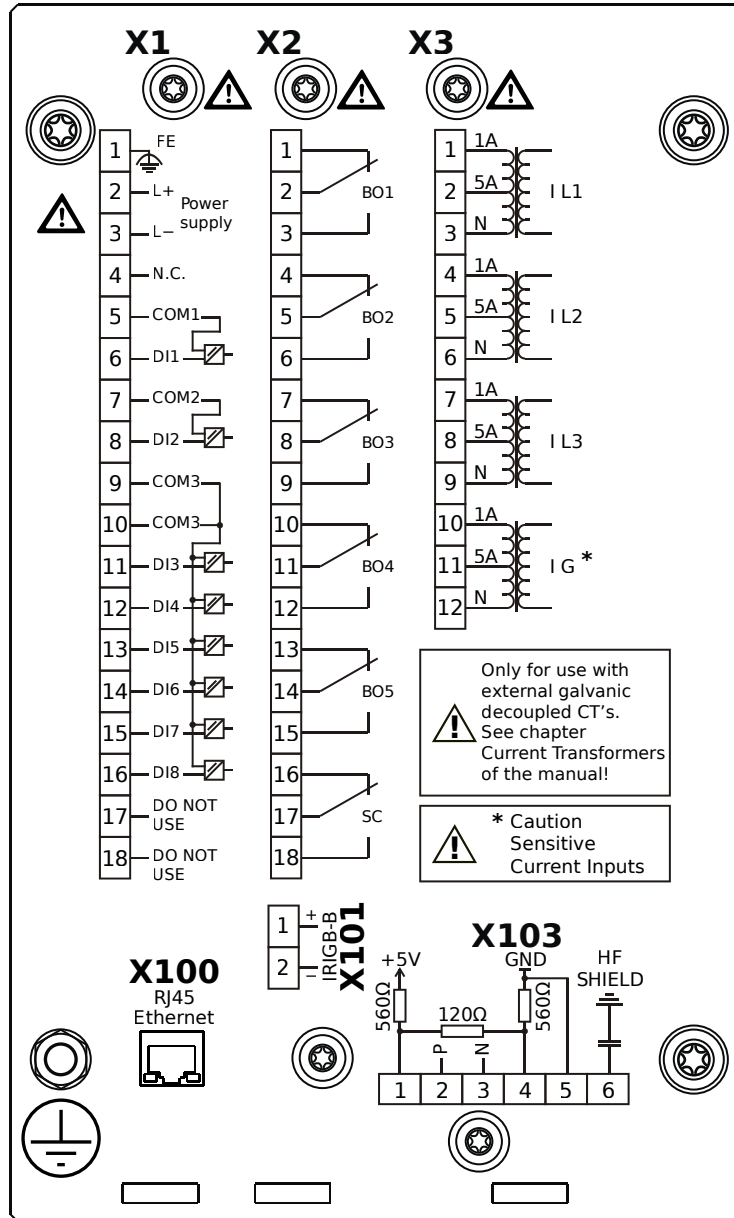


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals


MRM4-2A1AKA

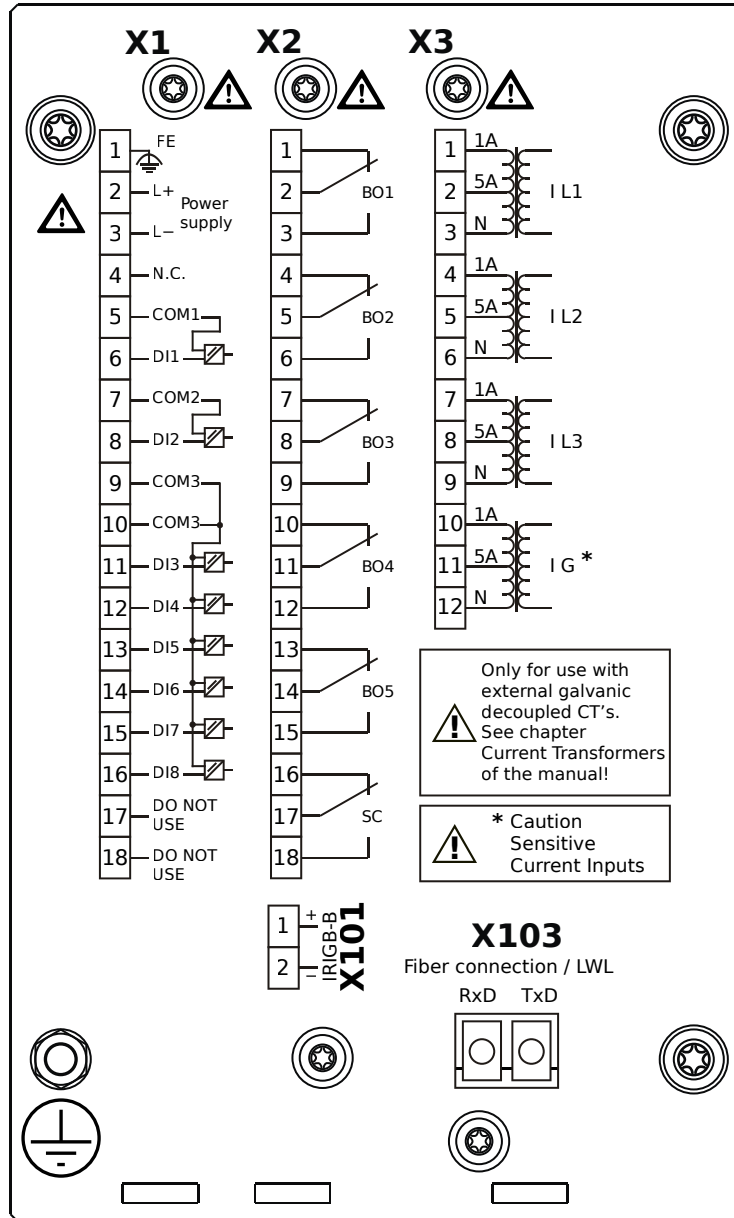

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2A1AKB

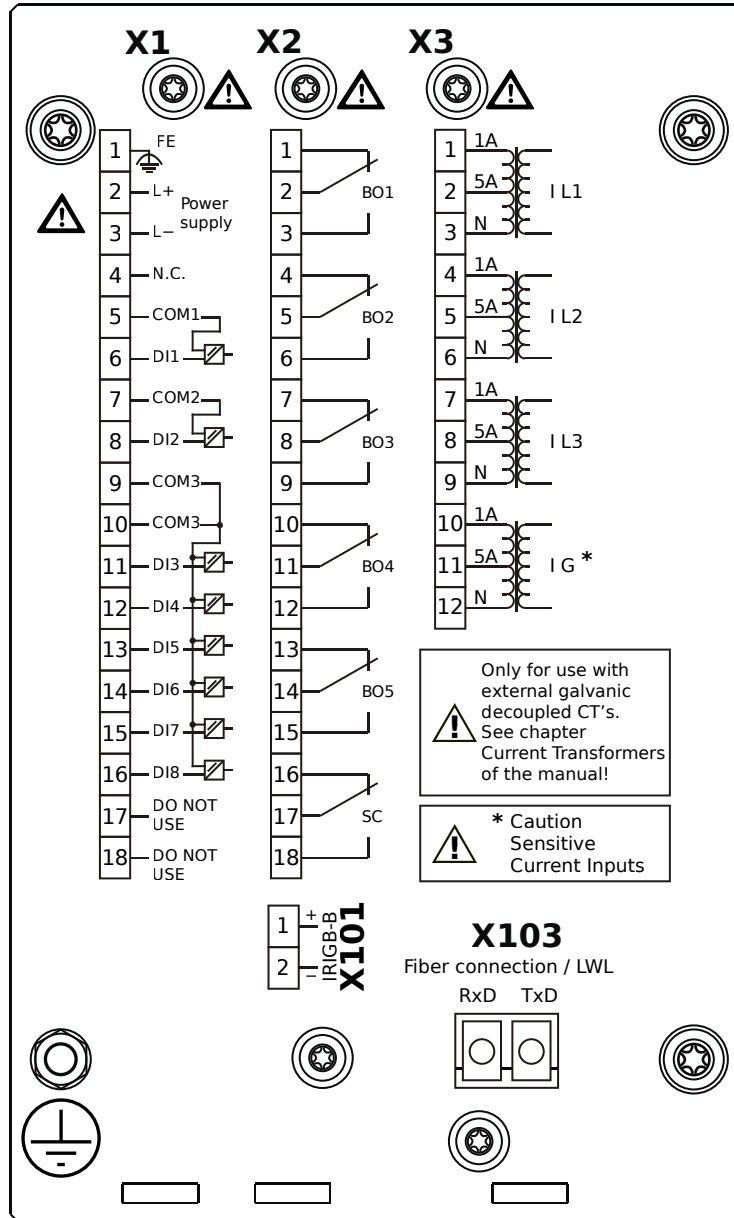


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector


MRM4-2A1ALA

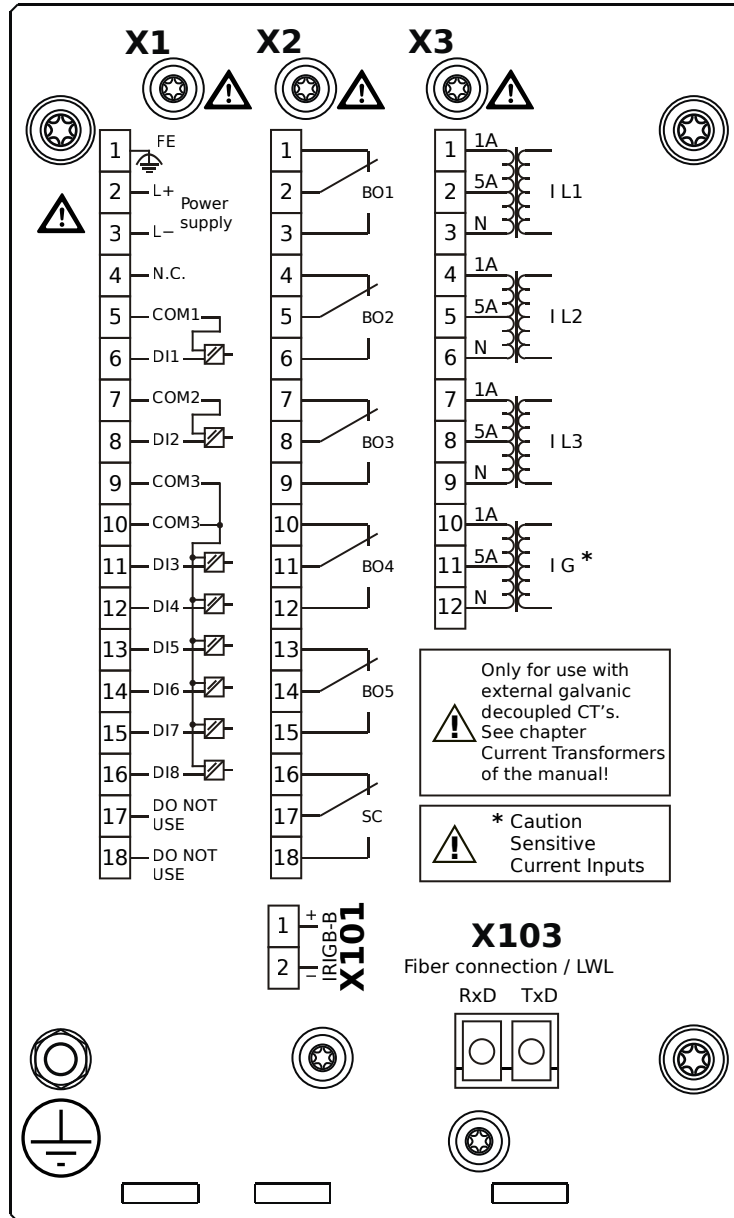

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2A1ALB

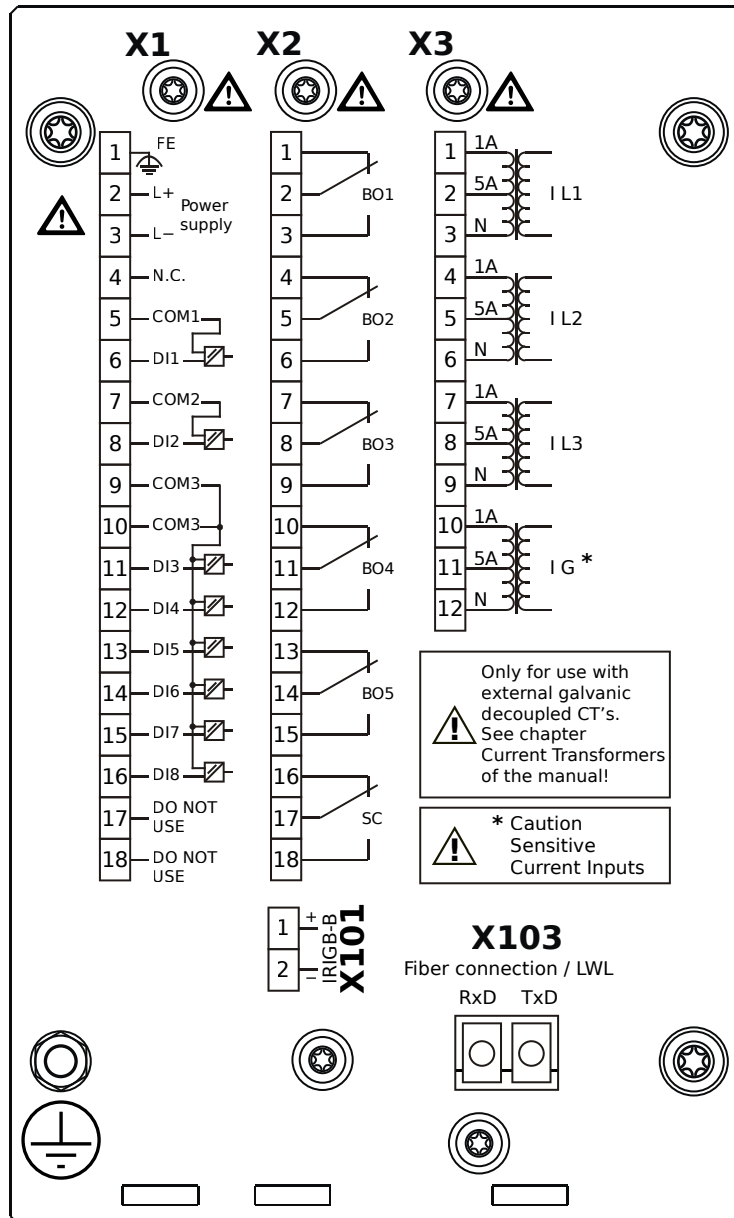


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector


MRM4-2A1AOA

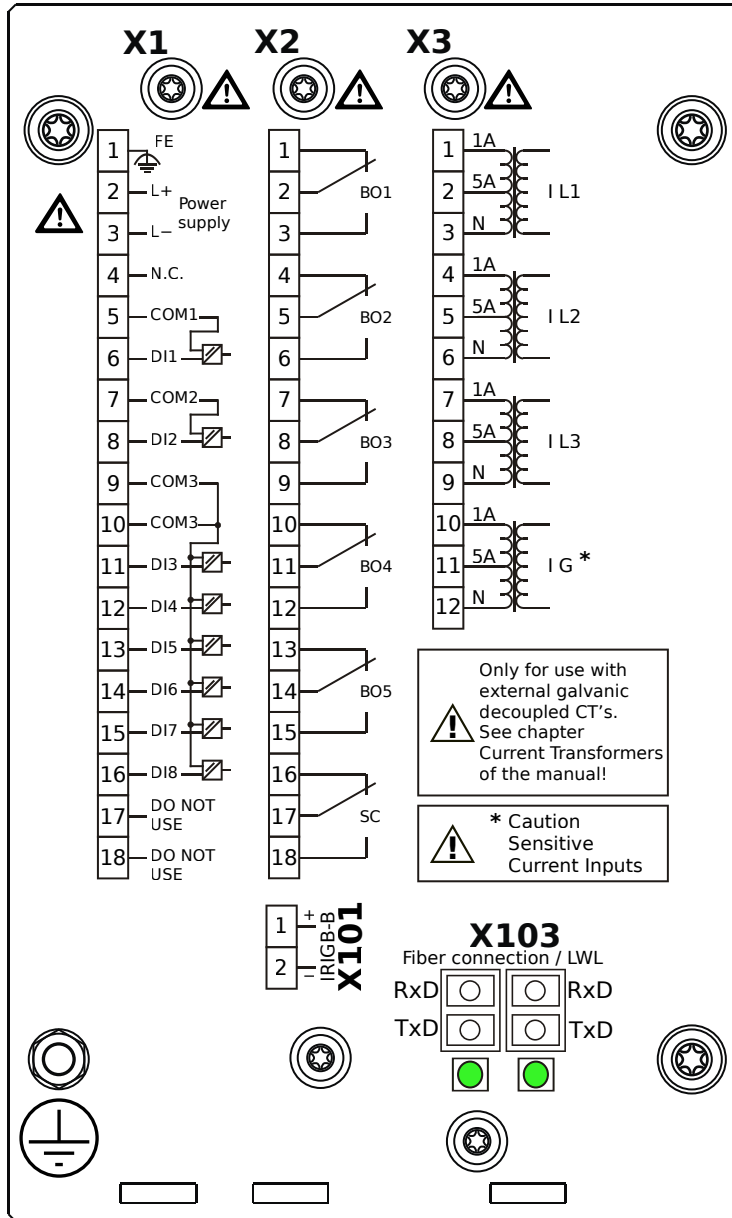

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A1AOB

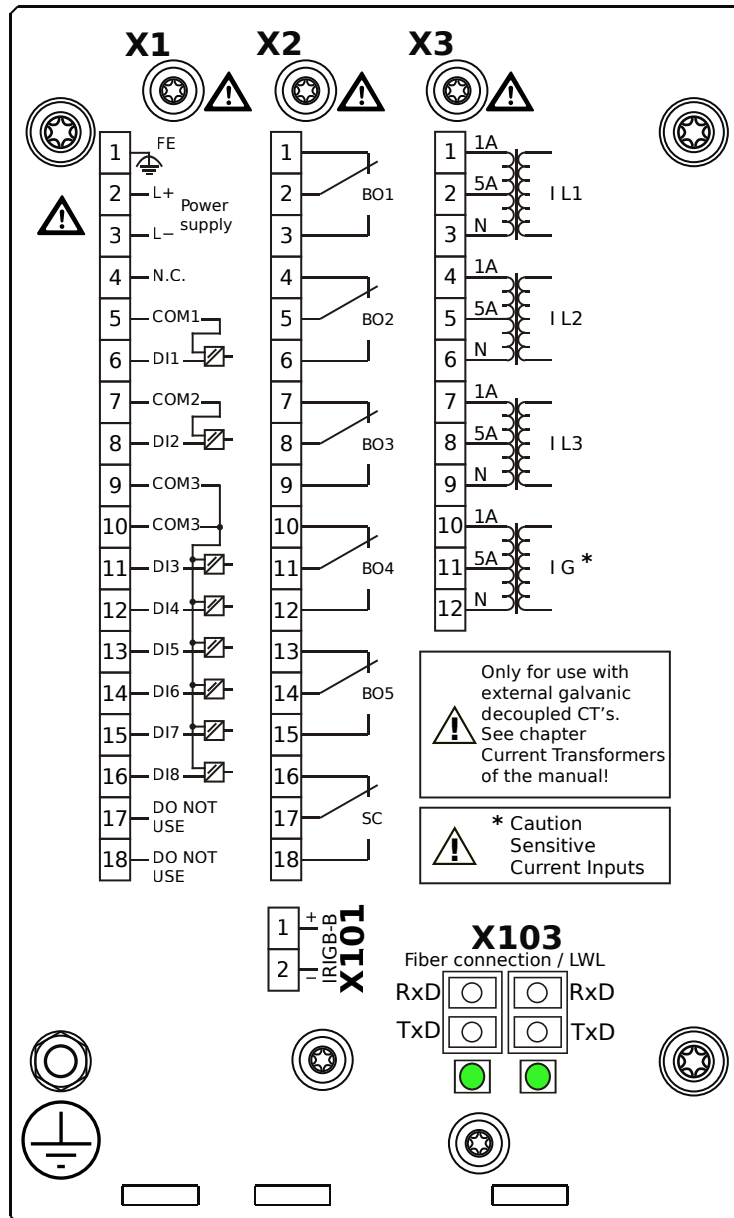


Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector


MRM4-2A1APA

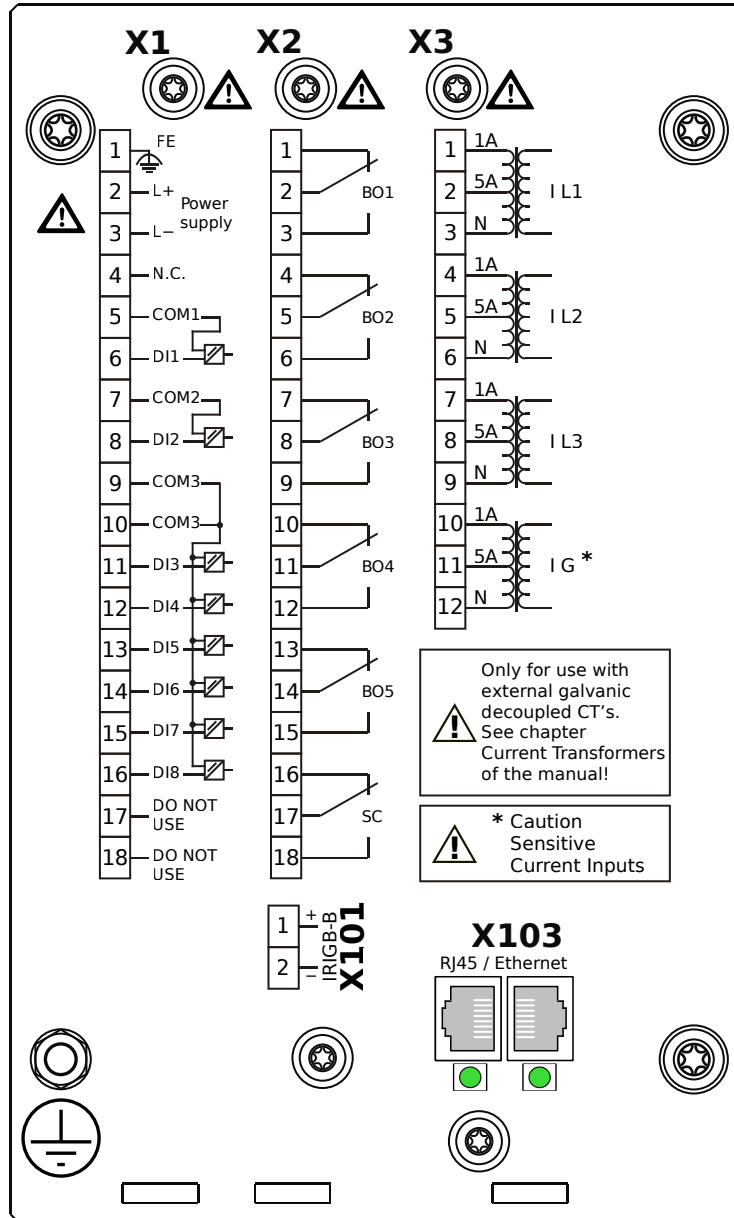

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2A1APB

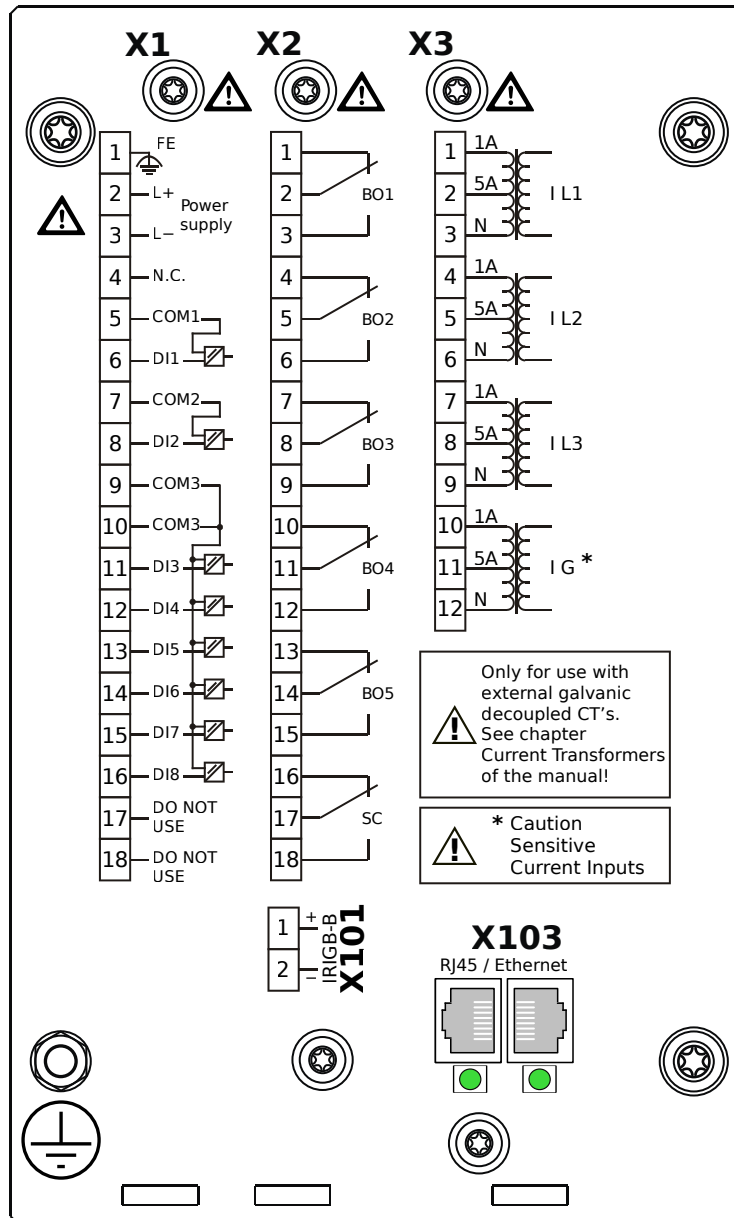

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – IRIG-B00X

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)


MRM4-2A1AQA

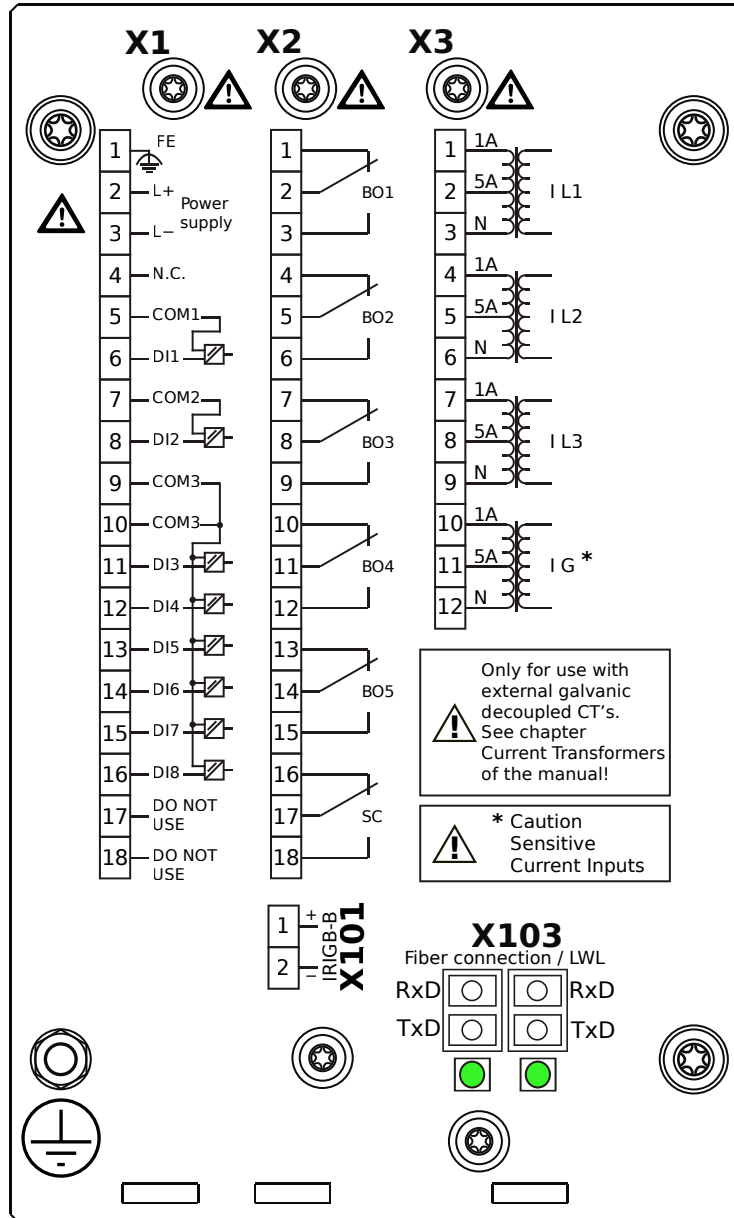

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A1AQB

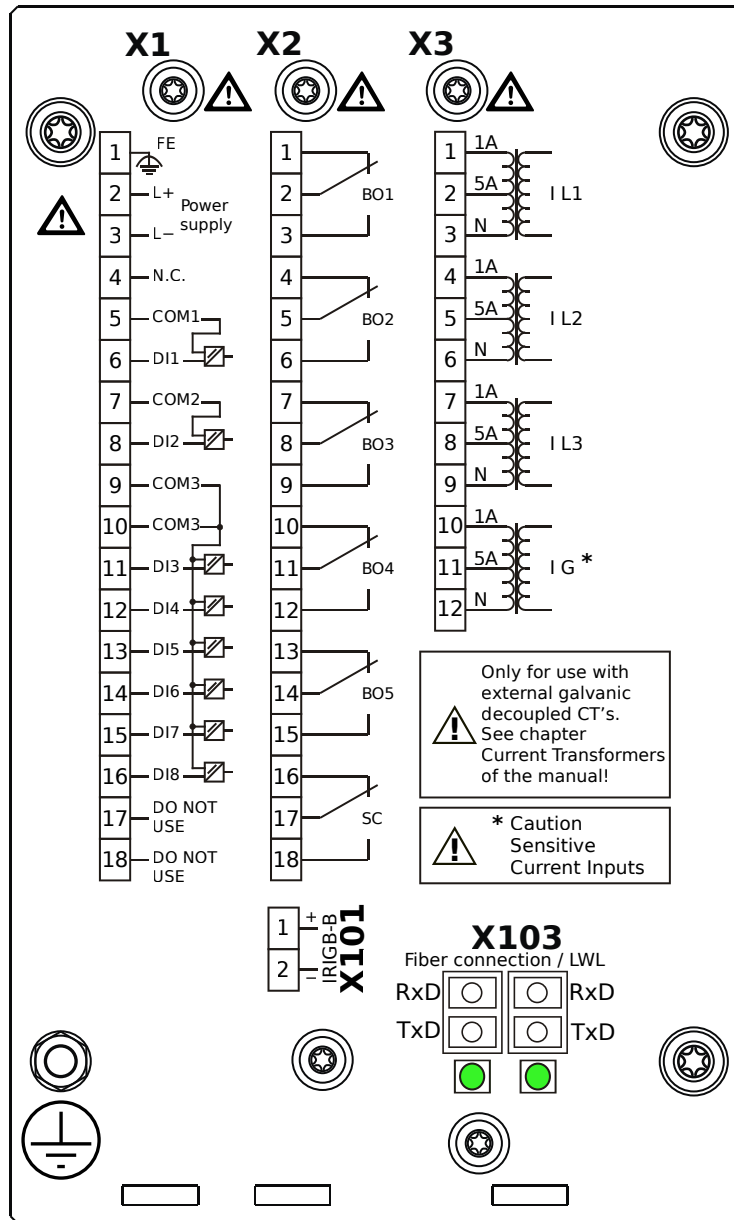

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A1ARA

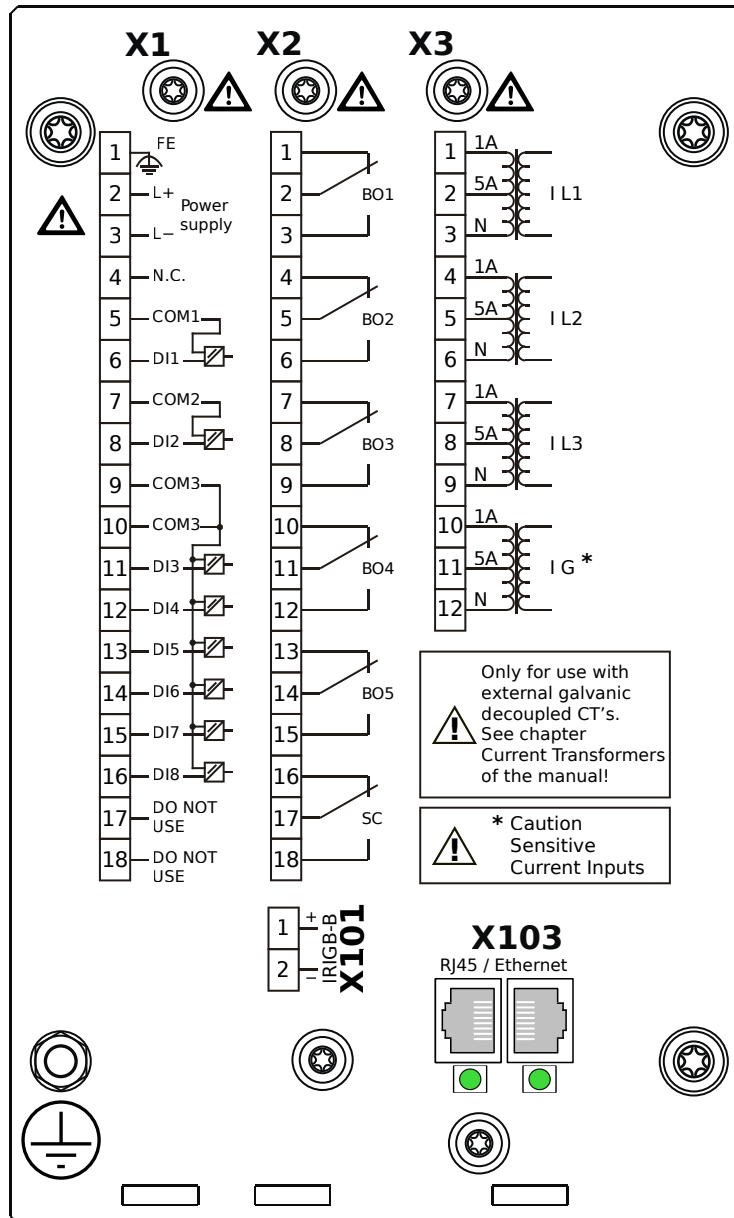

Housing B1, small display, door mounting

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2A1ARB

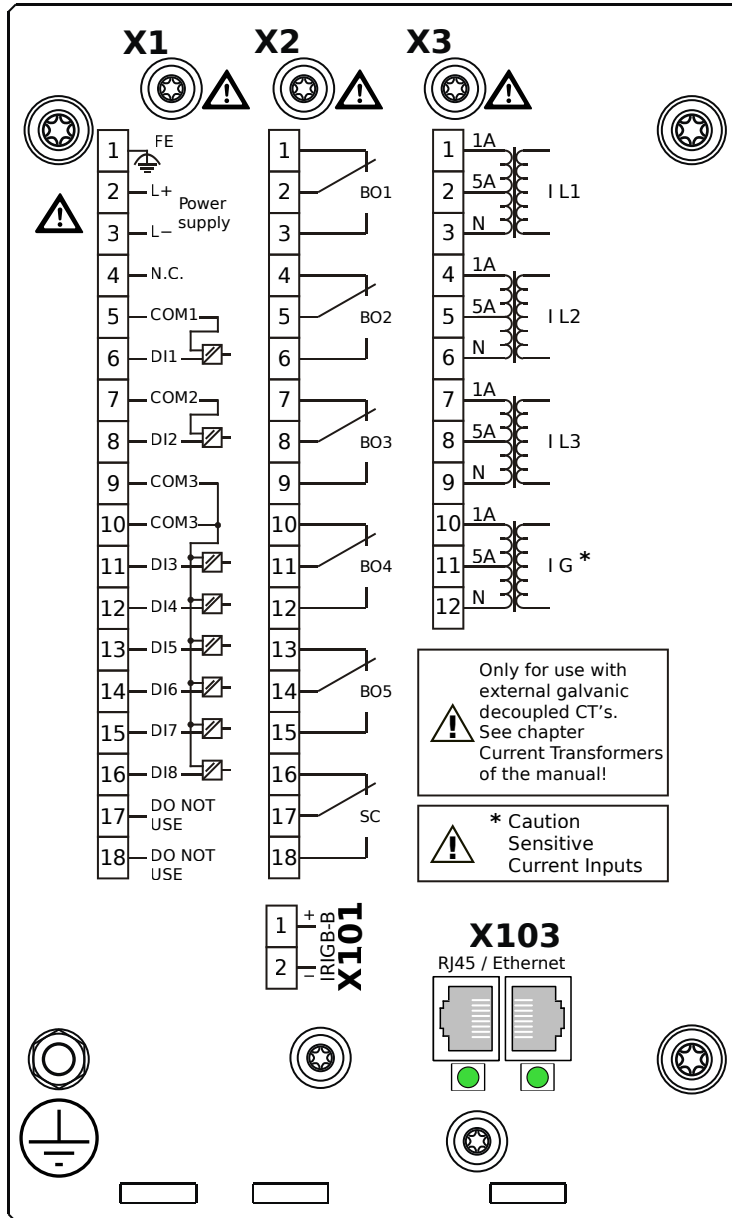

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)


MRM4-2A1ATA

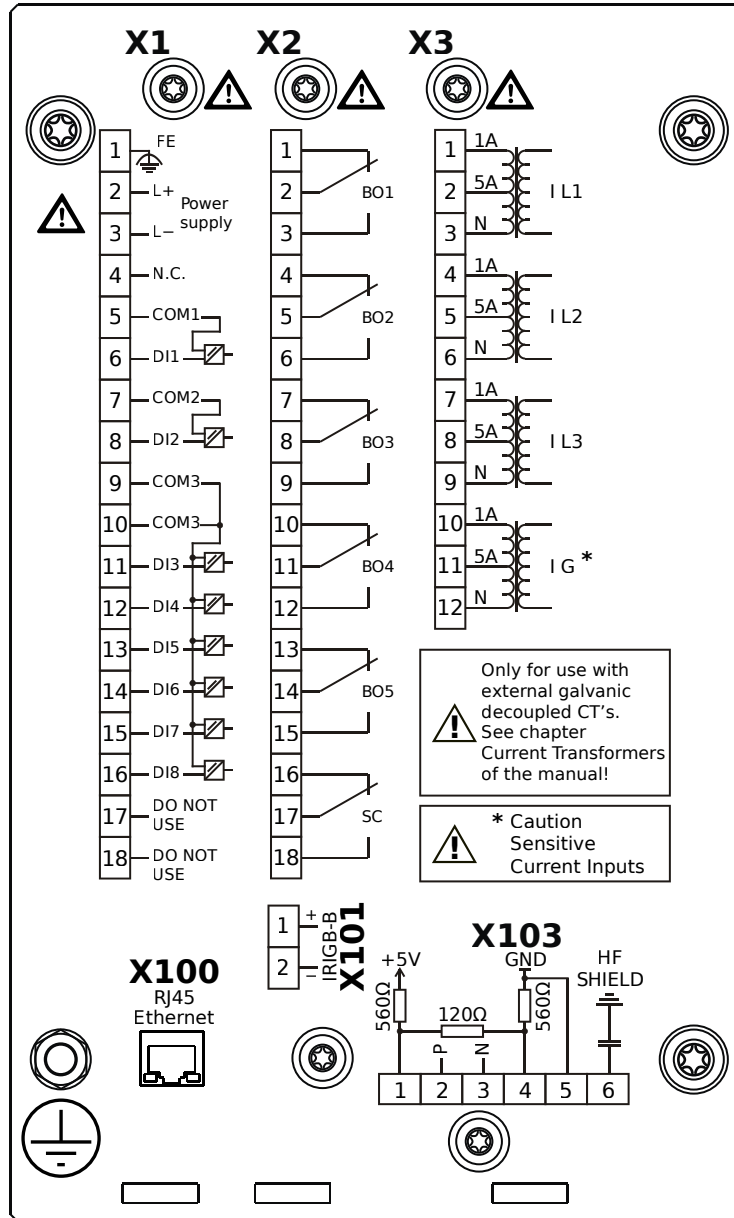

Housing B1, small display, door mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2A1ATB

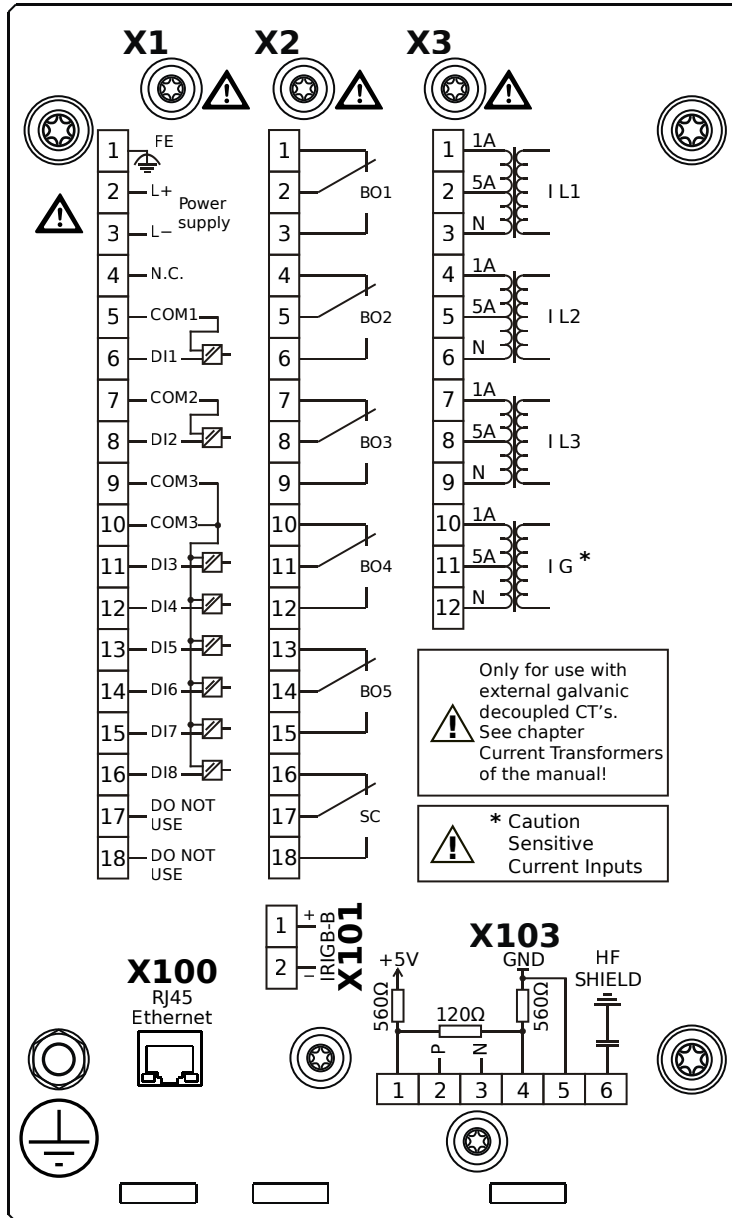

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs

X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring


X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

FX)

X101 – IRIG-B00X

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals


MRM4-2A1BAA

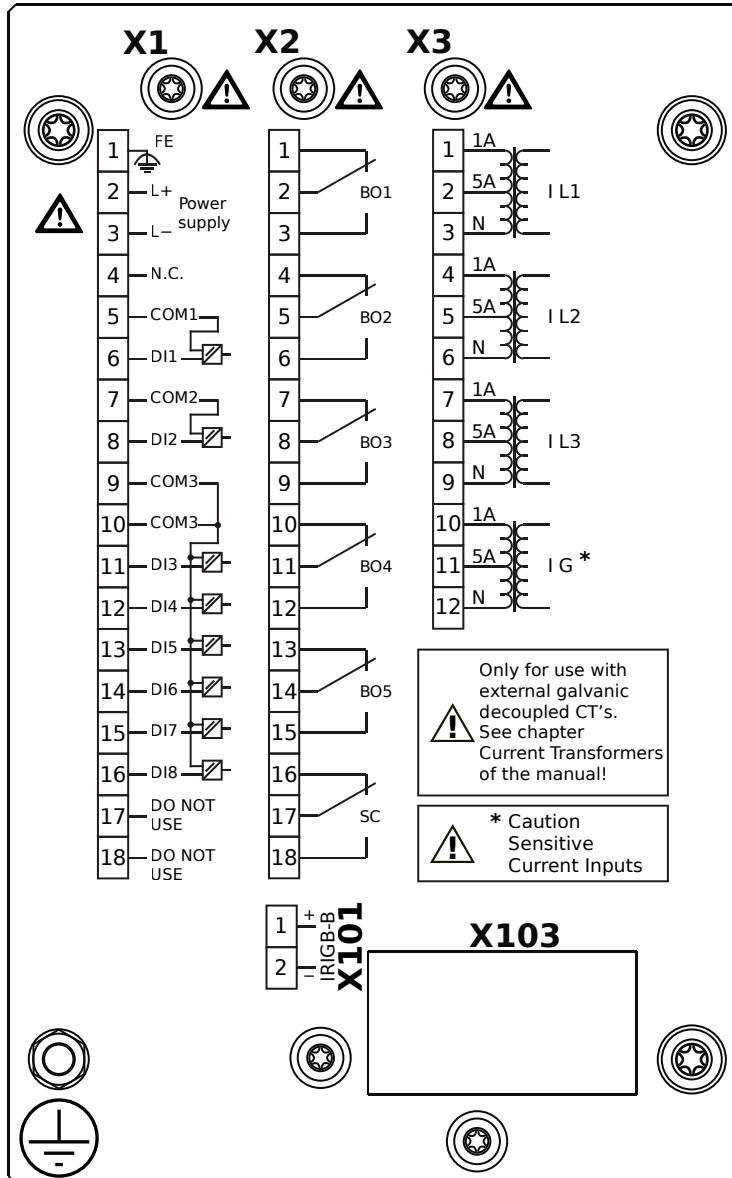

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X

MRM4-2A1BAB

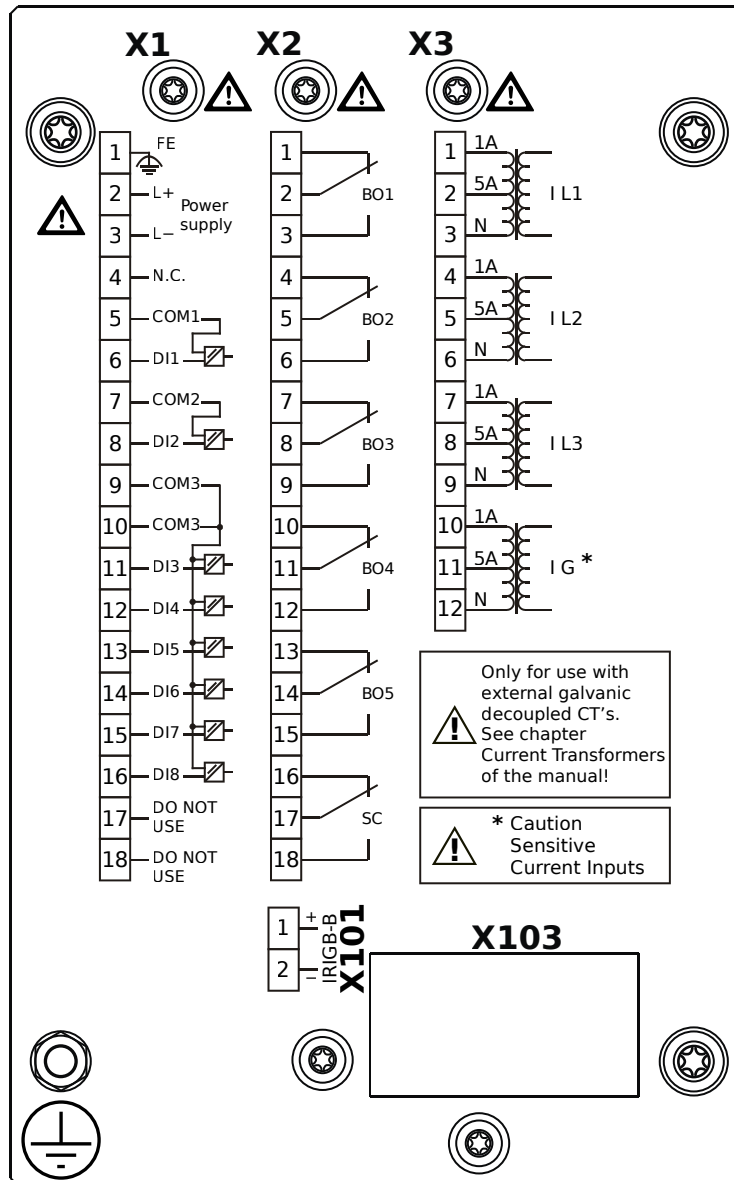


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X


MRM4-2A1BBA

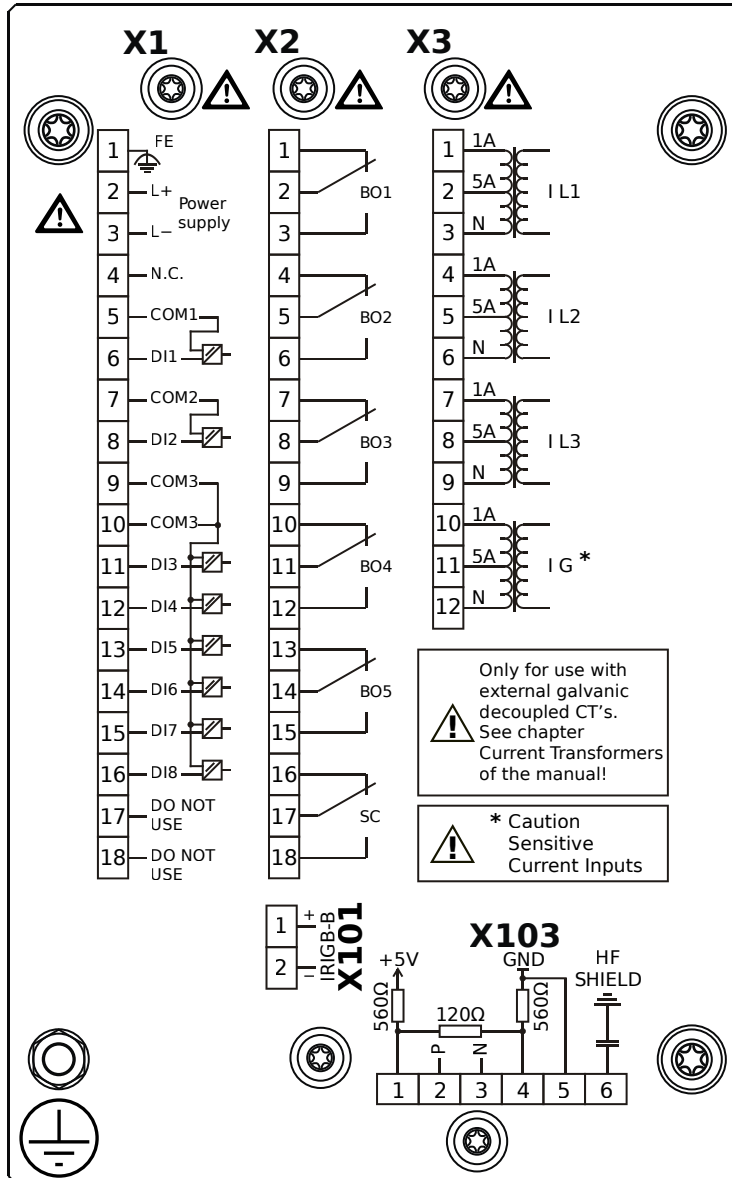

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2A1BBB

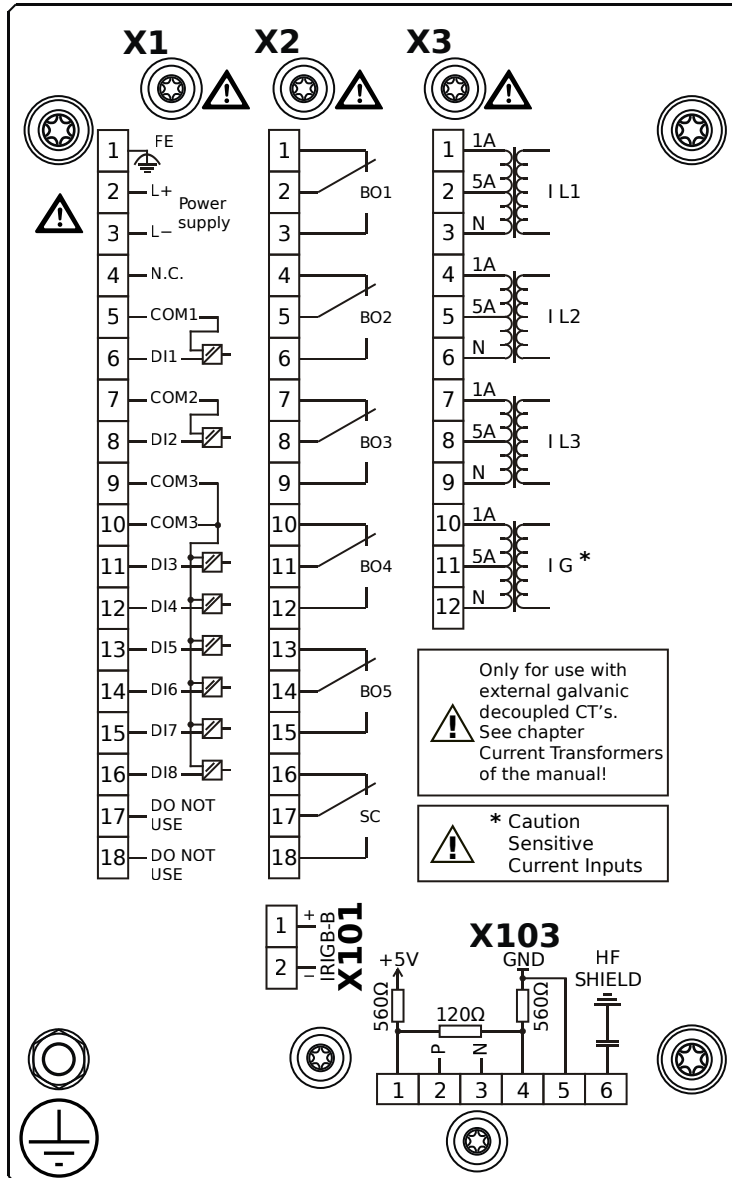


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals


MRM4-2A1BCA

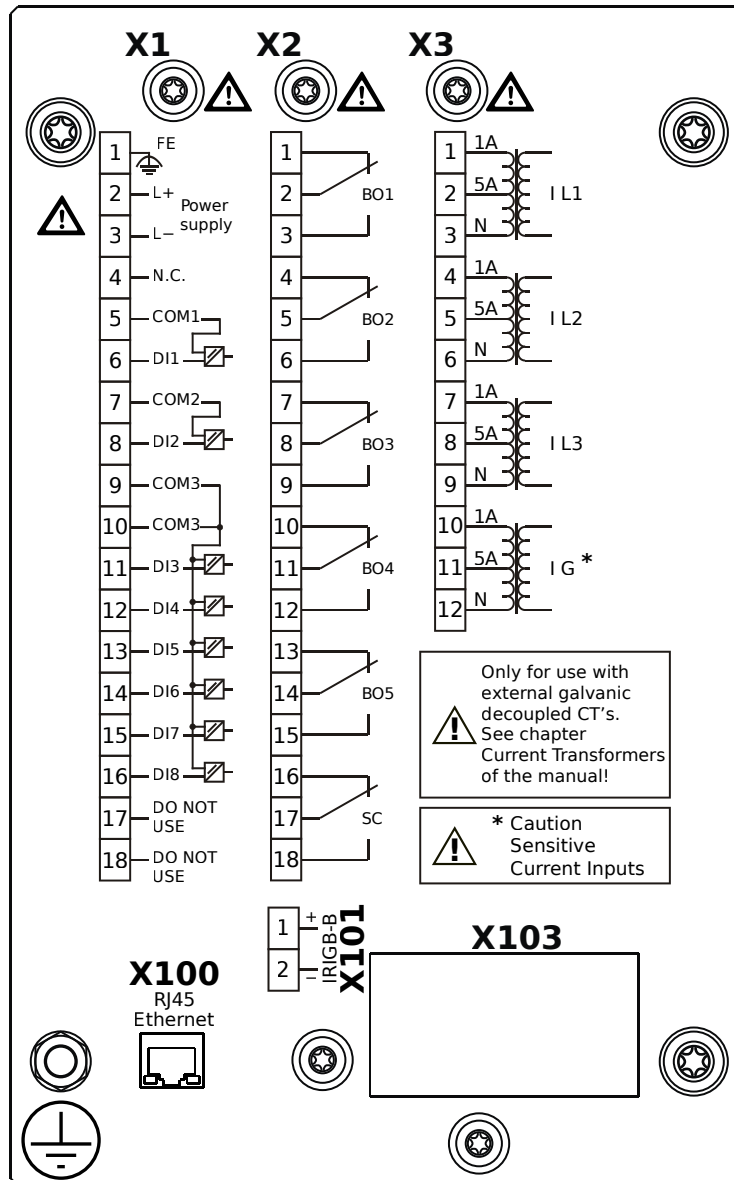

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X

MRM4-2A1BCB

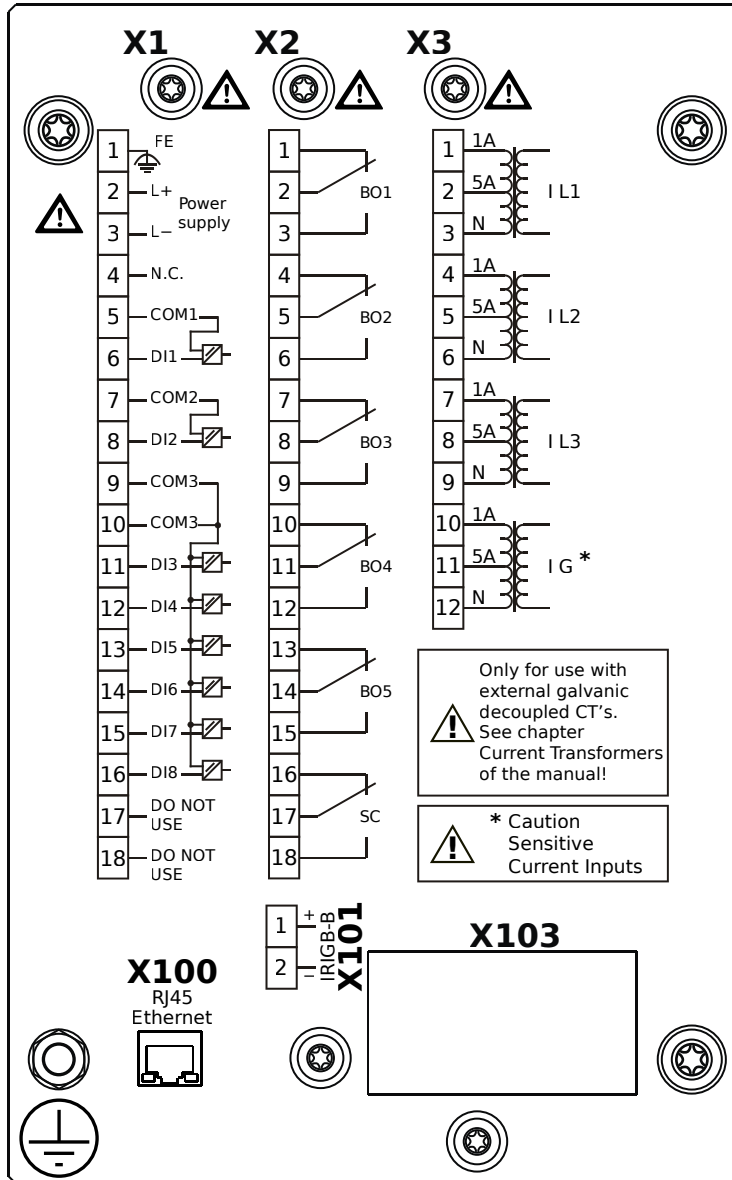


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X


MRM4-2A1BDA

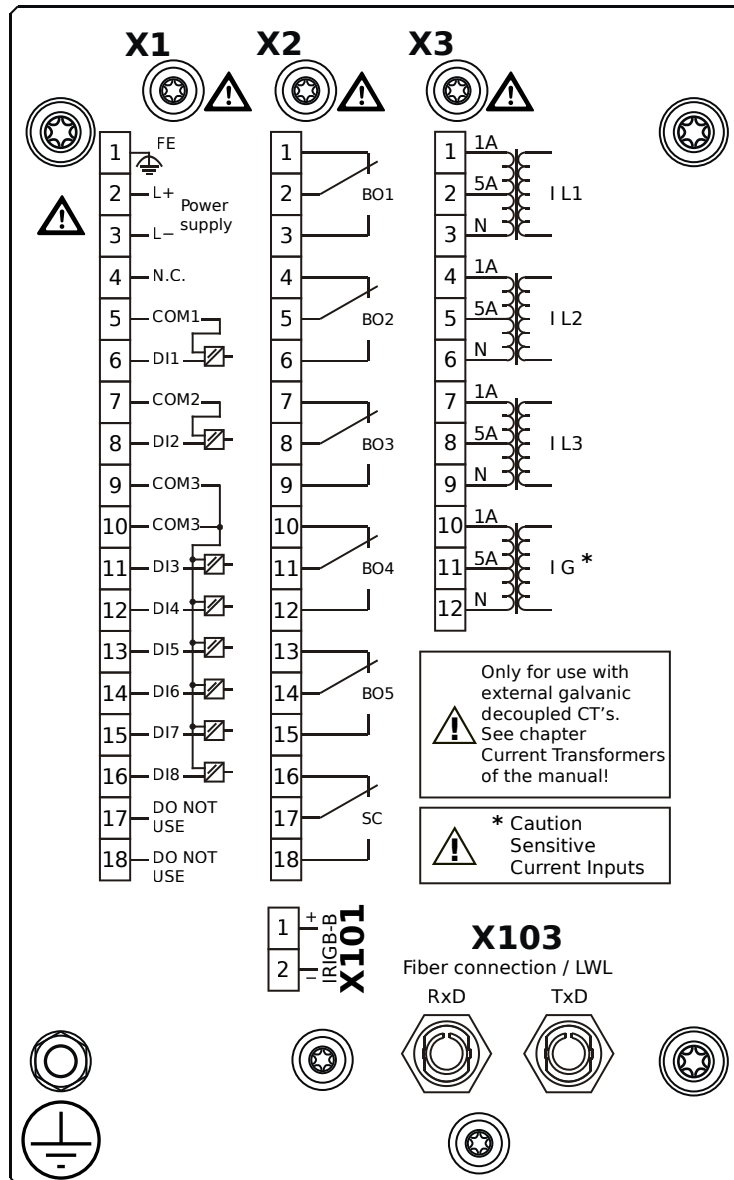

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2A1BDB

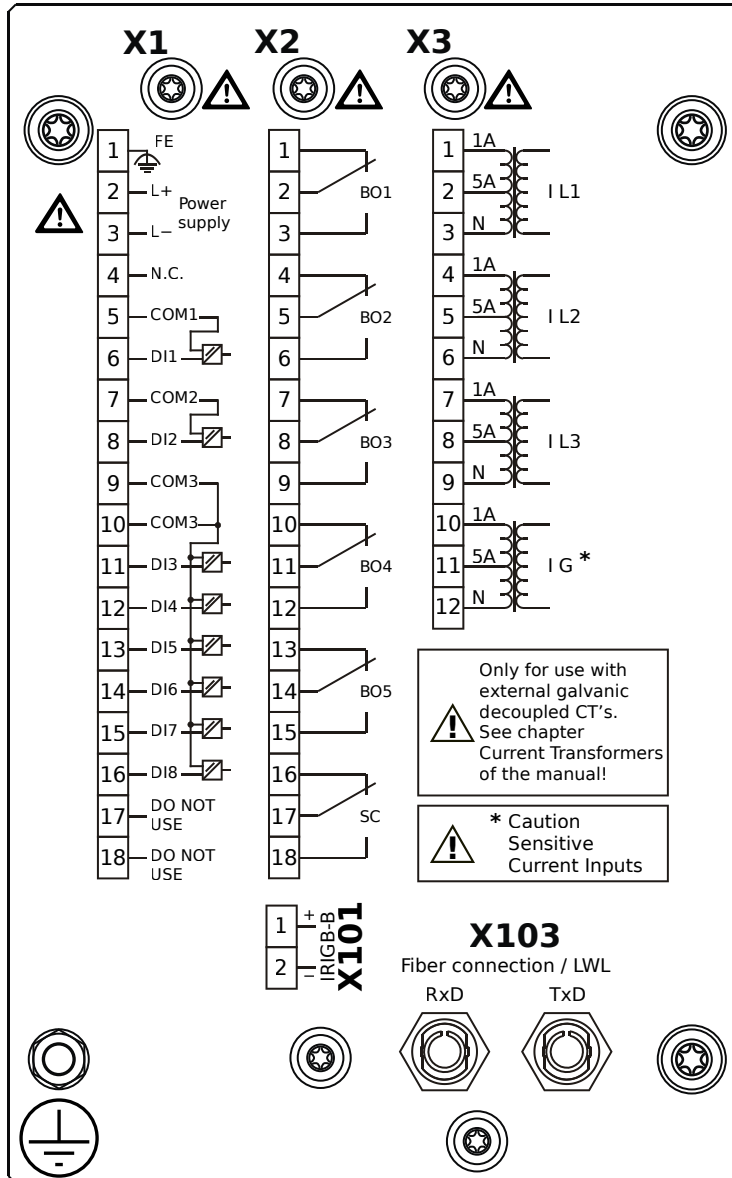


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Profibus-DP, Fiber optics interface, ST Connector


MRM4-2A1BEA

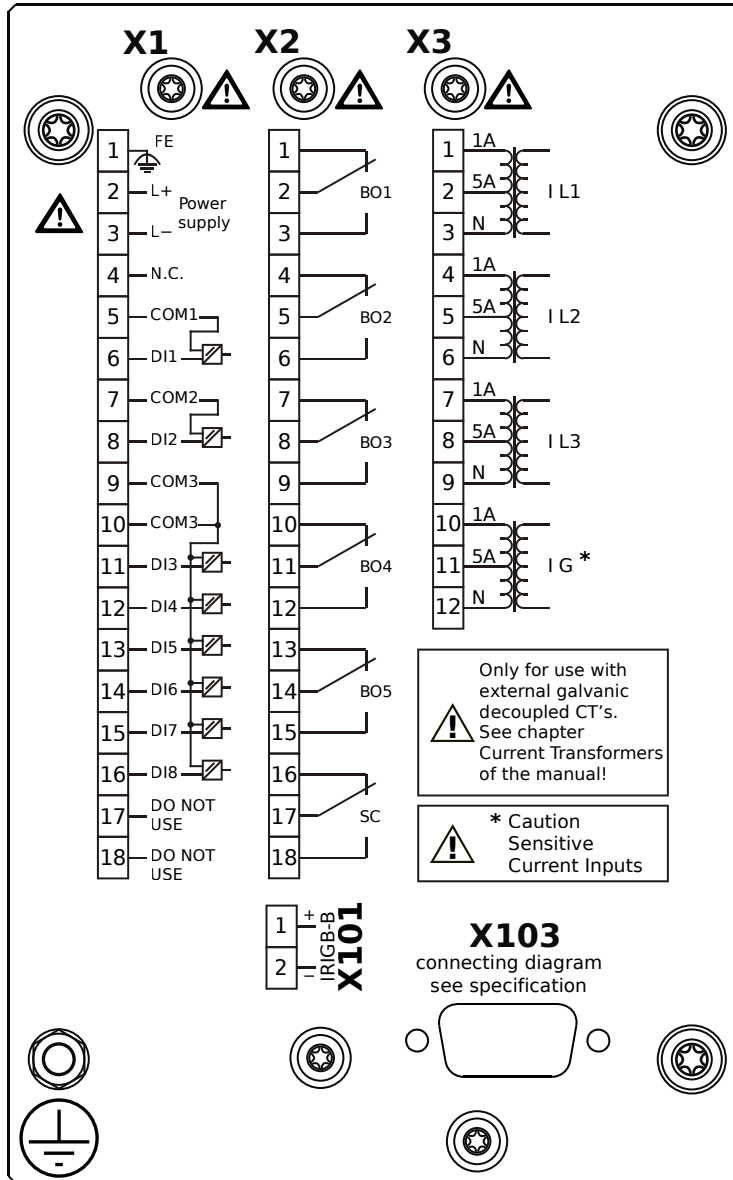

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Profibus-DP, RS485, D-SUB

MRM4-2A1BEB

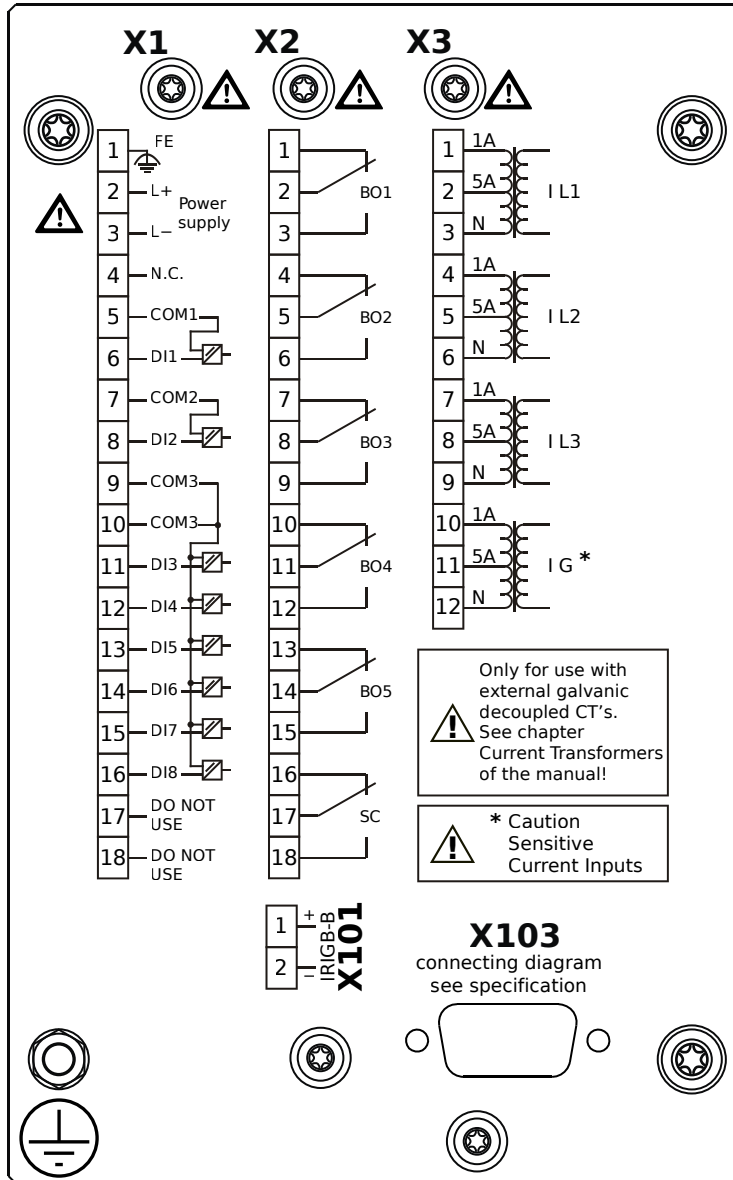


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Profibus-DP, RS485, D-SUB


MRM4-2A1BFA

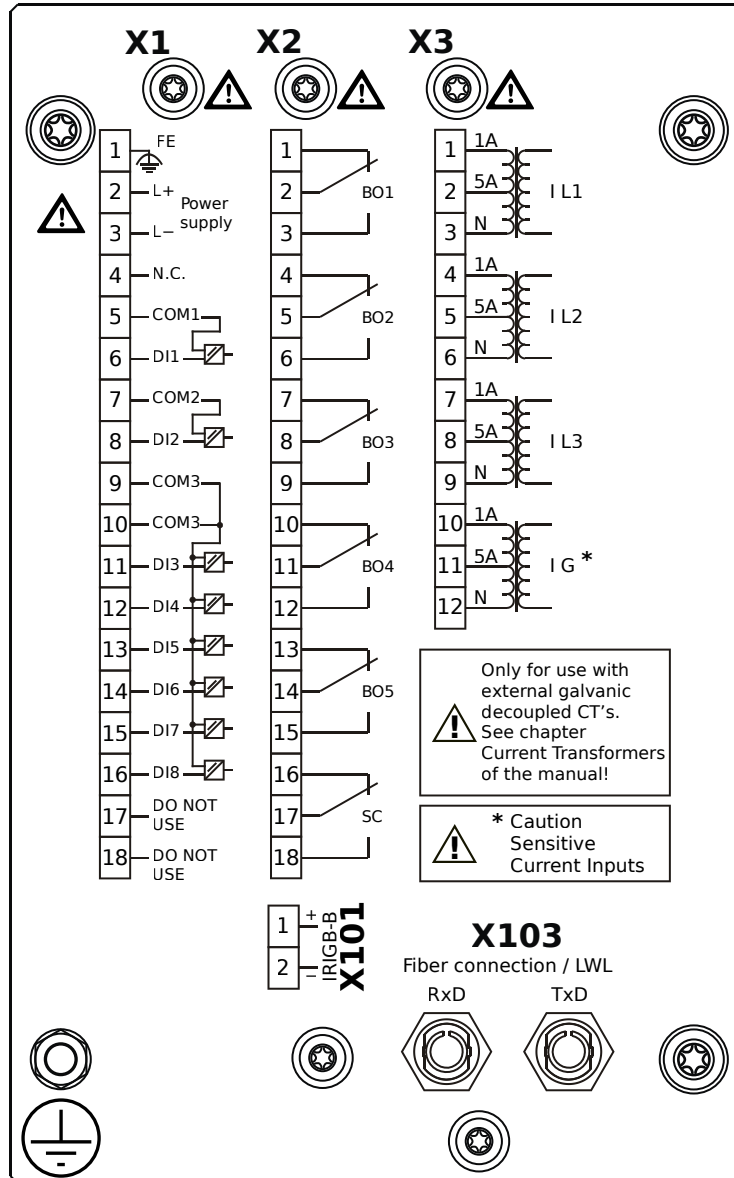

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2A1BFB

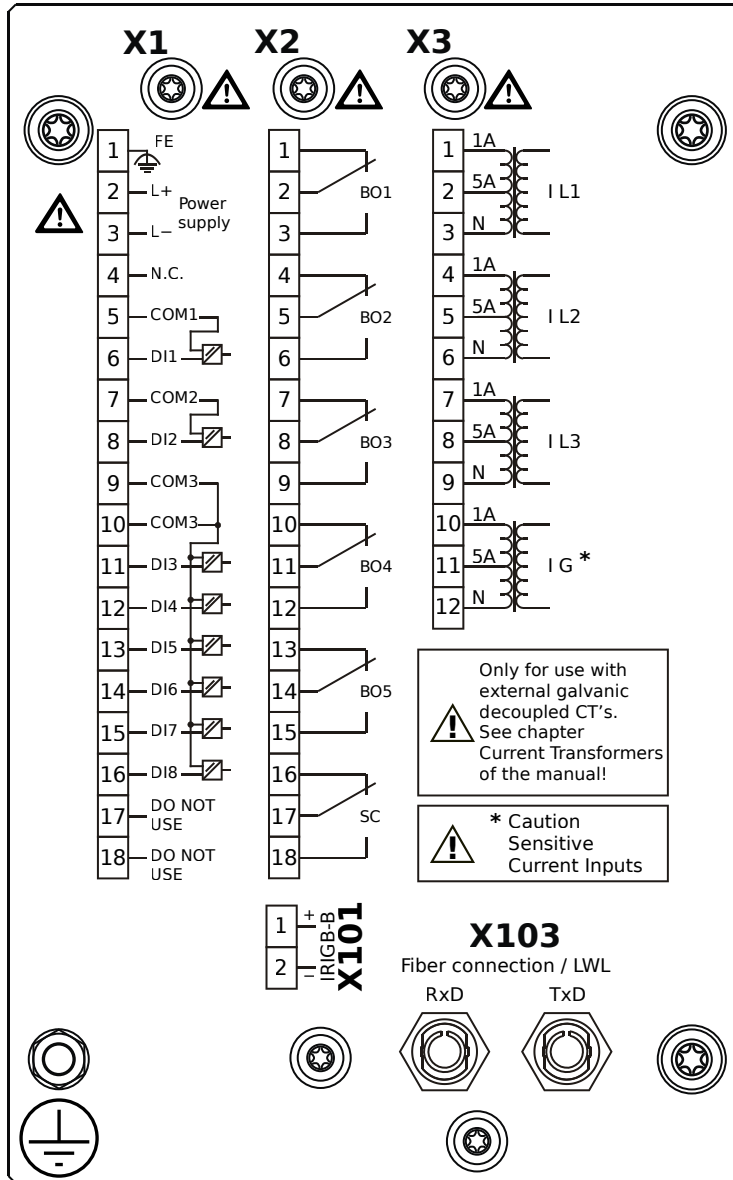

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – IRIG-B00X

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector


MRM4-2A1BGA

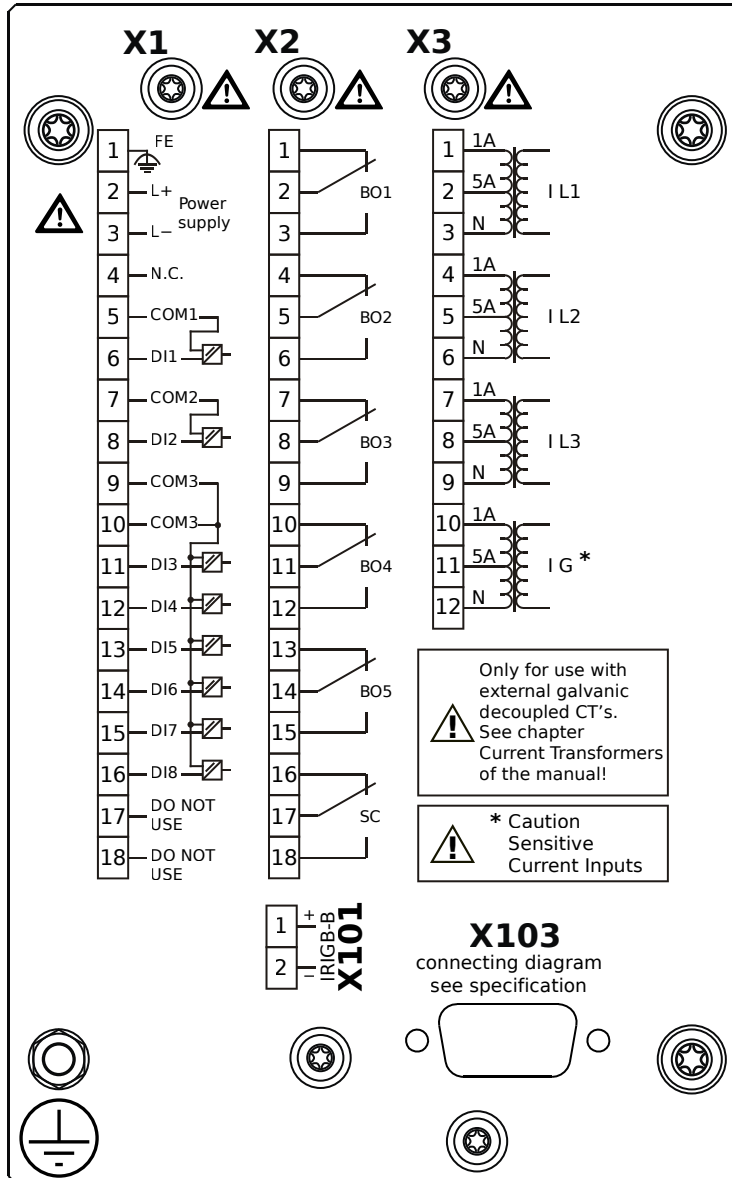

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2A1BGB

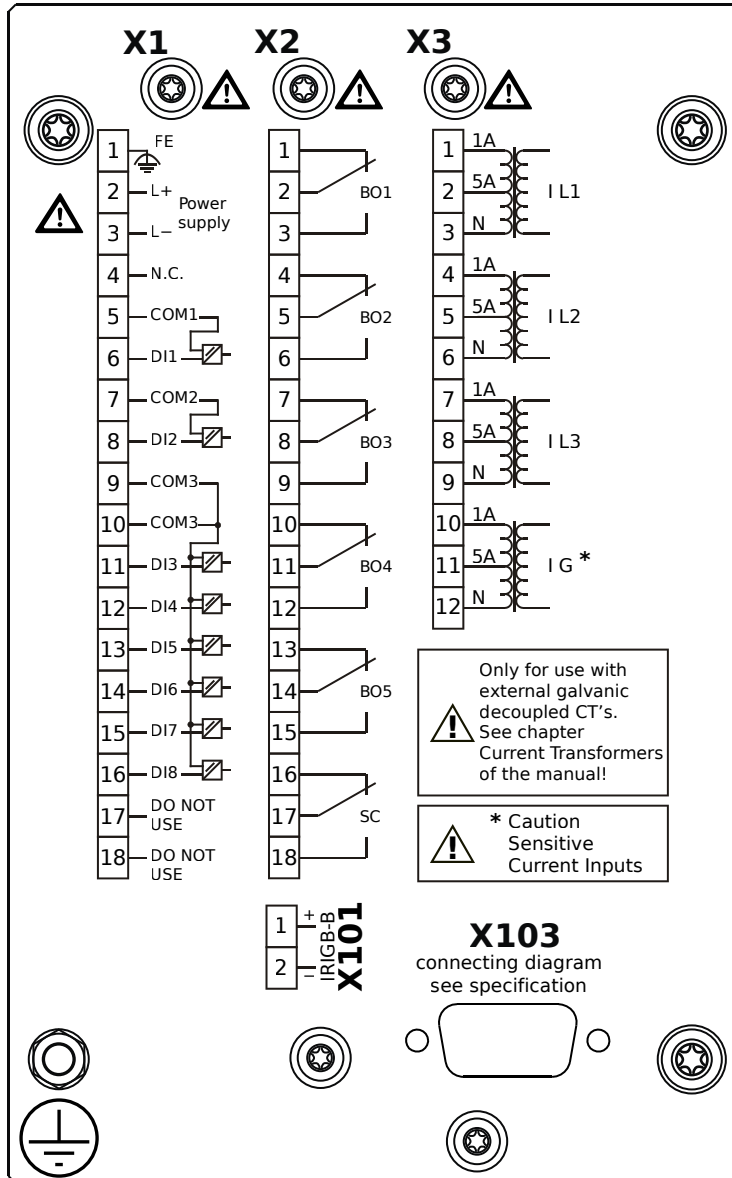


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB


MRM4-2A1BHA

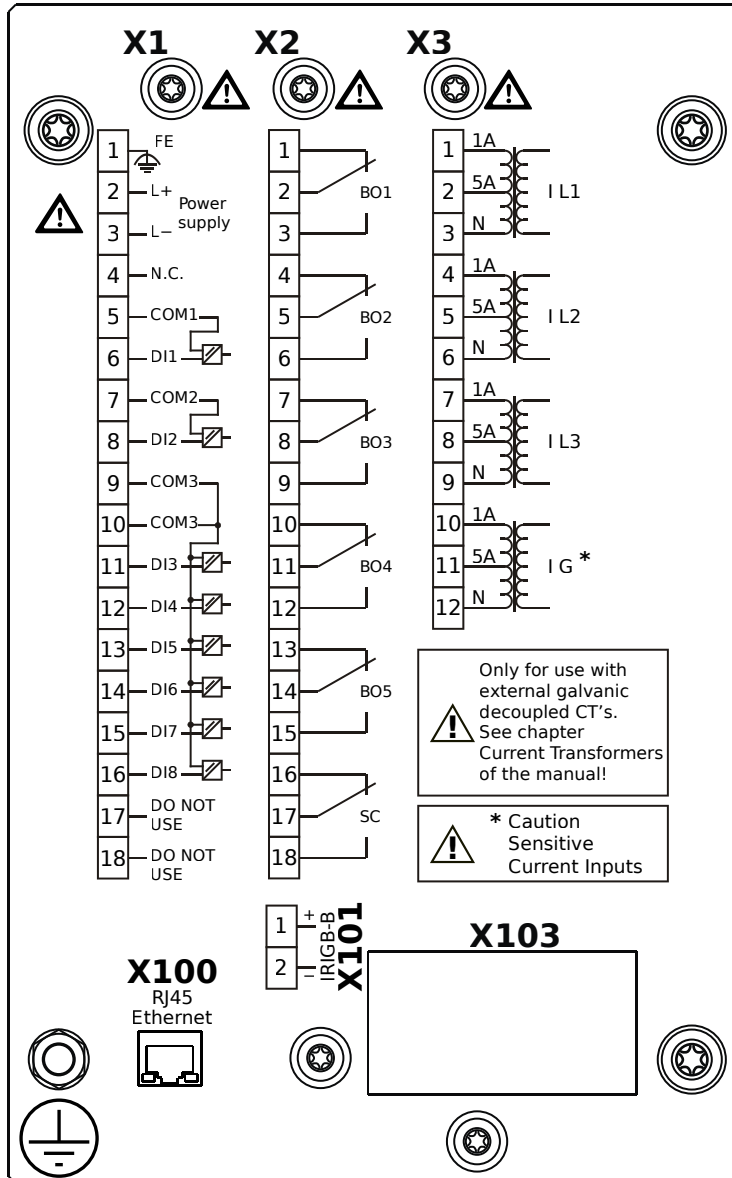

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X

MRM4-2A1BHB

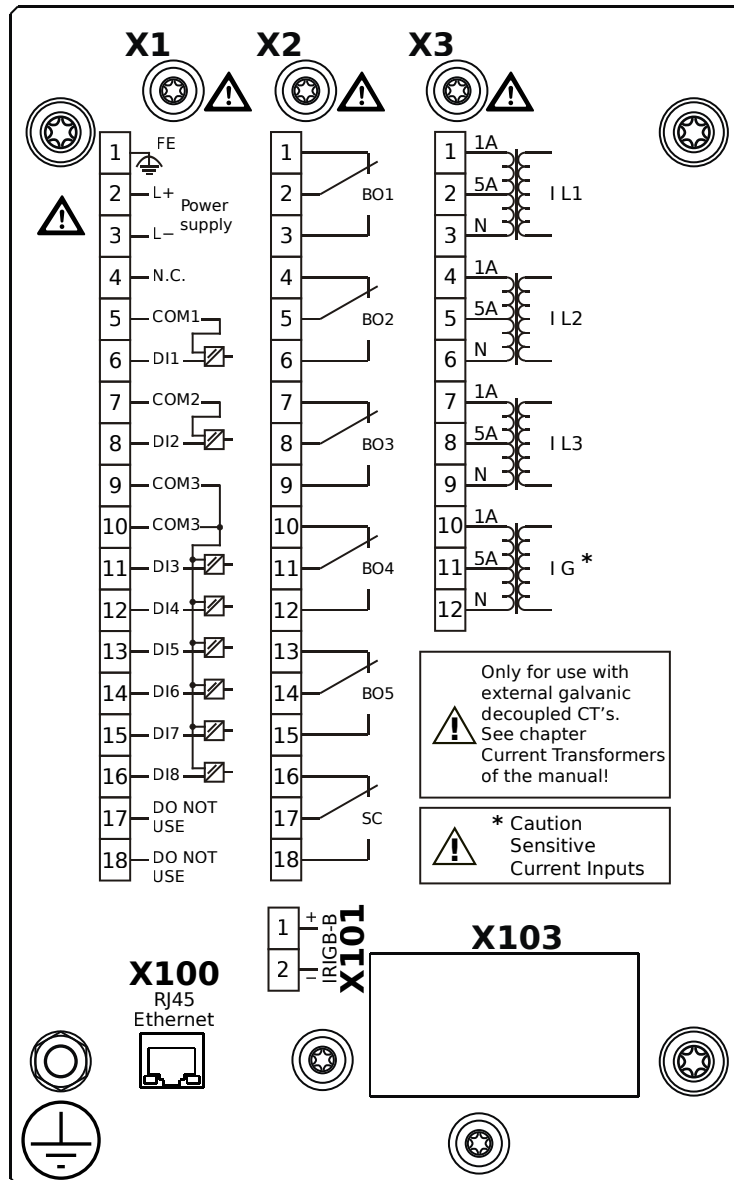

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs

X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

FX)

X101 – IRIG-B00X


MRM4-2A1BIA

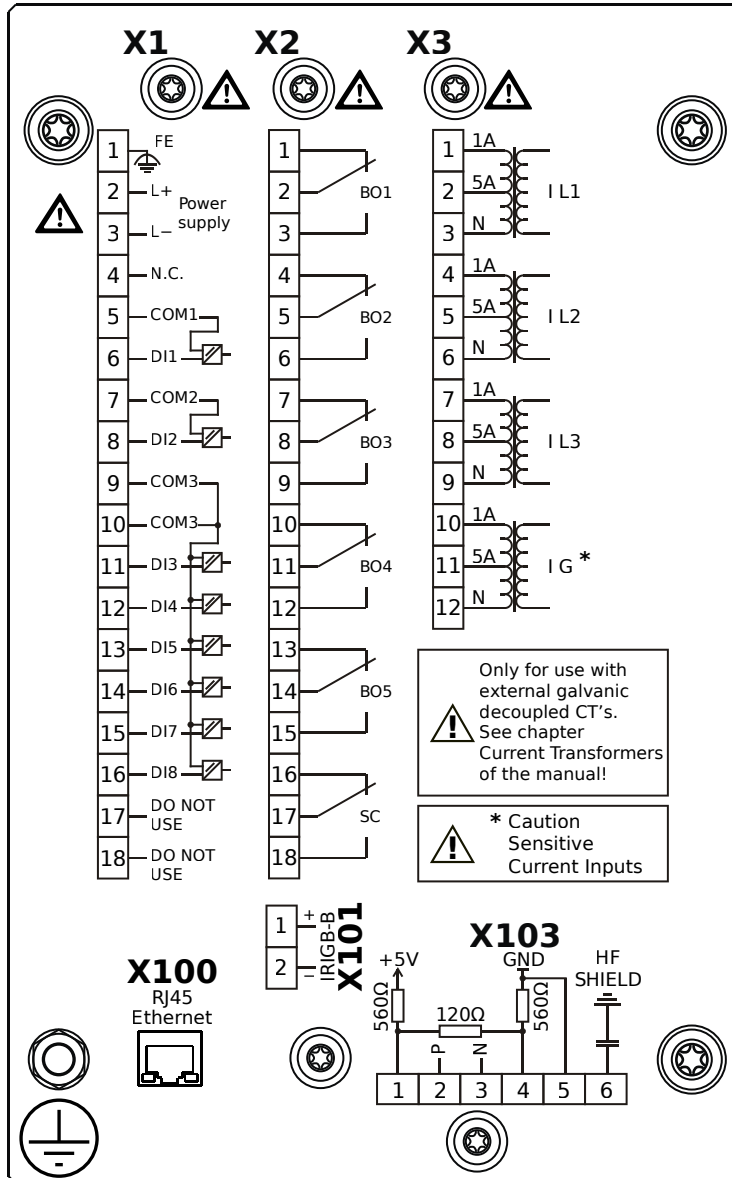

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2A1BIB

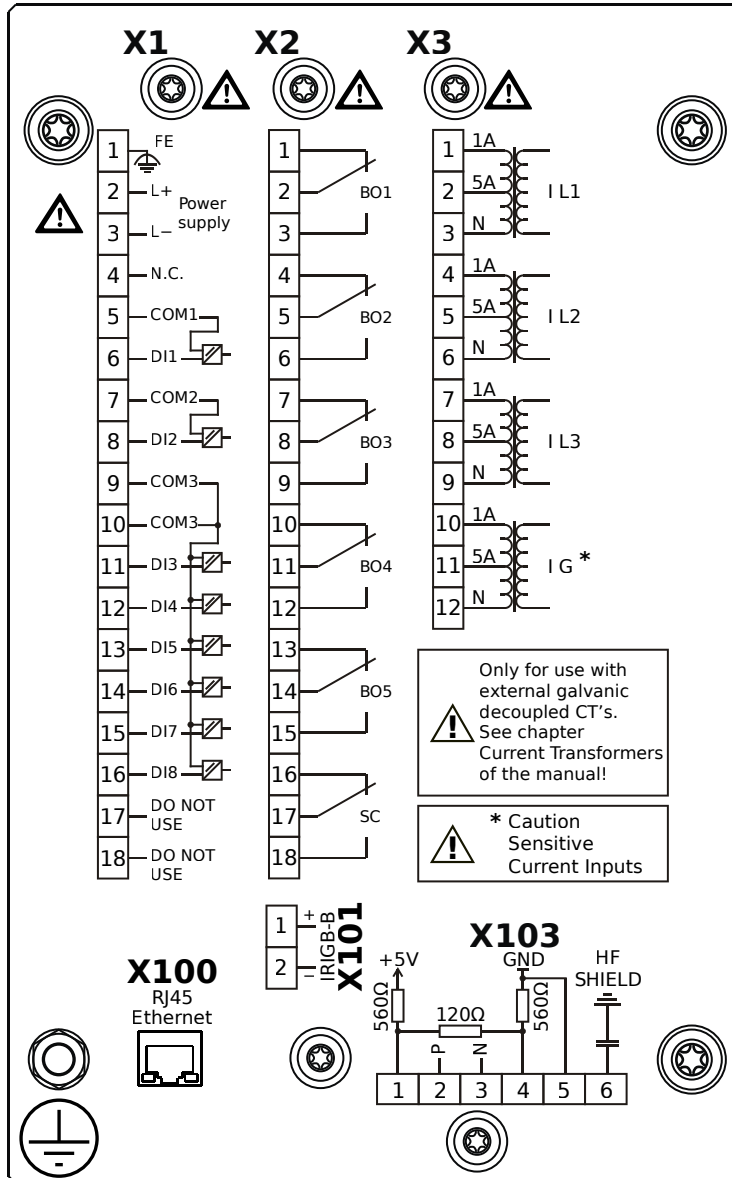


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals


MRM4-2A1BKA

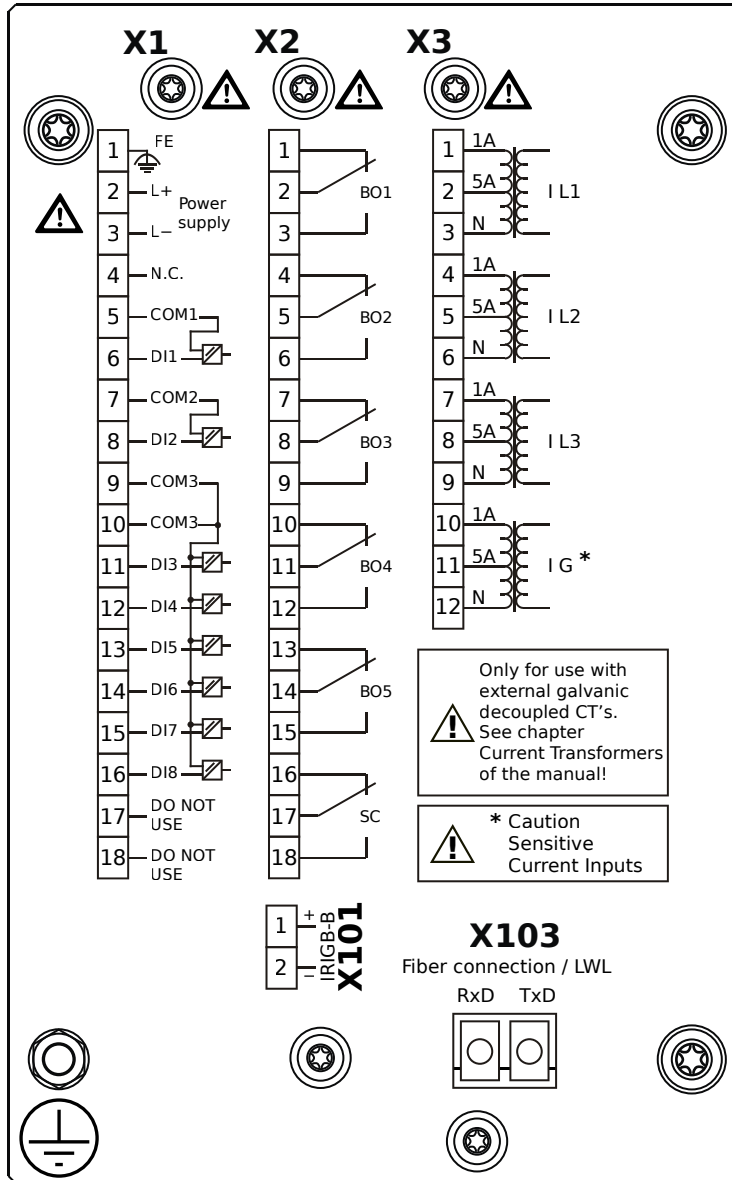

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2A1BKB

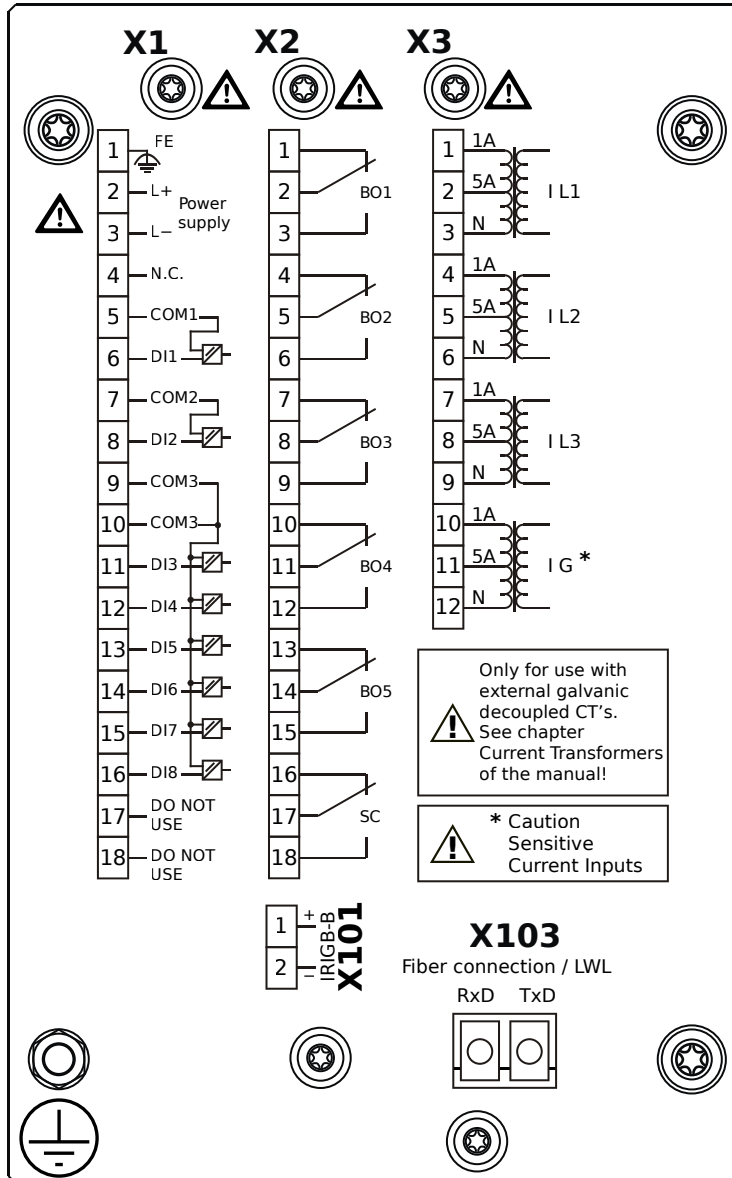


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector


MRM4-2A1BLA

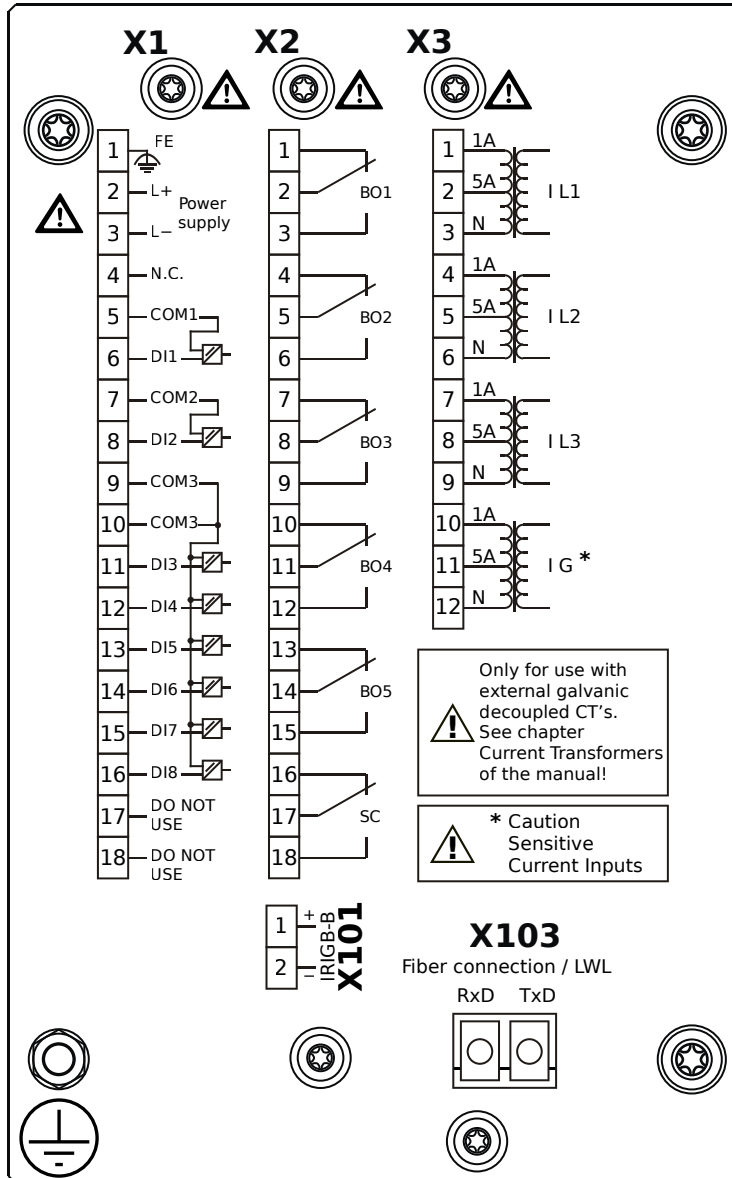

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2A1BLB

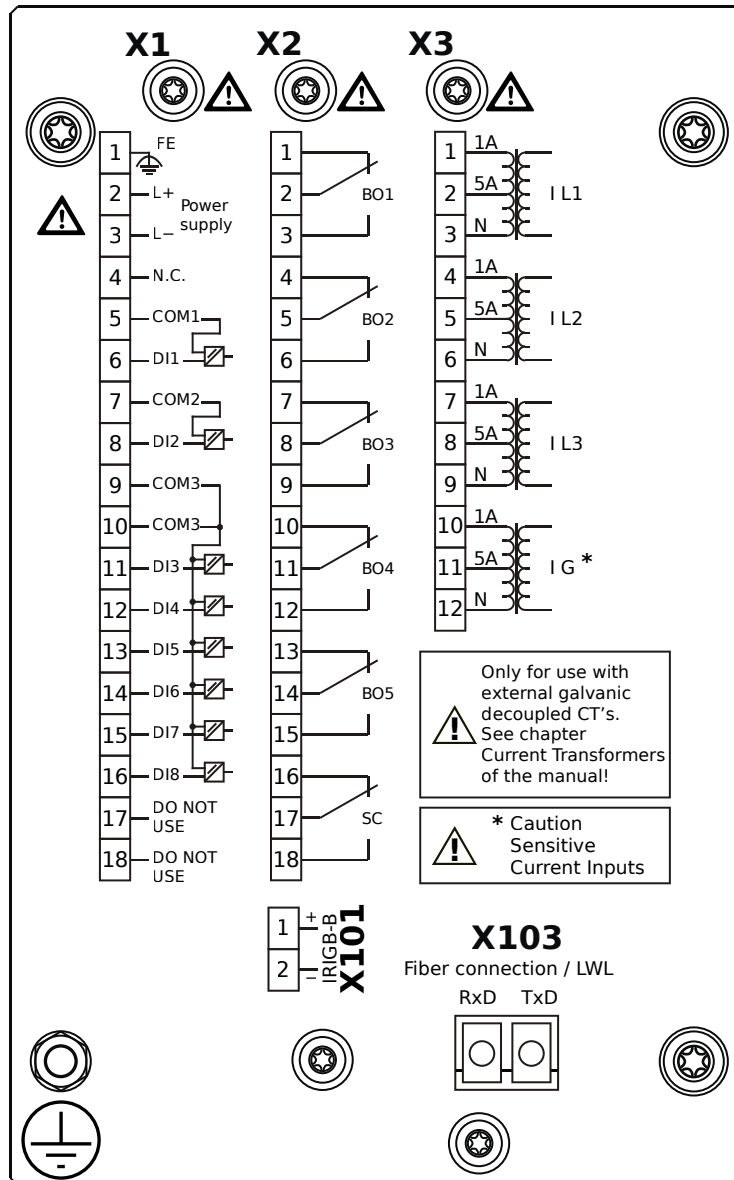


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector


MRM4-2A1BOA

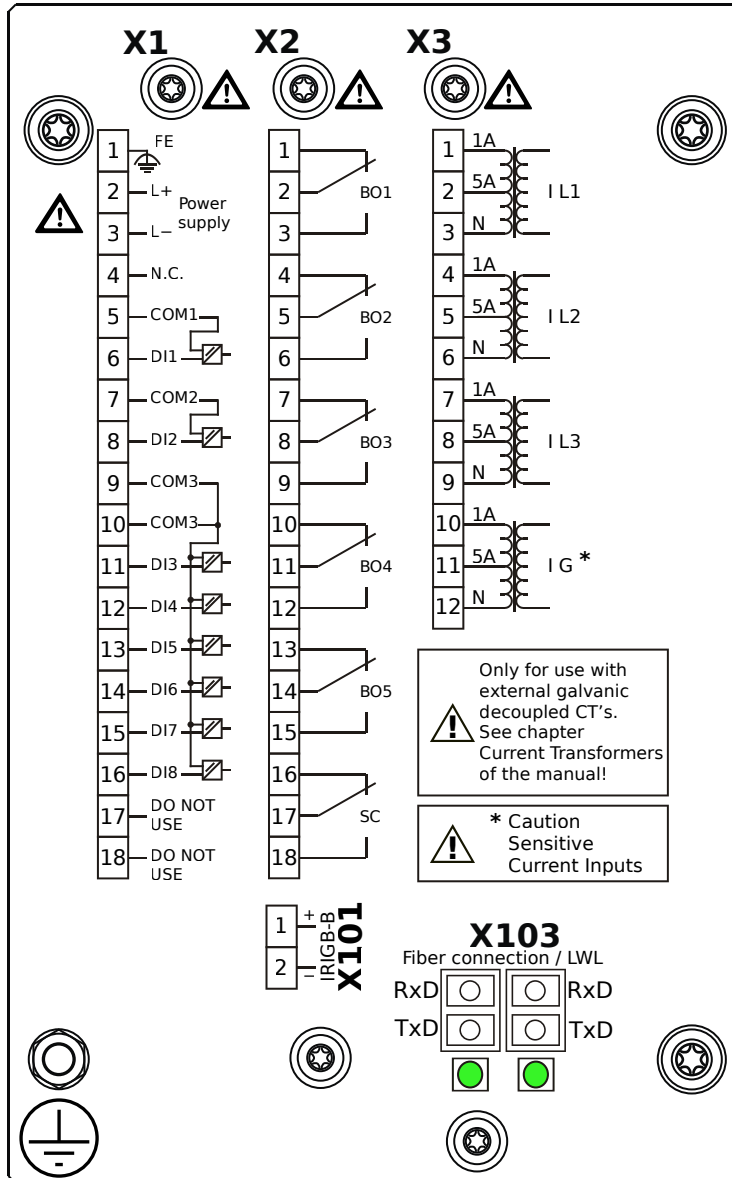

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A1BOB

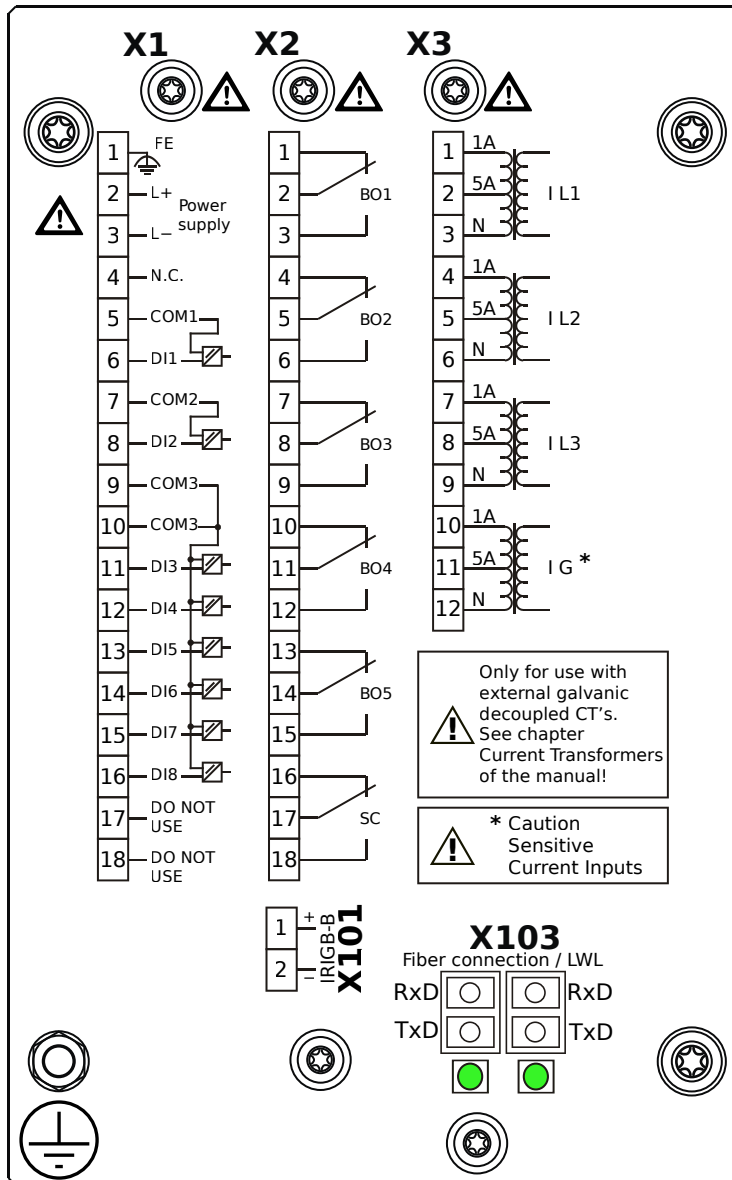


Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector


MRM4-2A1BPA

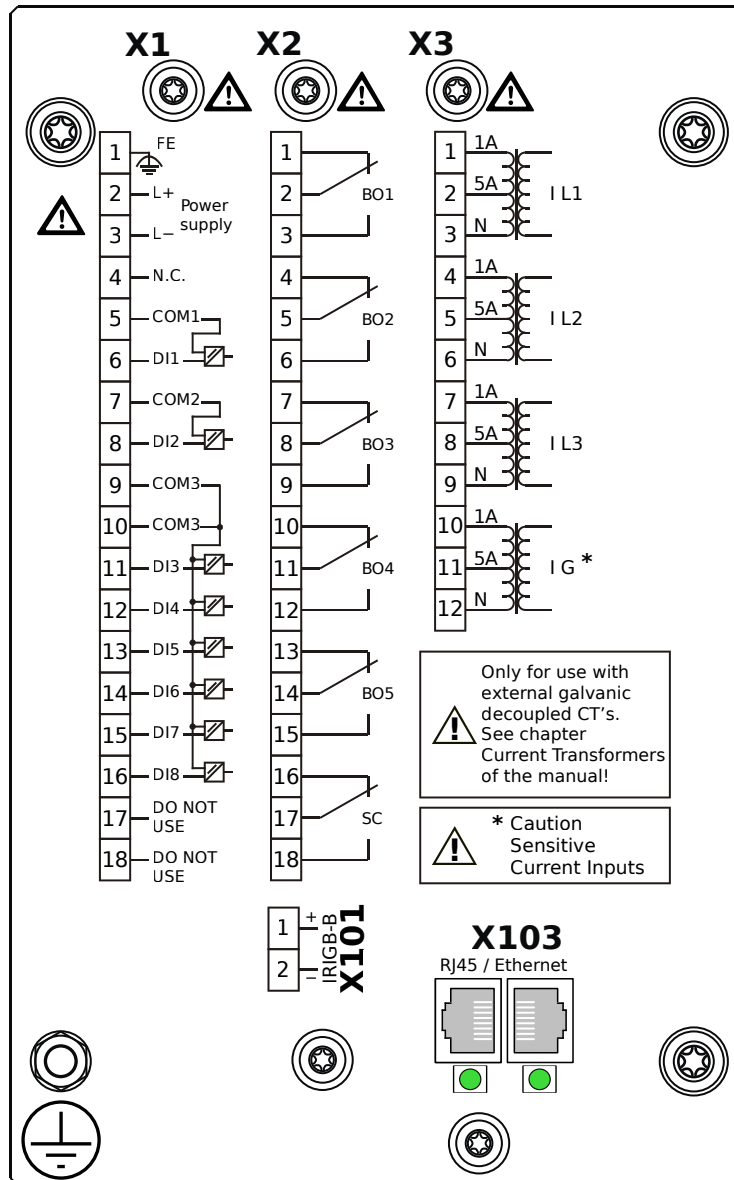

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2A1BPB

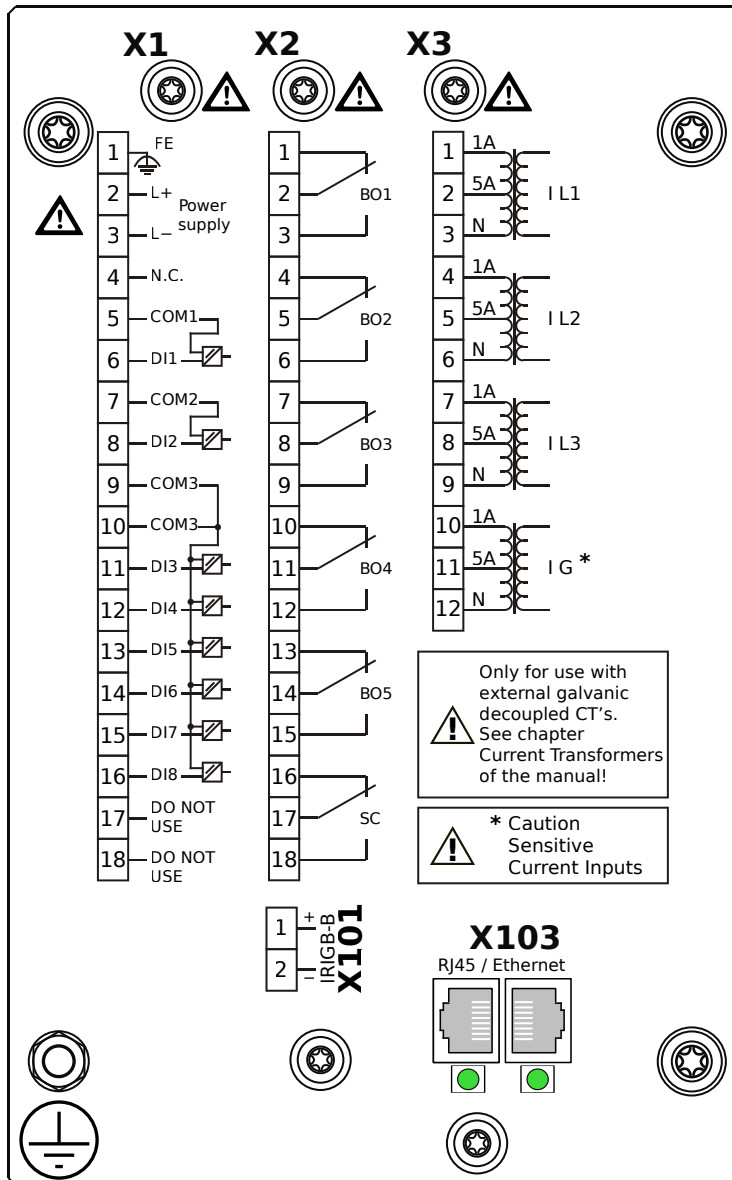

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – IRIG-B00X

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)


MRM4-2A1BQA

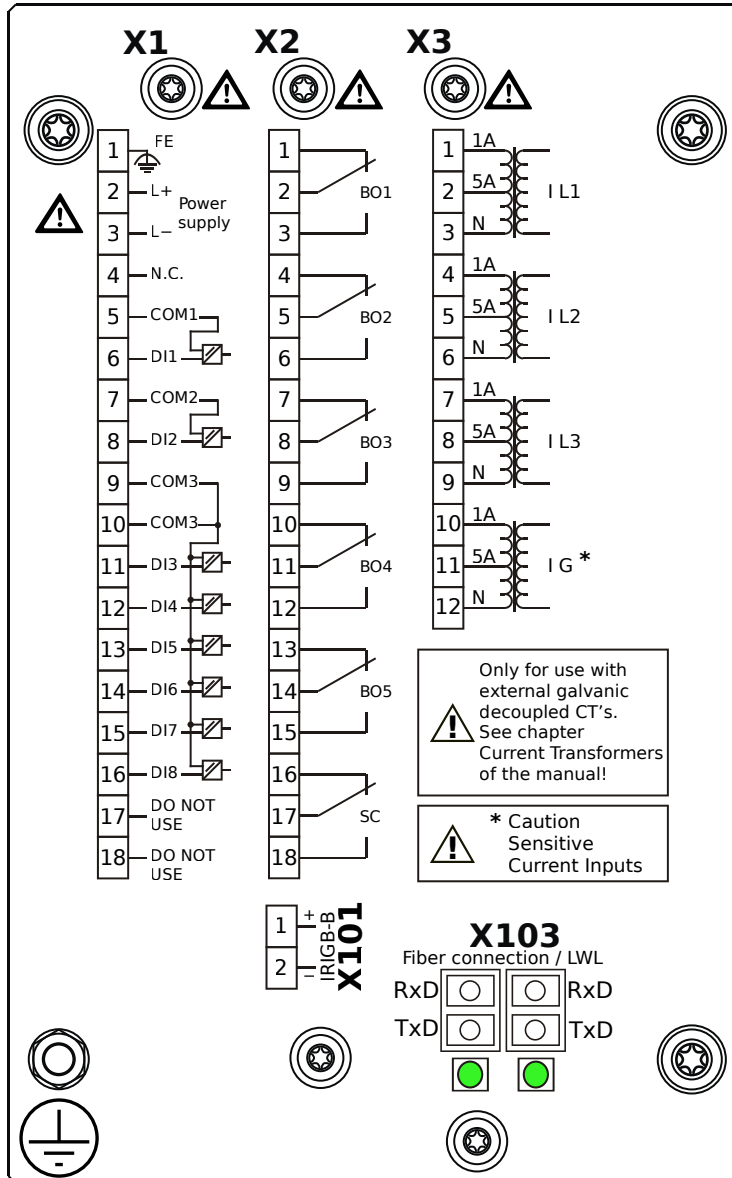

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X101** – IRIG-B00X
- X103** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A1BQB

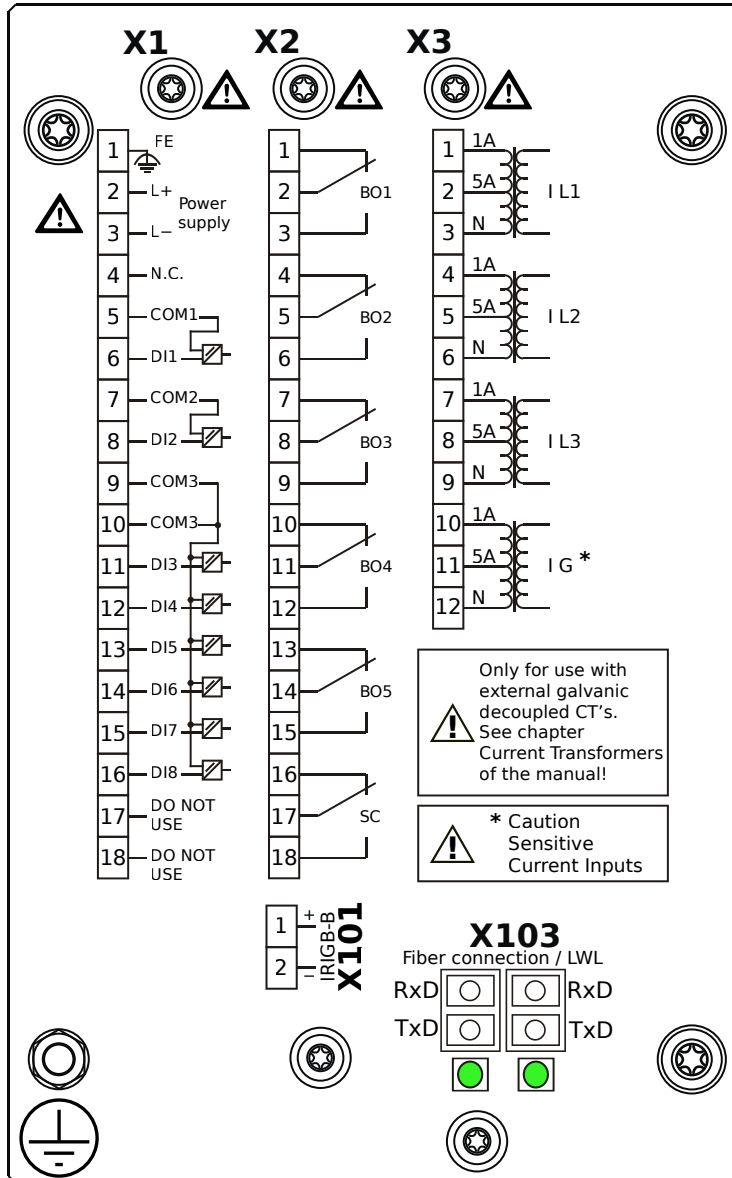

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2A1BRA

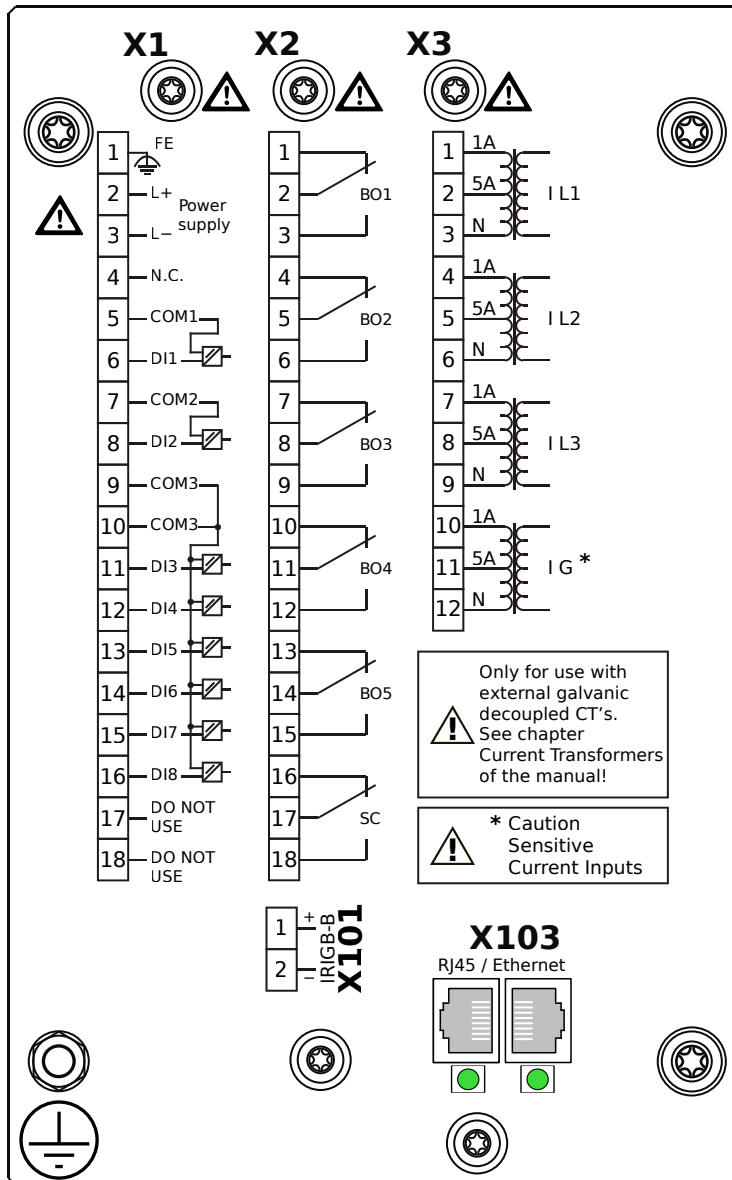

Housing B1, small display, 19" rack mounting

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2A1BRB

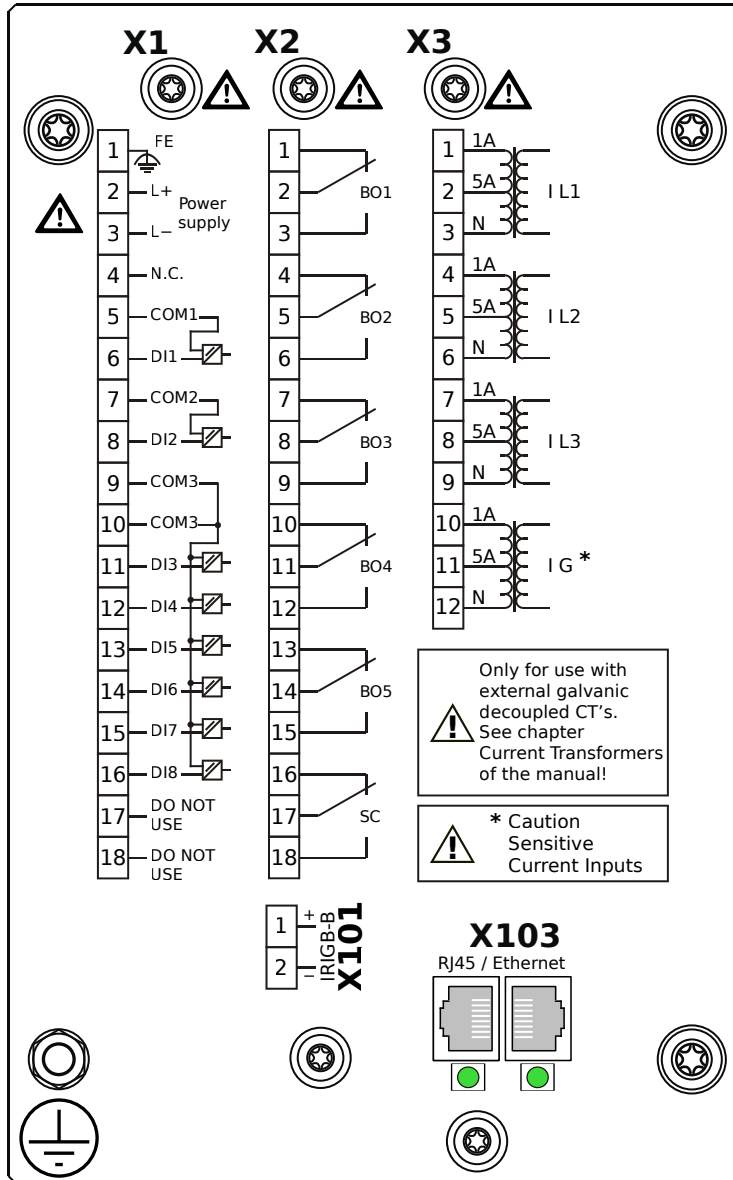

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs


X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – IRIG-B00X

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)


MRM4-2A1BTA

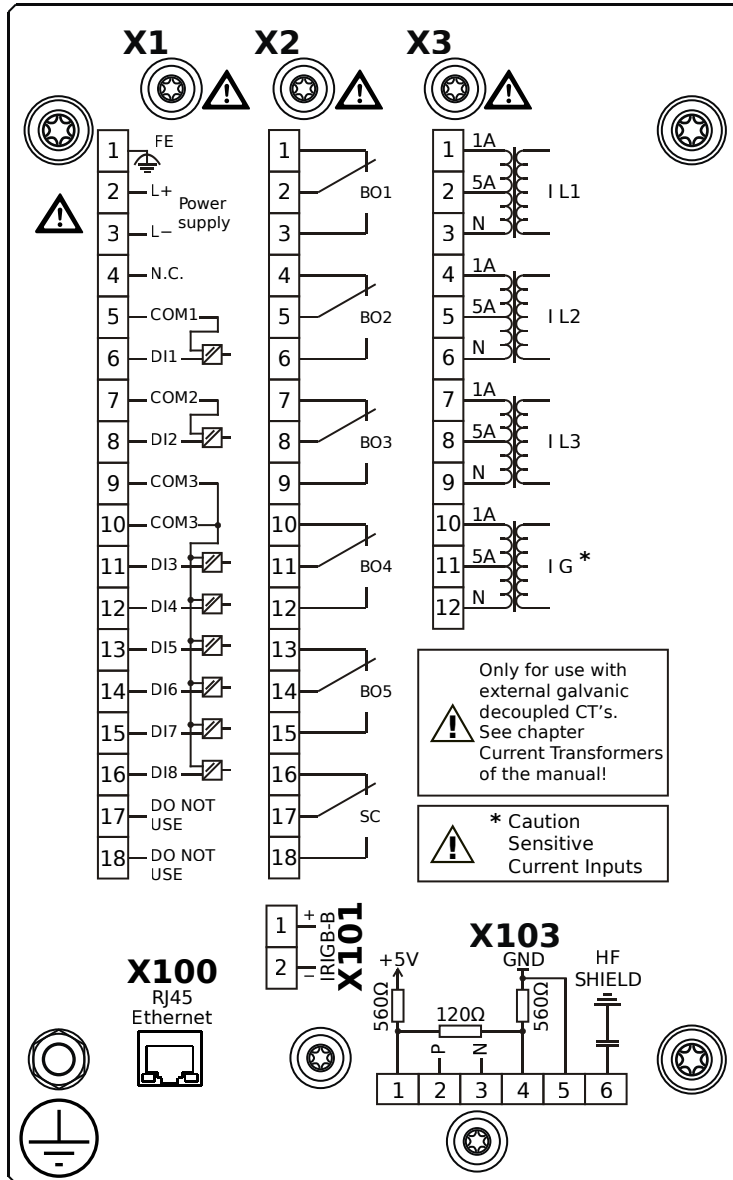

Housing B1, small display, 19" rack mounting

- X1** – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs
- X2** – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact
- X3** – TIs: Standard phase current measuring card and sensitive ground current measuring
- X100** – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)
- X101** – IRIG-B00X
- X103** – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2A1BTB

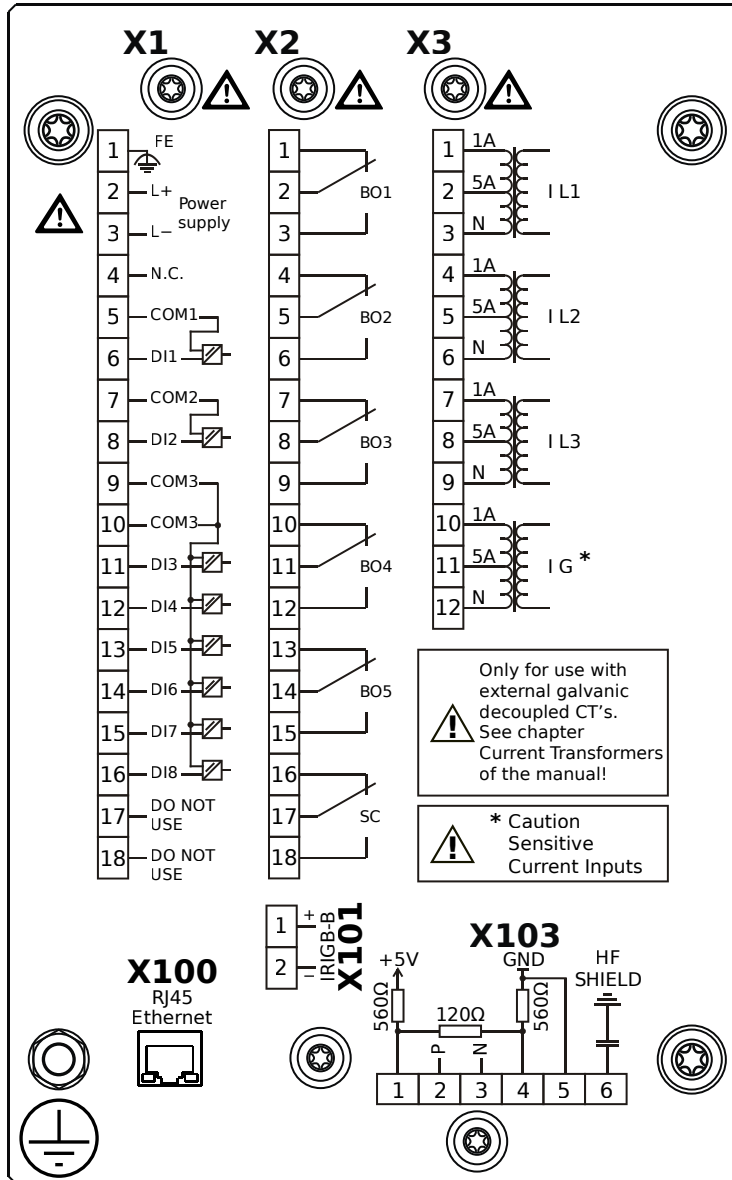

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI8-X1: Wide-range power supply unit, incl. 2 non-grouped digital inputs and 6 grouped digital inputs

X2 – OR5: Assembly Group with 5 Output Relays (Changeover / Form C) + 1 Supervision Contact

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring


X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

FX)

X101 – IRIG-B00X

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B0AAA

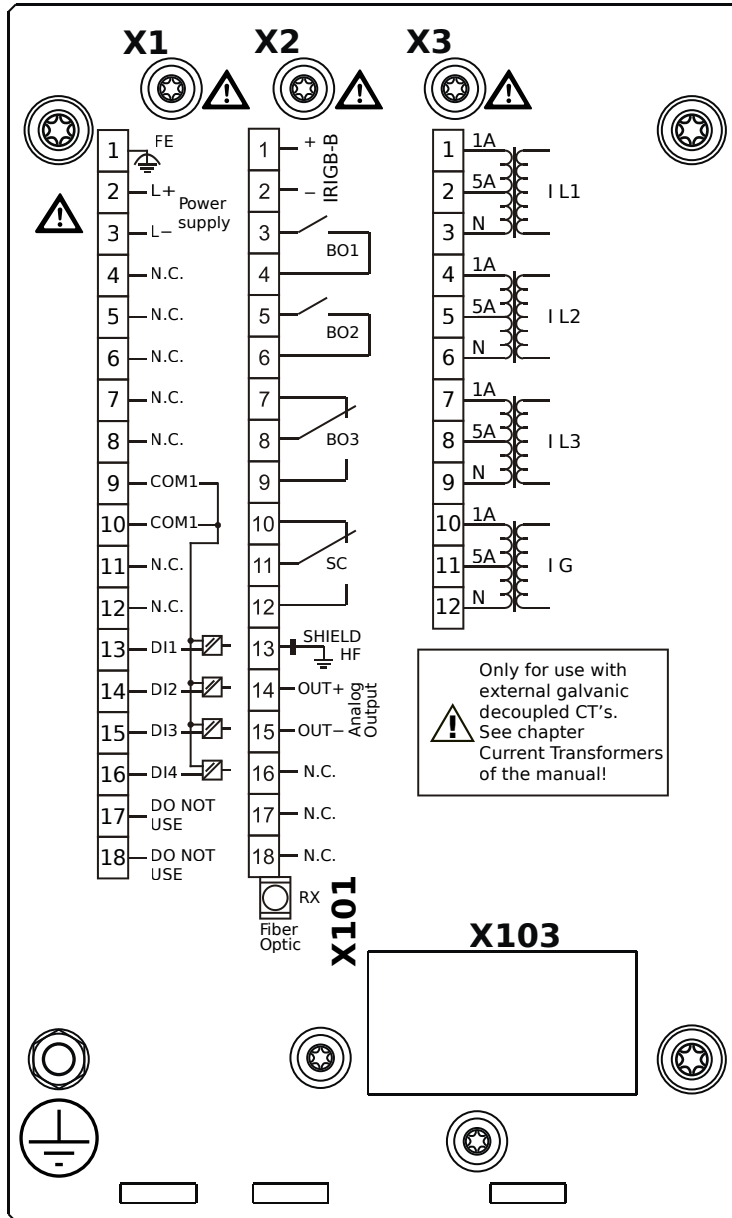

Housing B1, small display, door mounting


X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0AAB

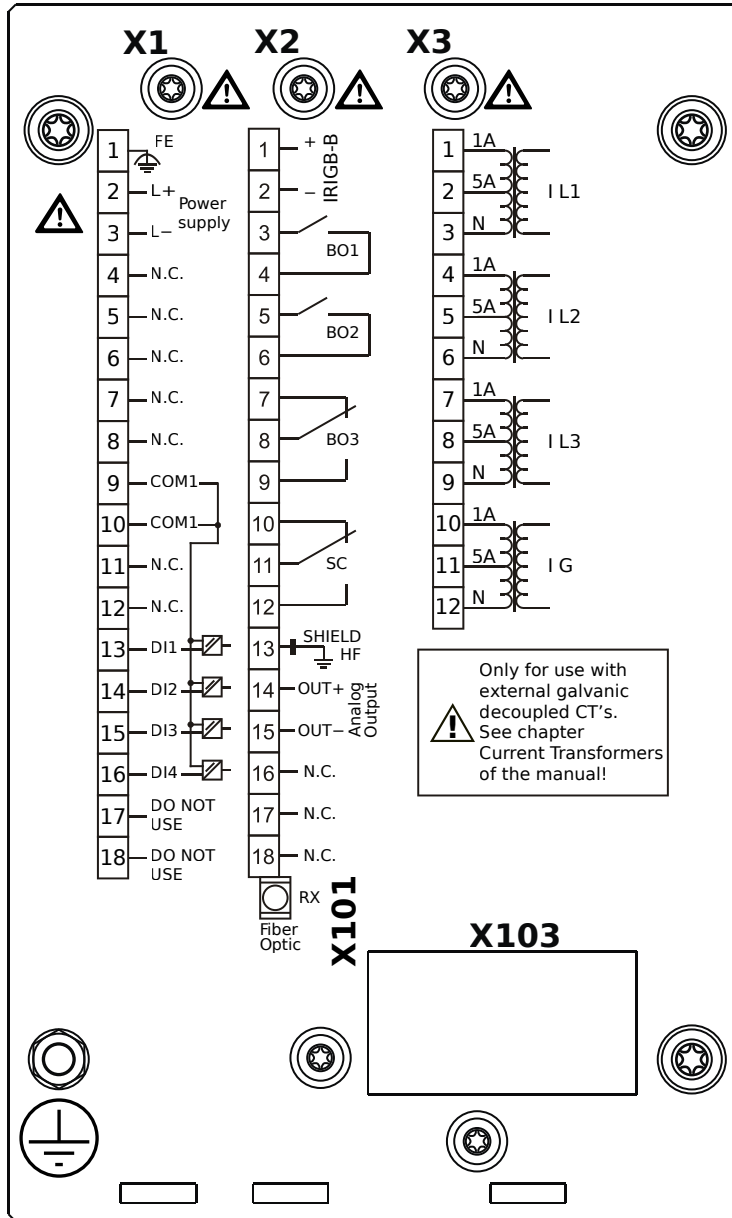

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)


X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0ABA

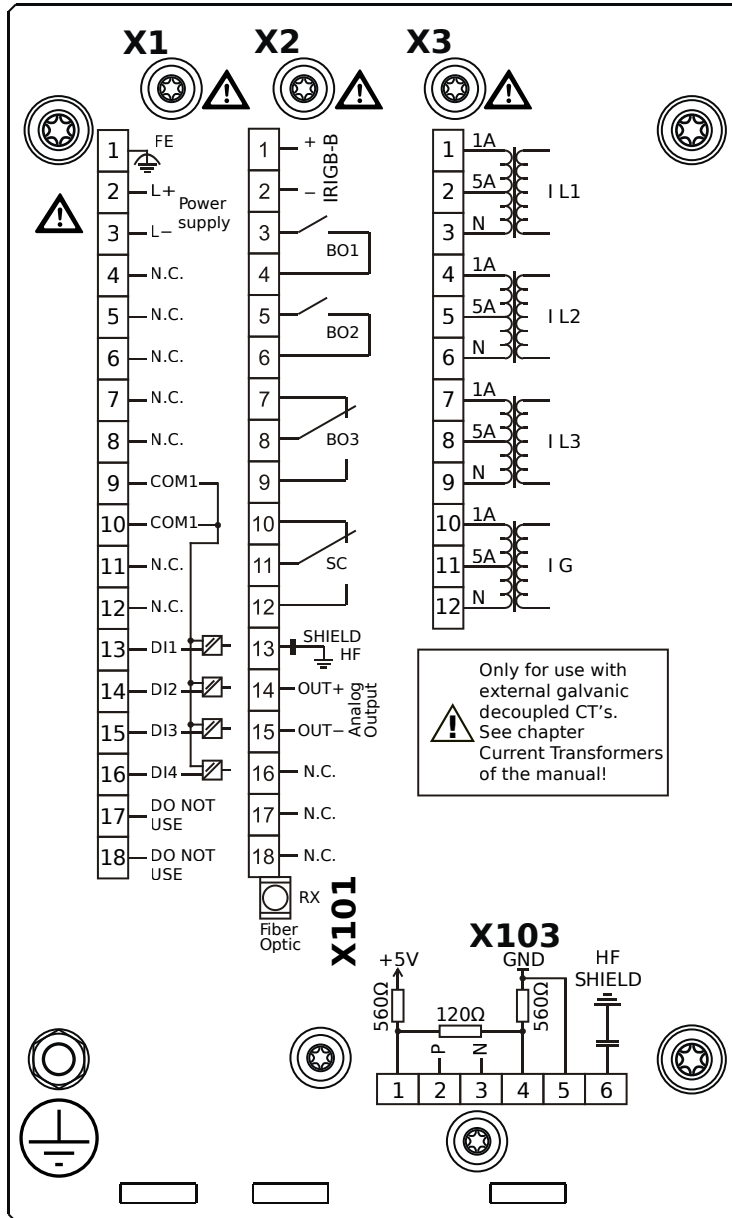

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2B0ABB

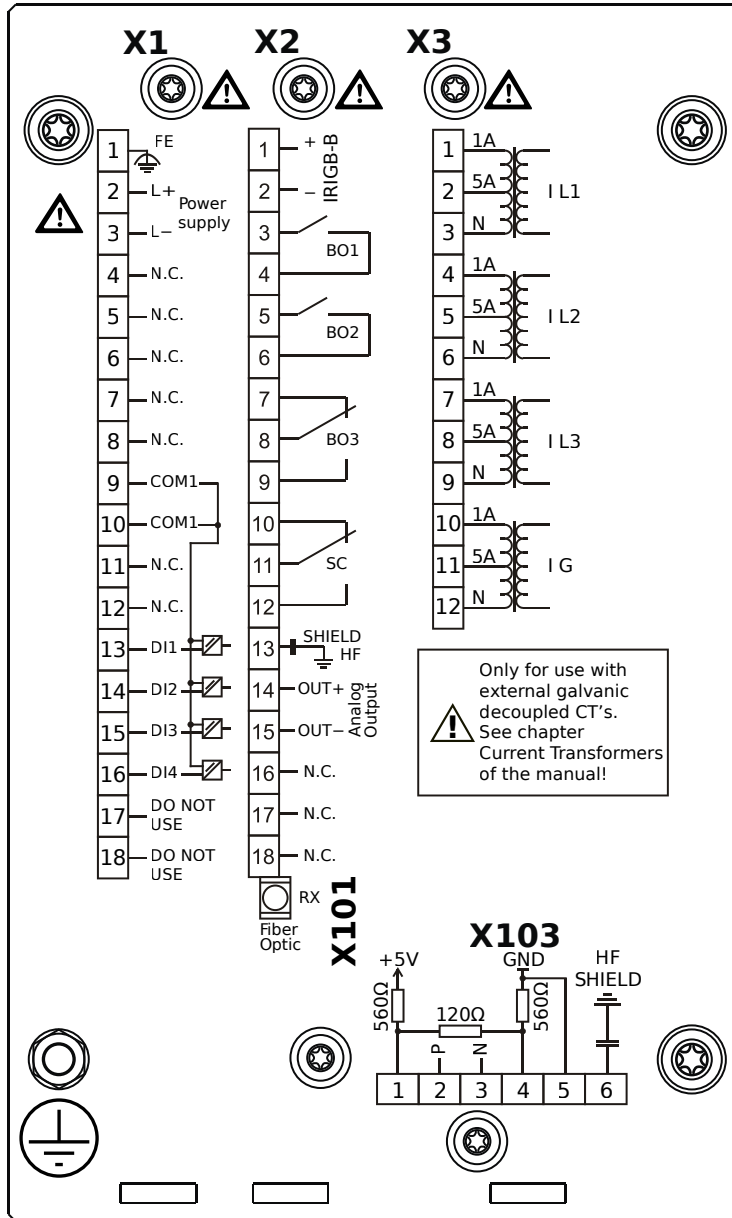

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2B0ACA

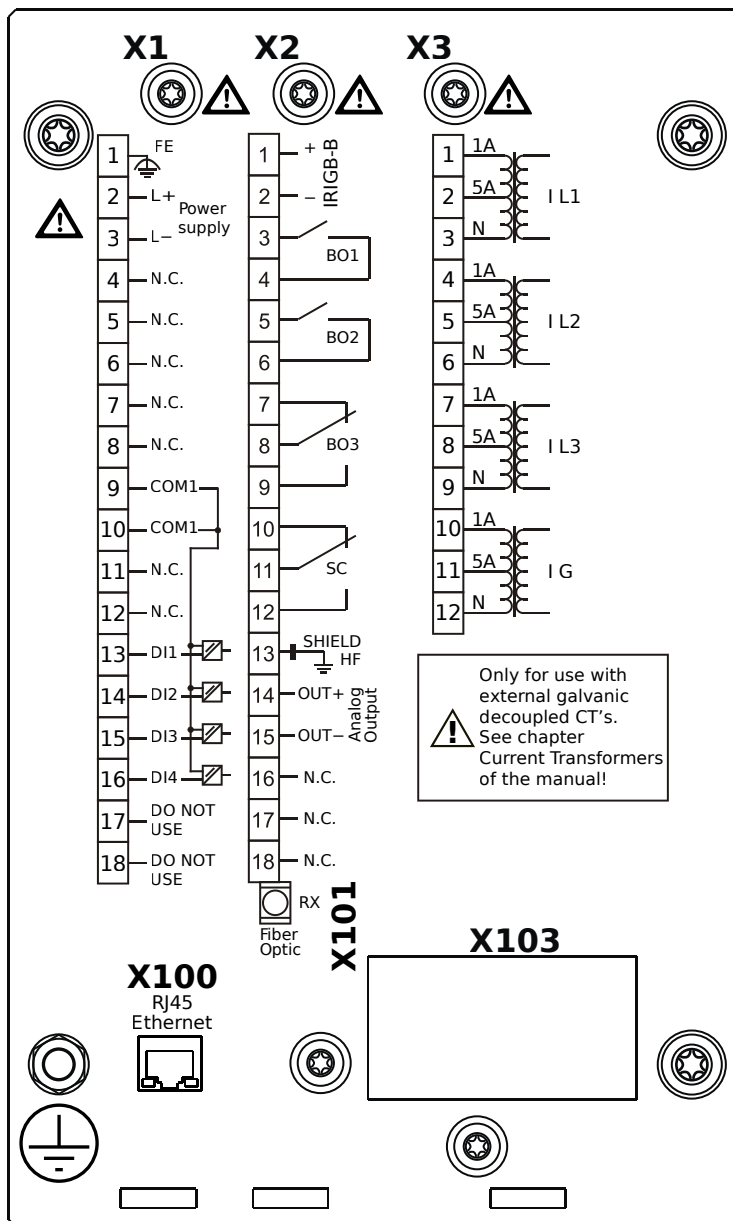

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0ACB

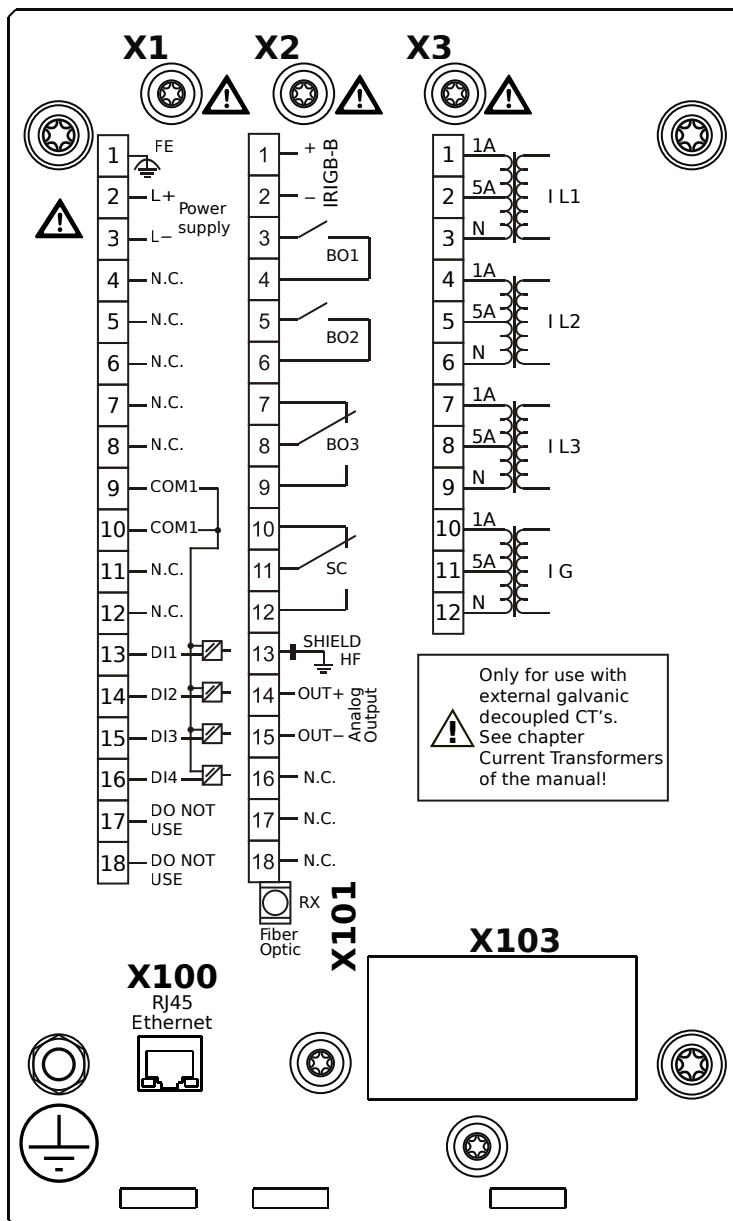

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0ADA

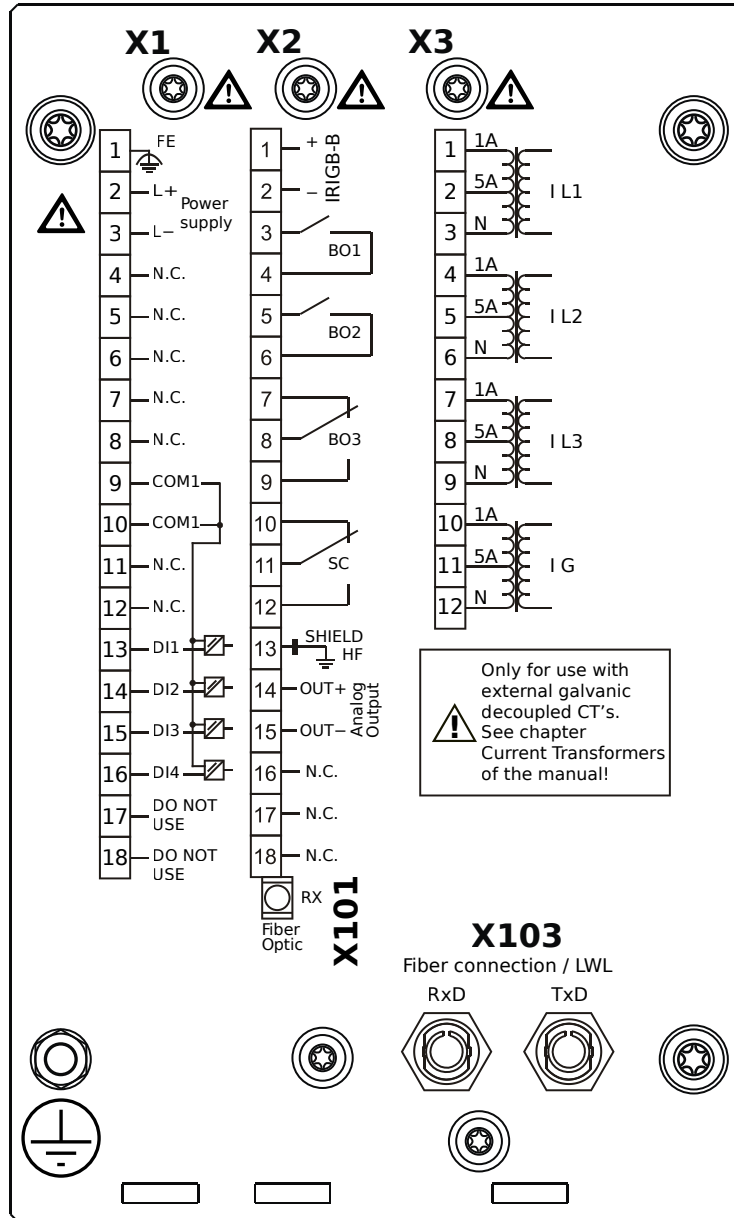

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2B0ADB

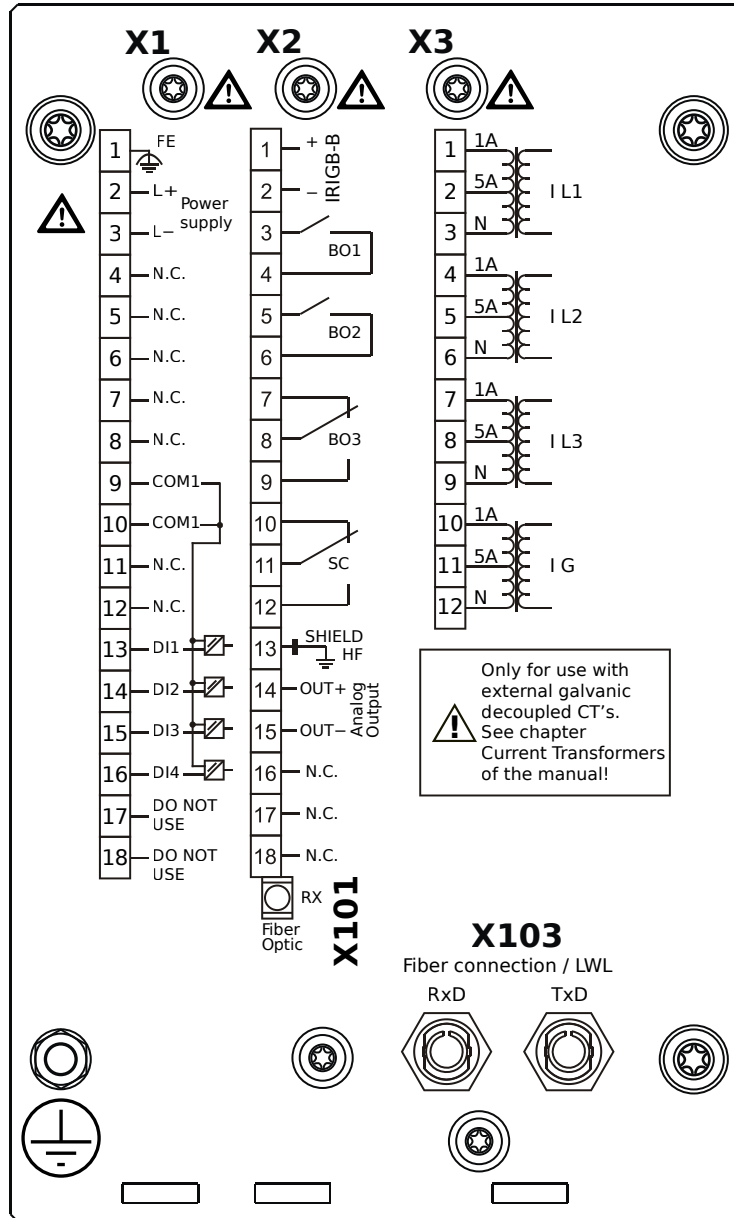

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2B0AEA

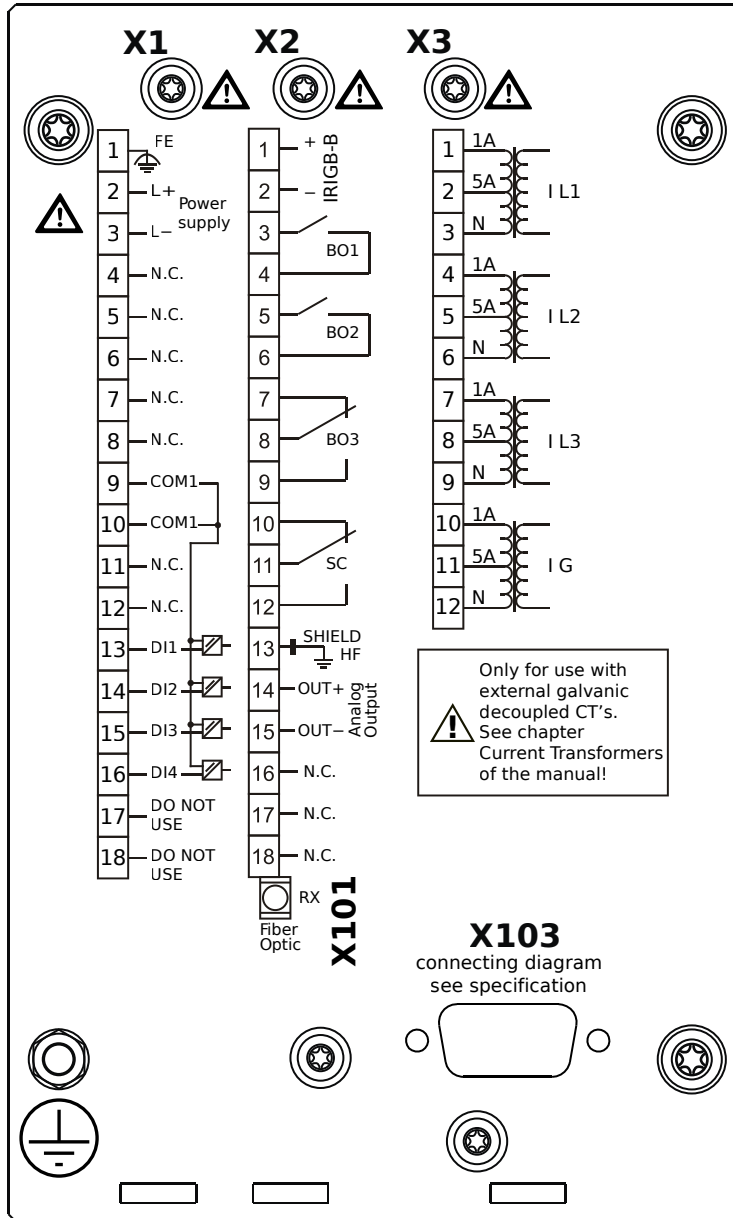

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, RS485, D-SUB

MRM4-2B0AEB

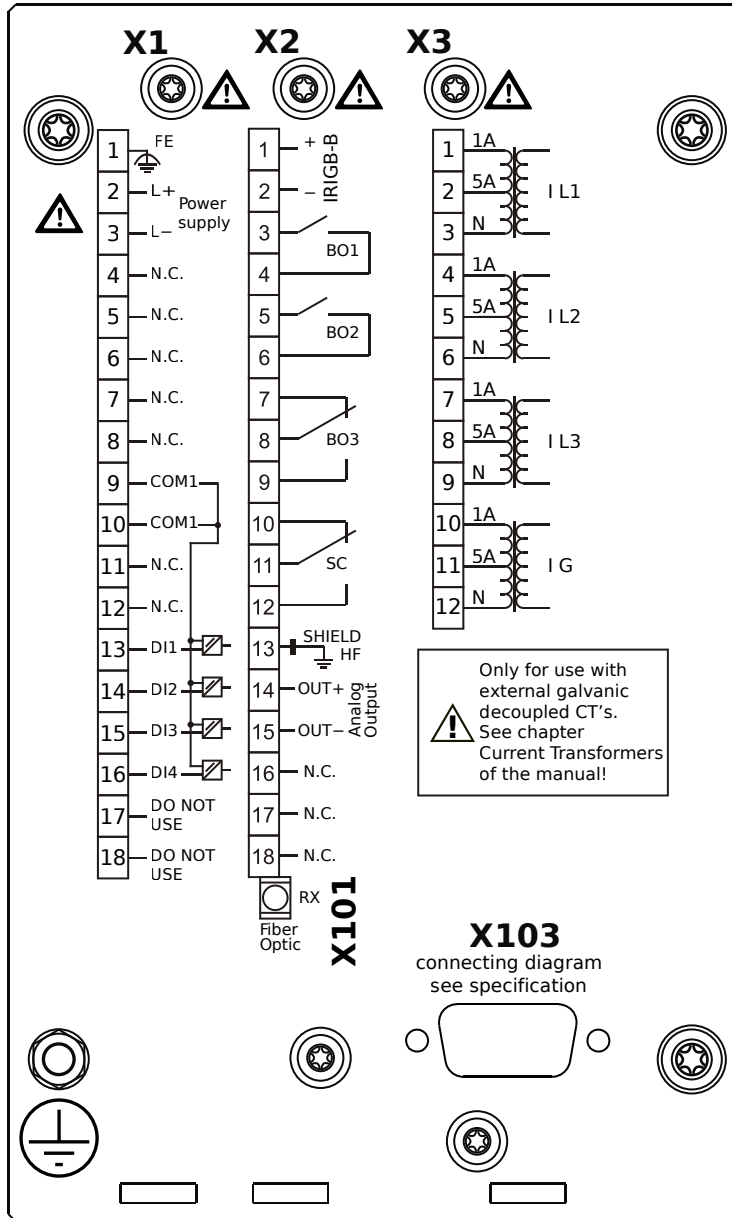

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, RS485, D-SUB

MRM4-2B0AFA

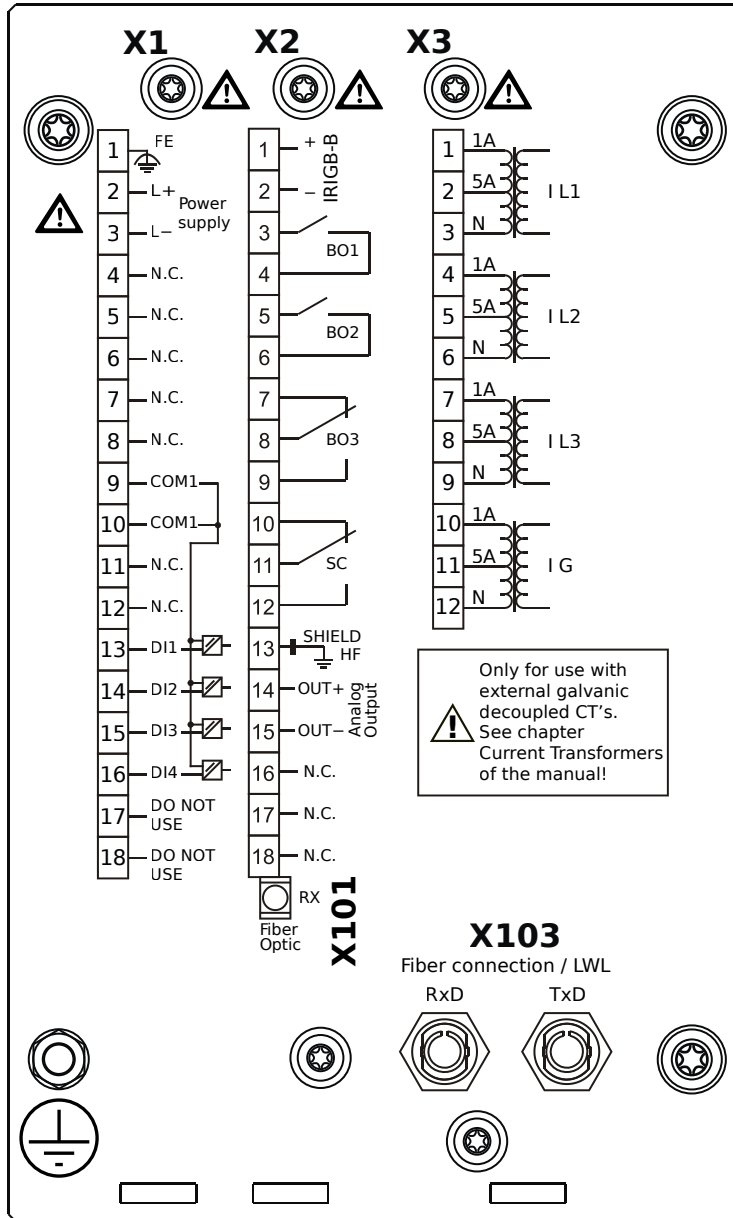

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2B0AFB

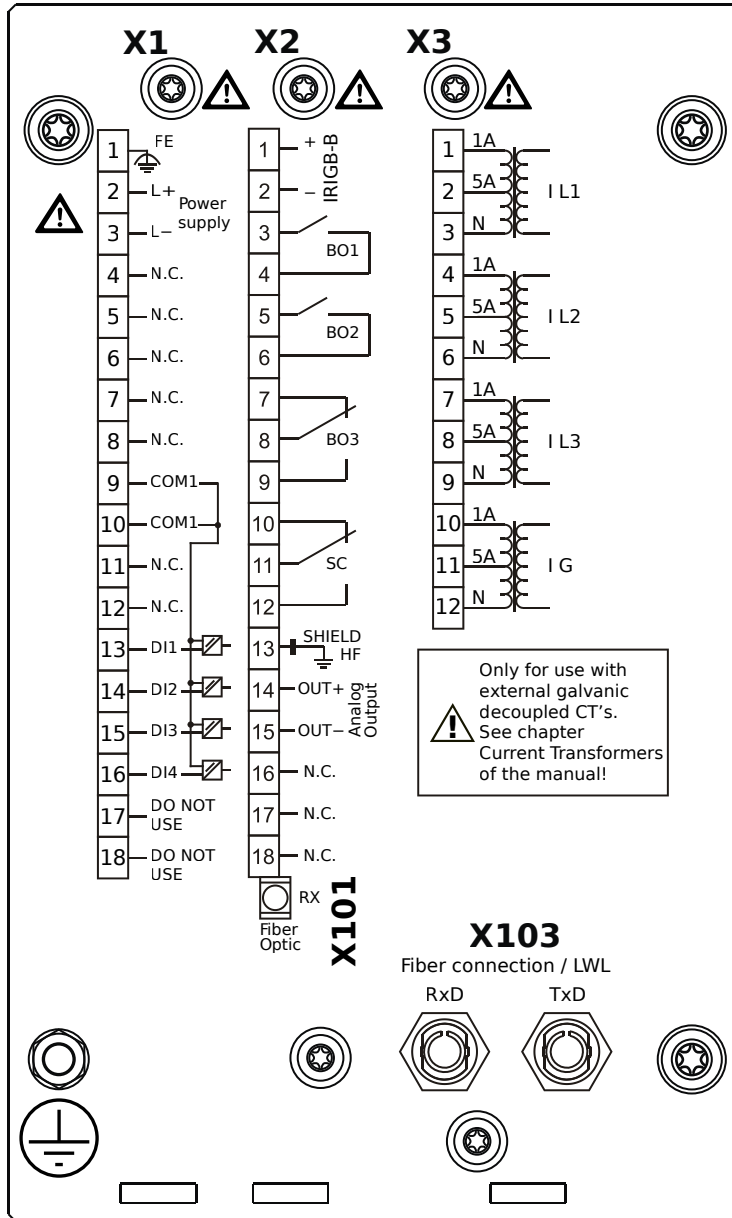

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2B0AGA

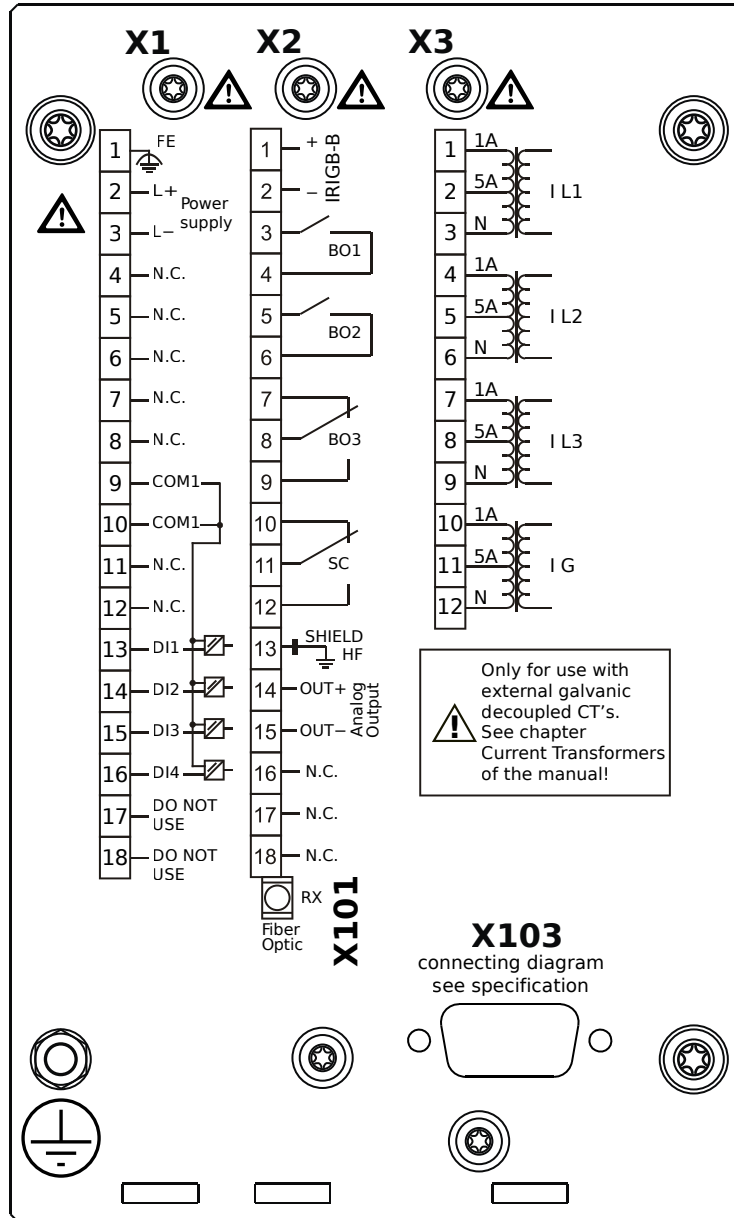

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2B0AGB

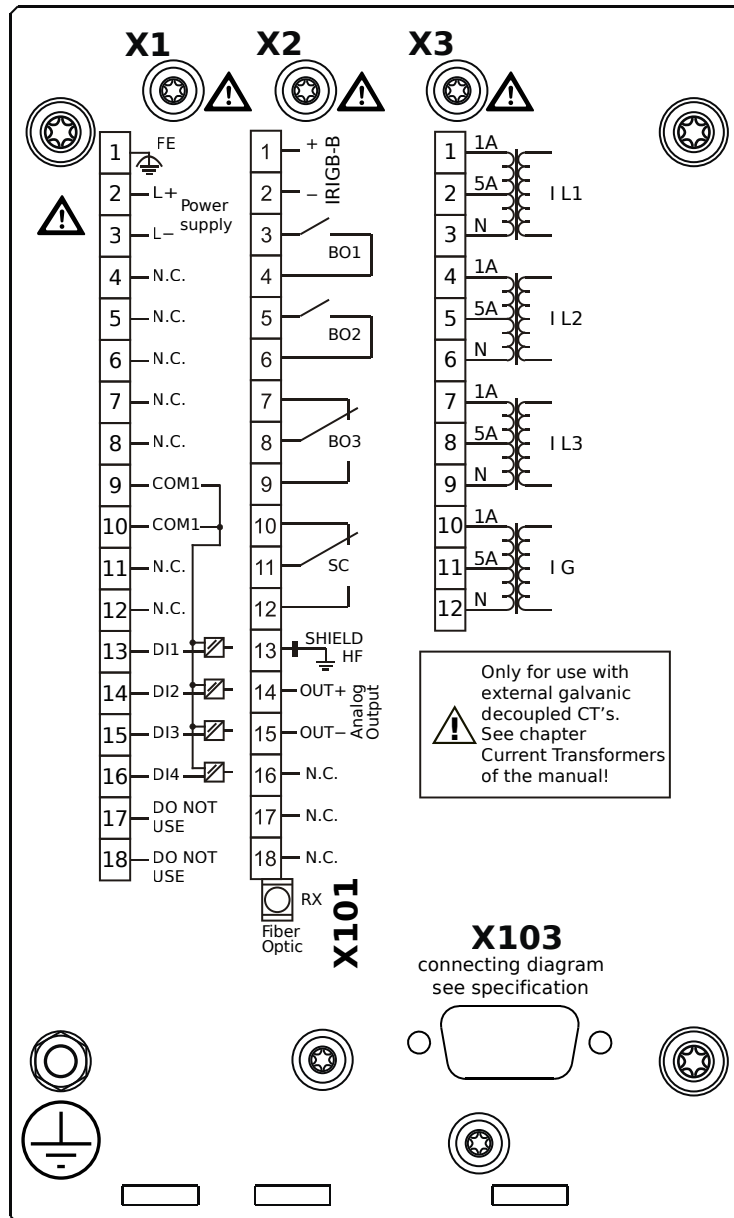

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

IRIG-B


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2B0AHA

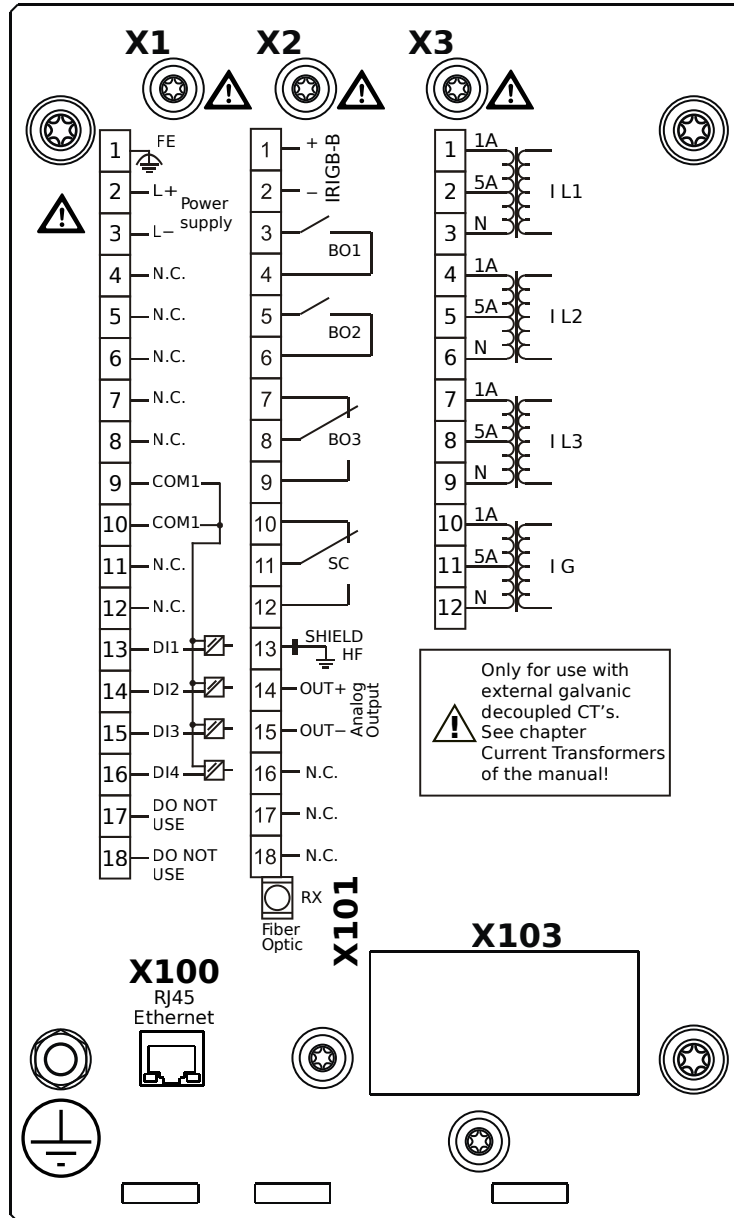

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0AHB

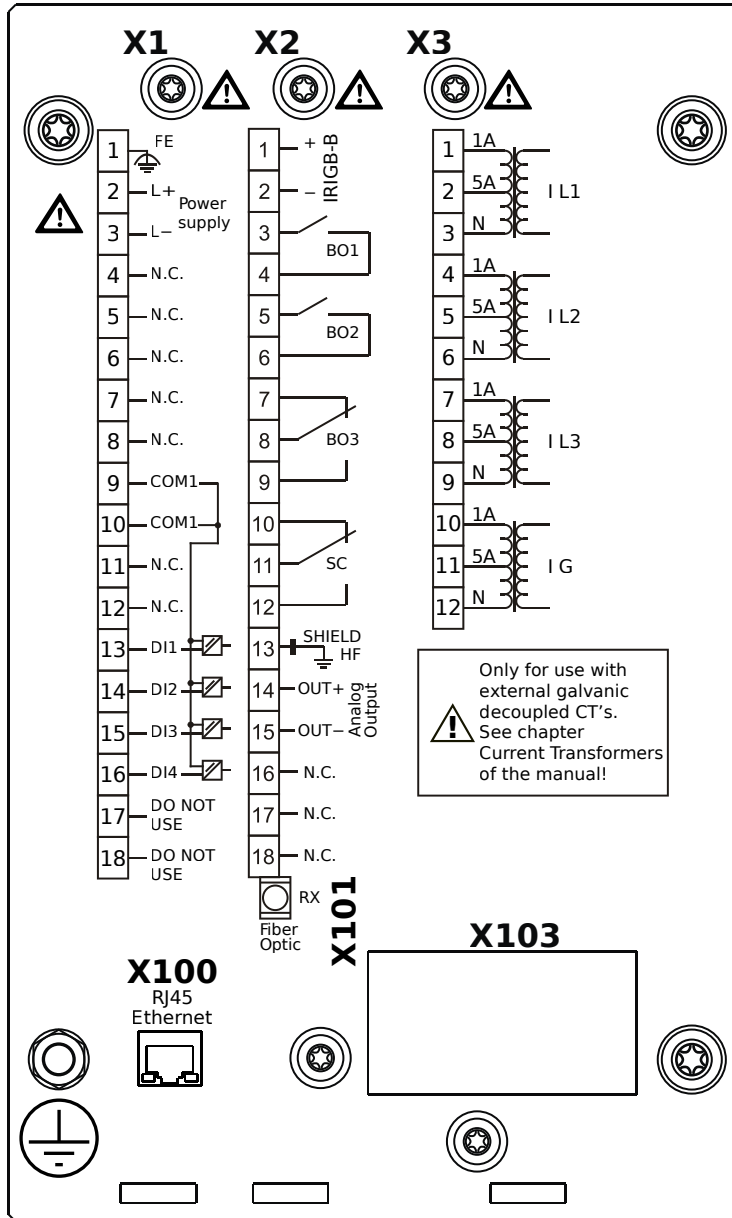

Housing B1, small display, door mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0AIA

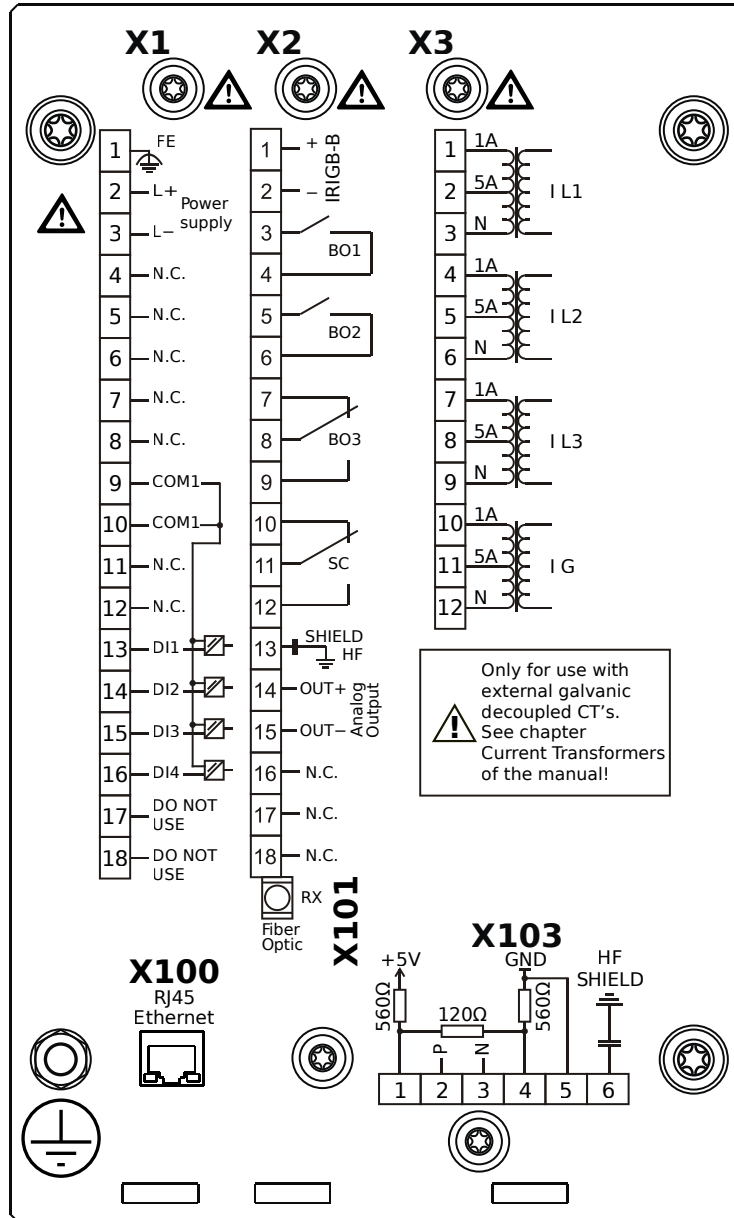

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TI: Standard current measuring card

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B0AIB

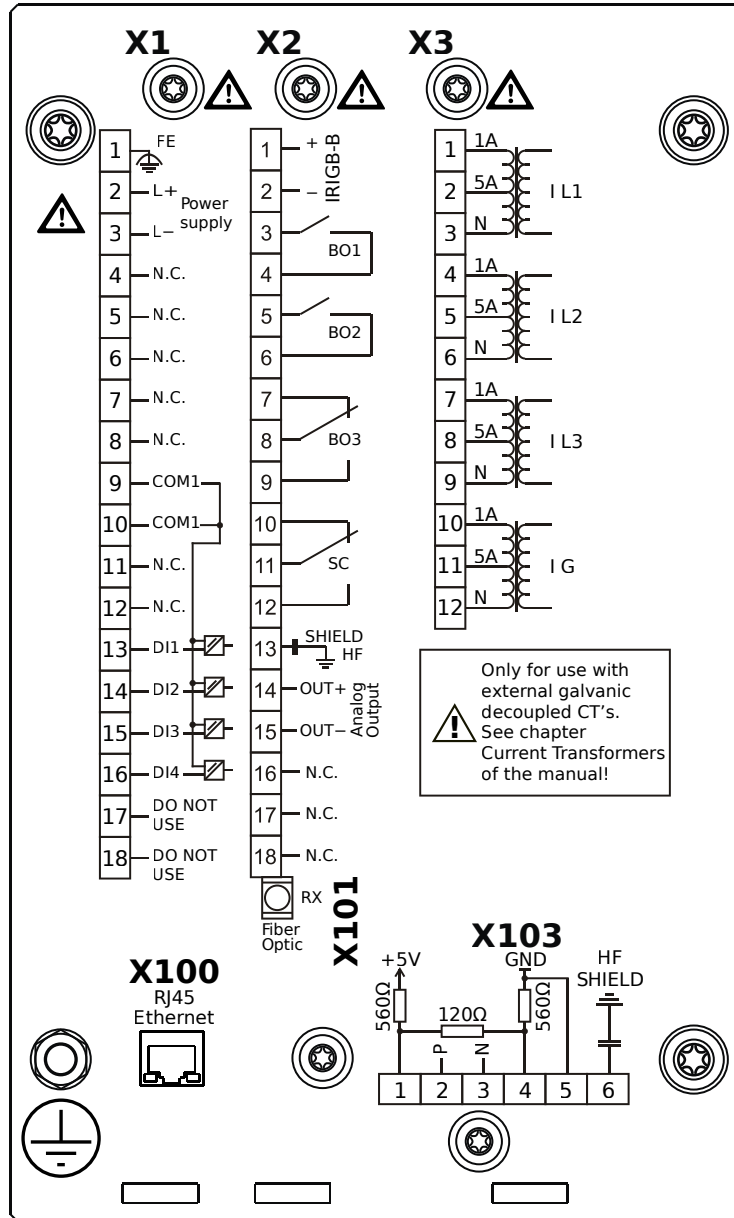

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

IRIG-B


X3 – TI: Standard current measuring card

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B0AKA

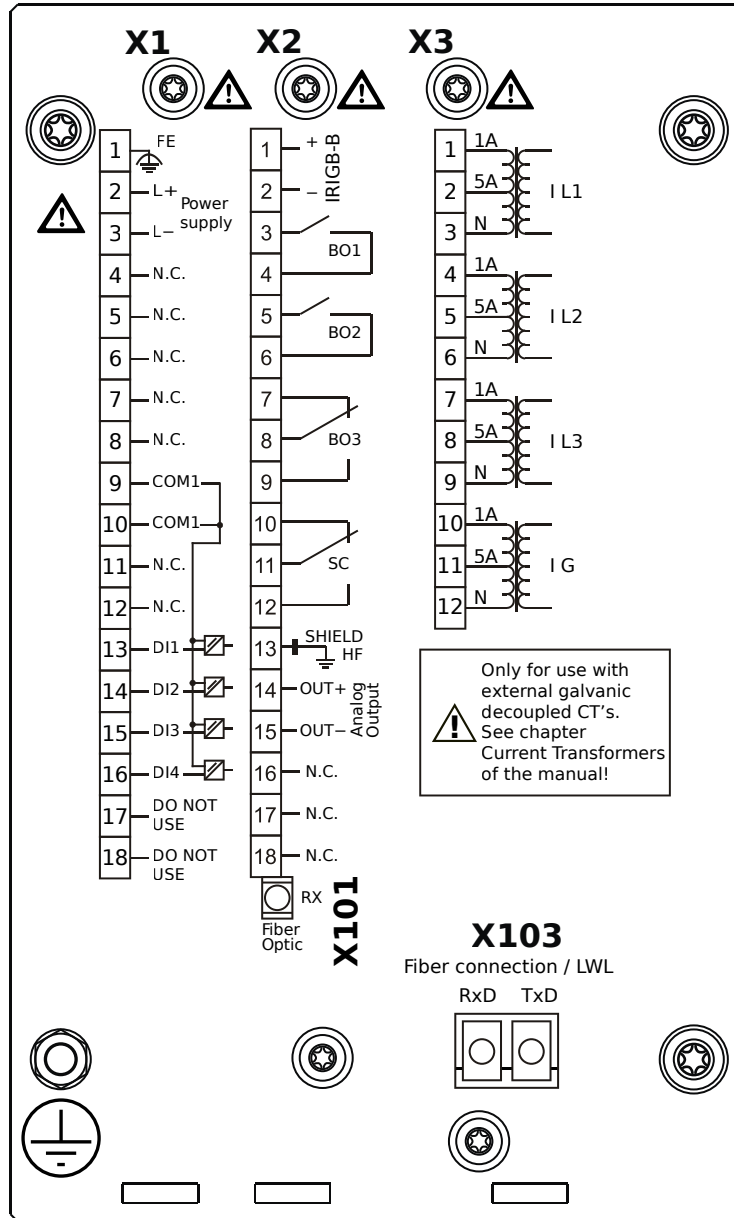

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B0AKB

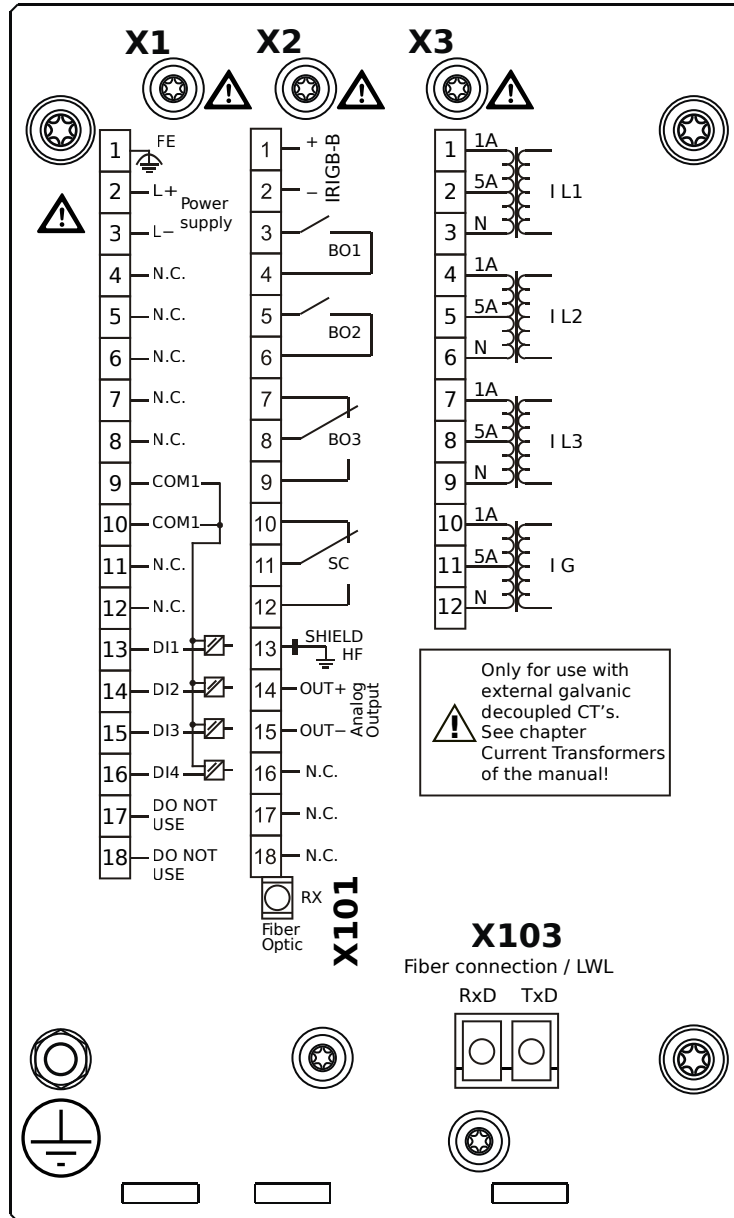

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

IRIG-B


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B0ALA

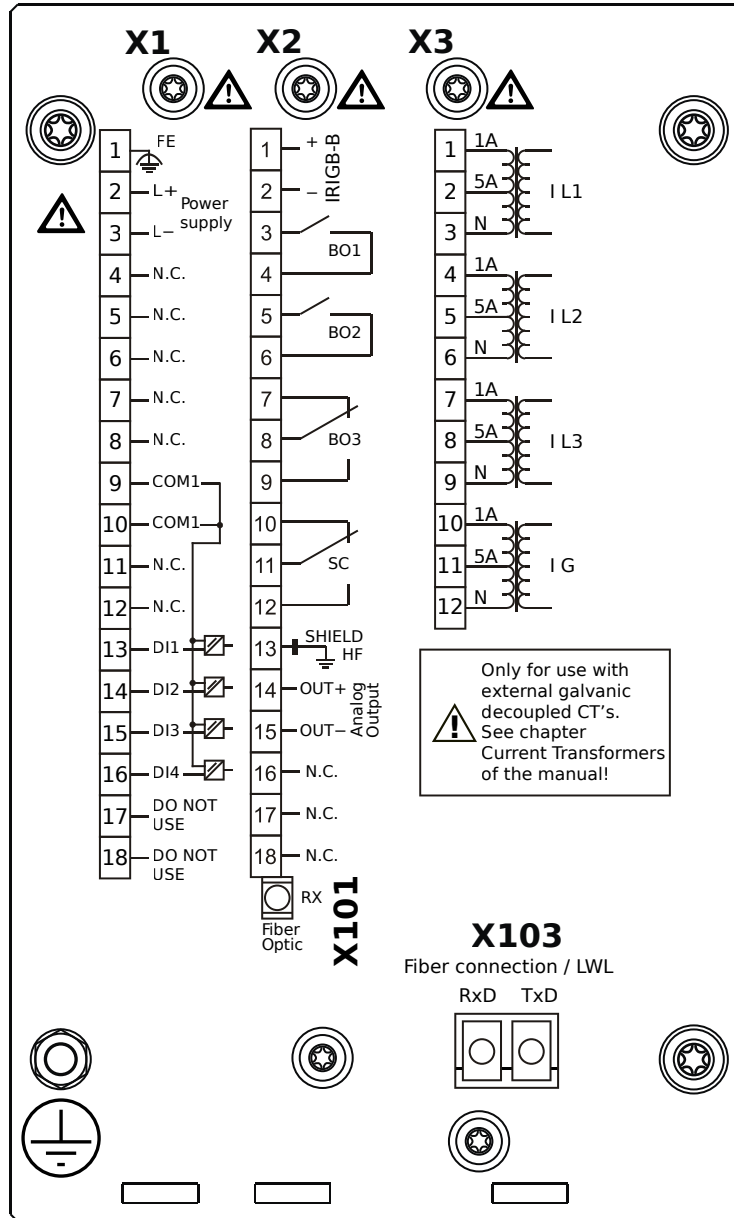

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B0ALB

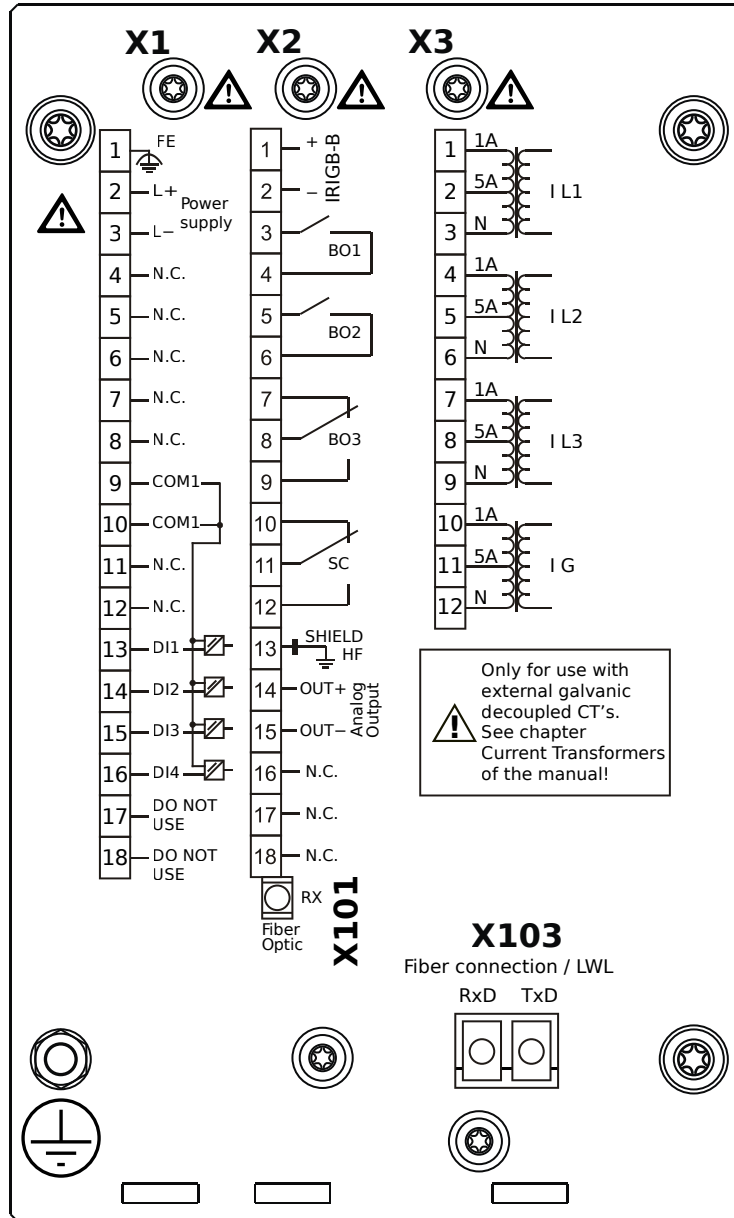

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

IRIG-B


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B0AOA

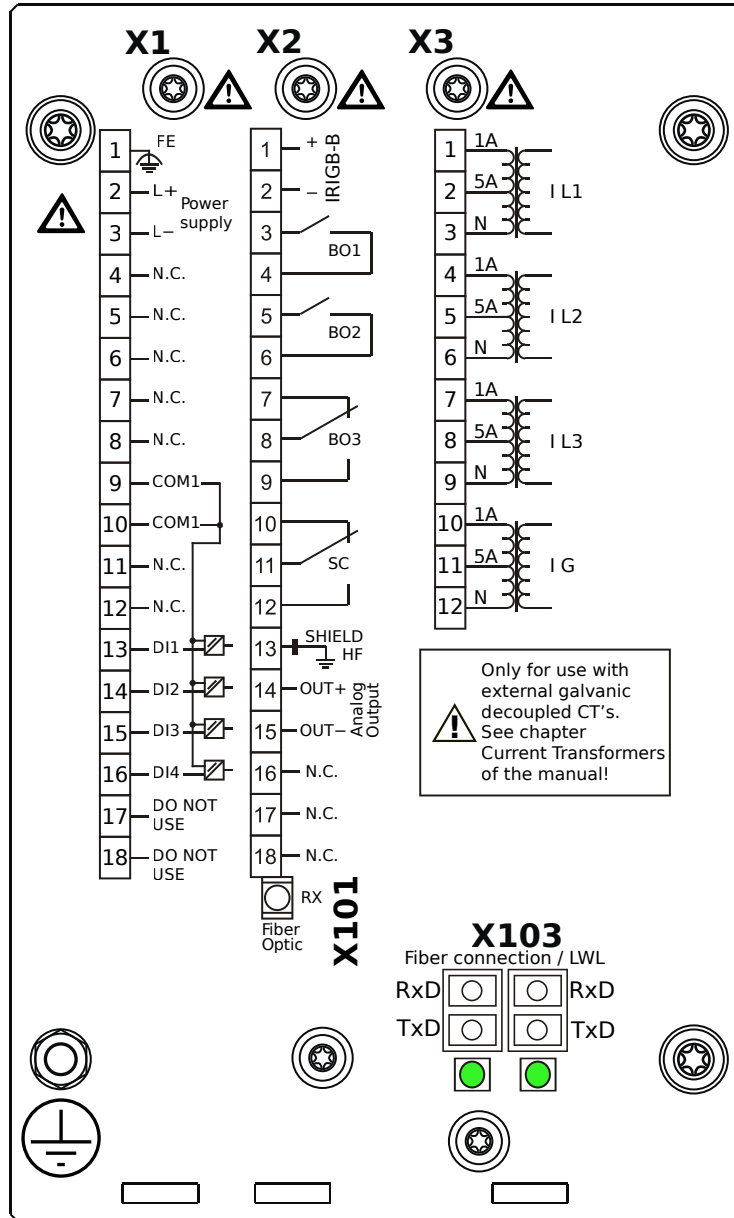

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B0AOB

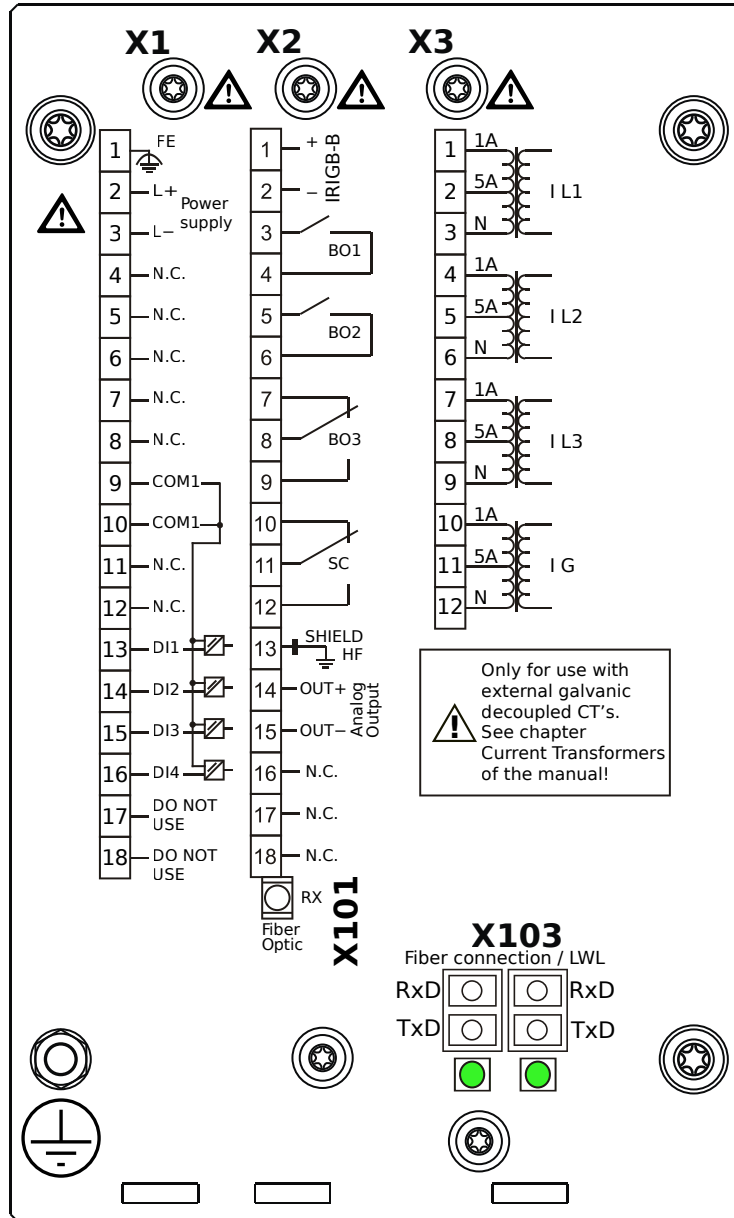

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B0APA

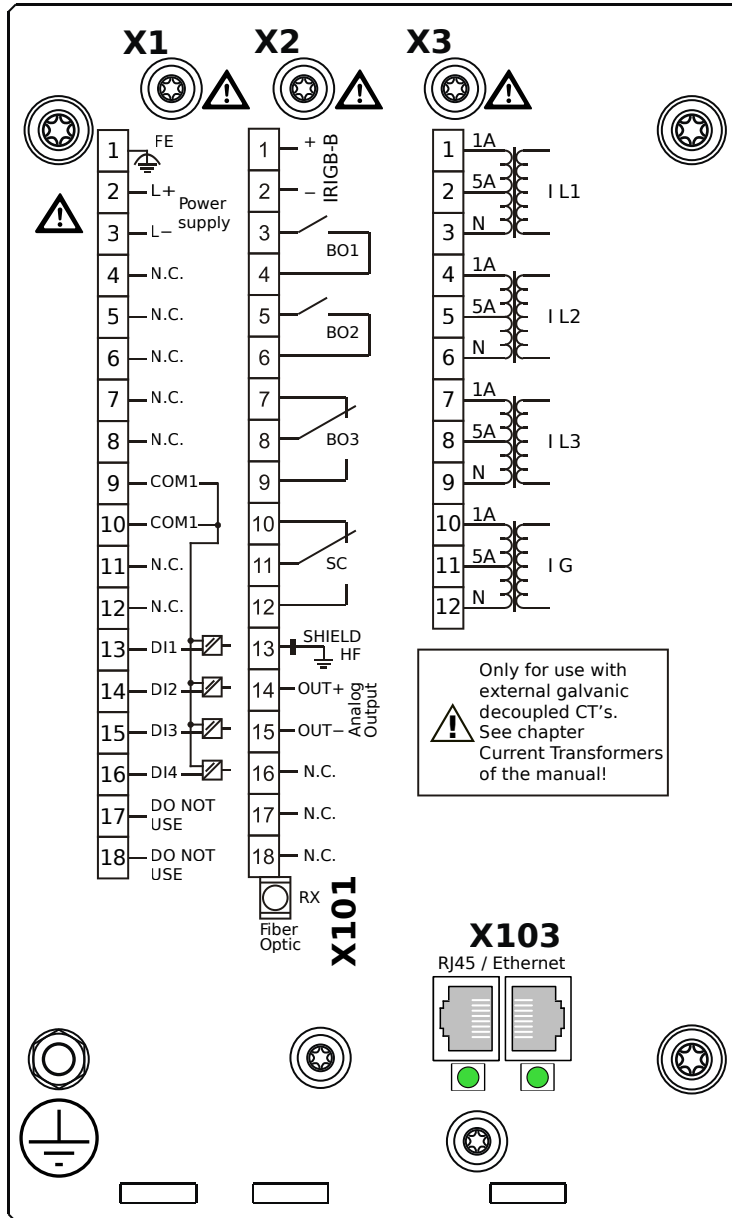

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B0APB

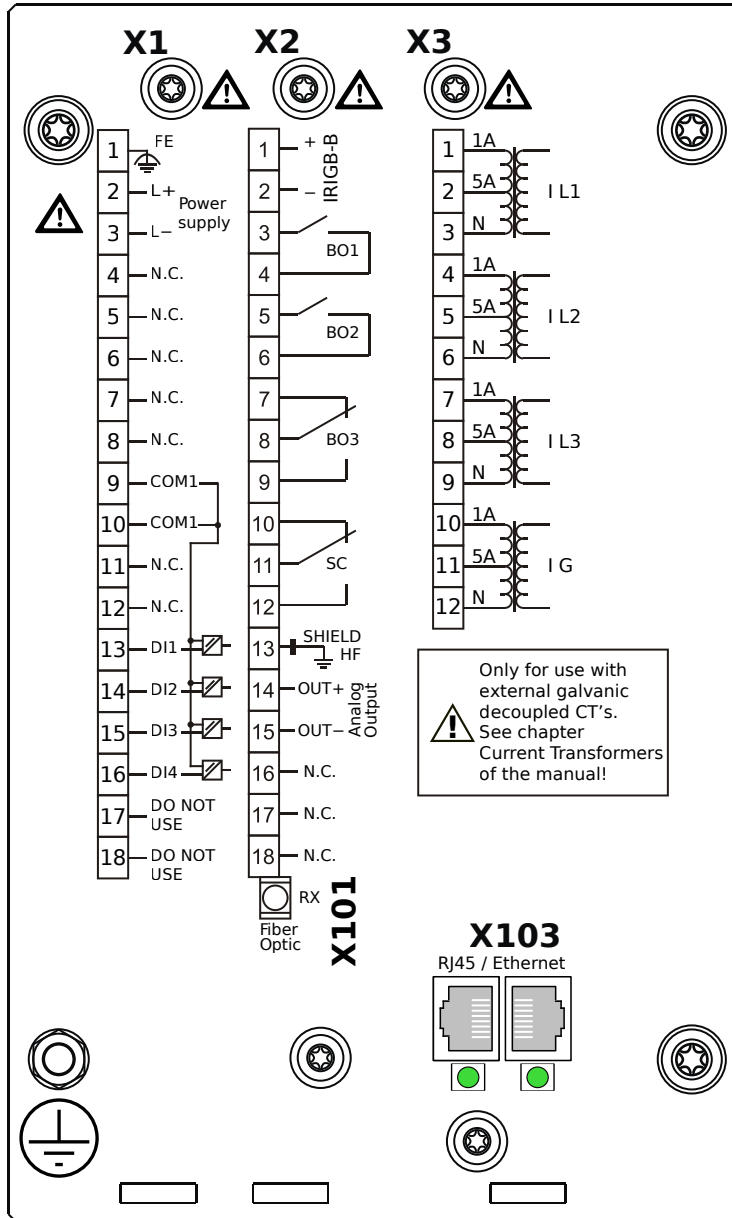

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B0AQA

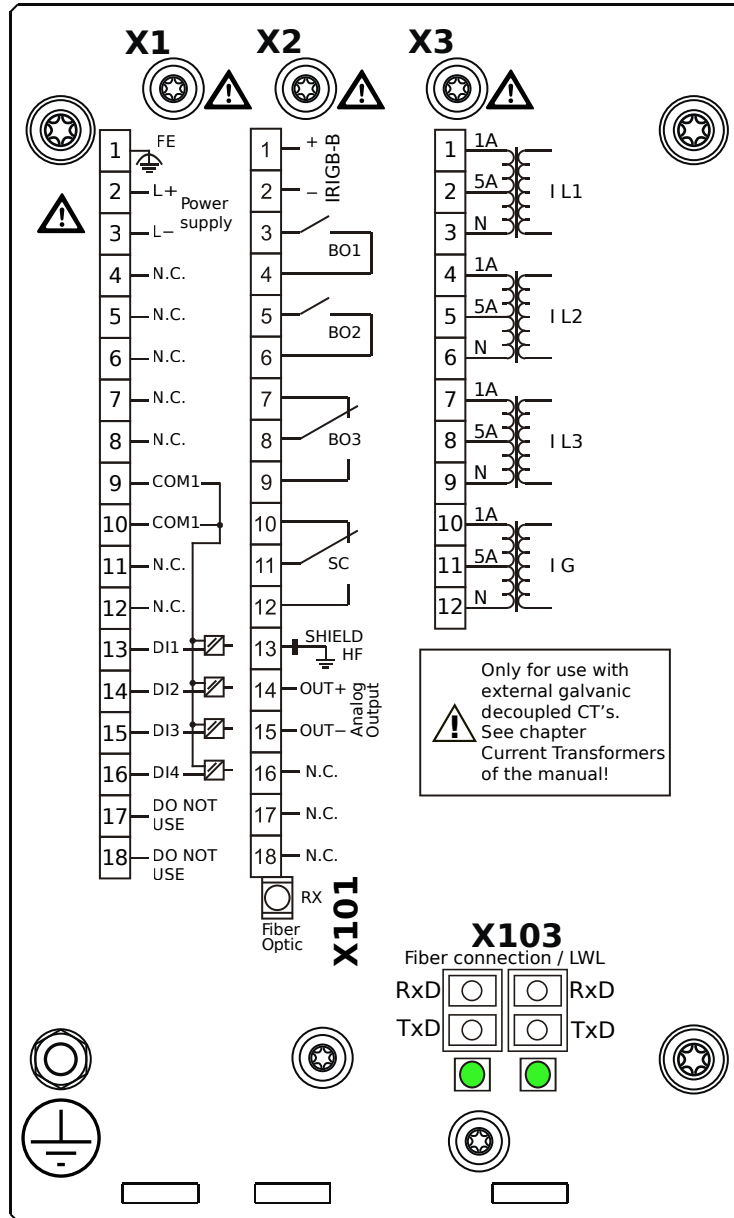

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B0AQB

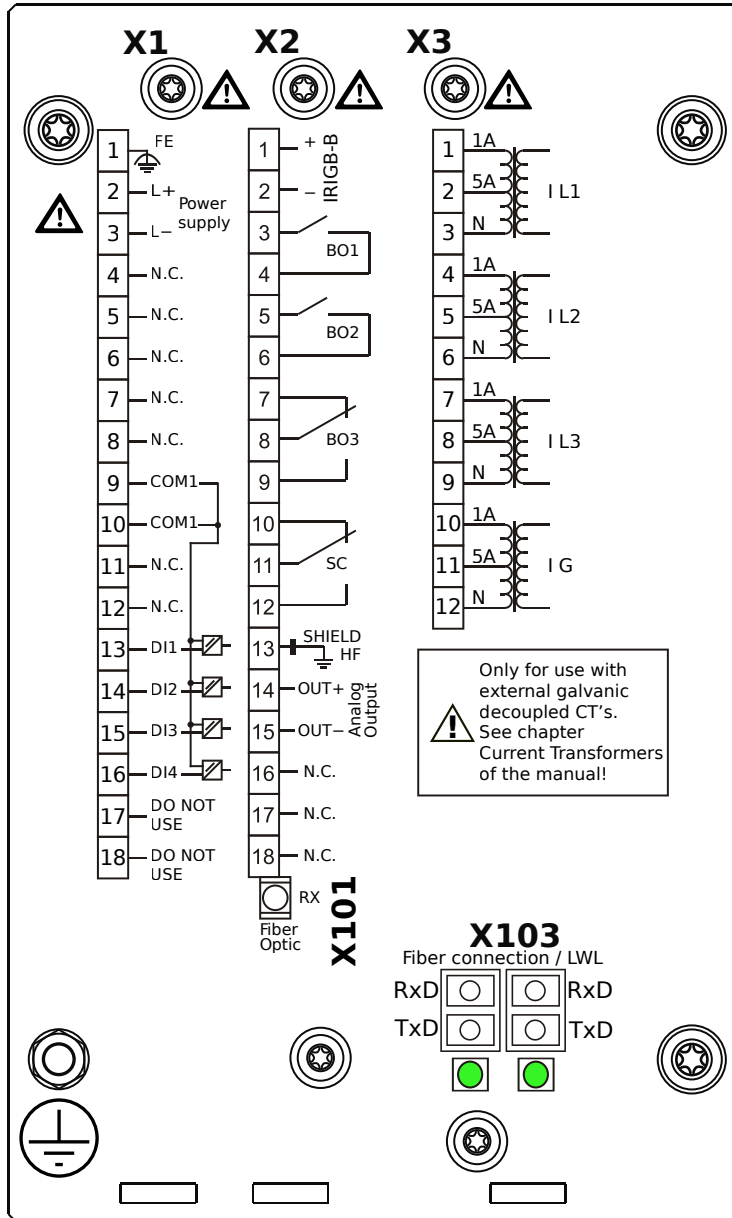

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B0ARA

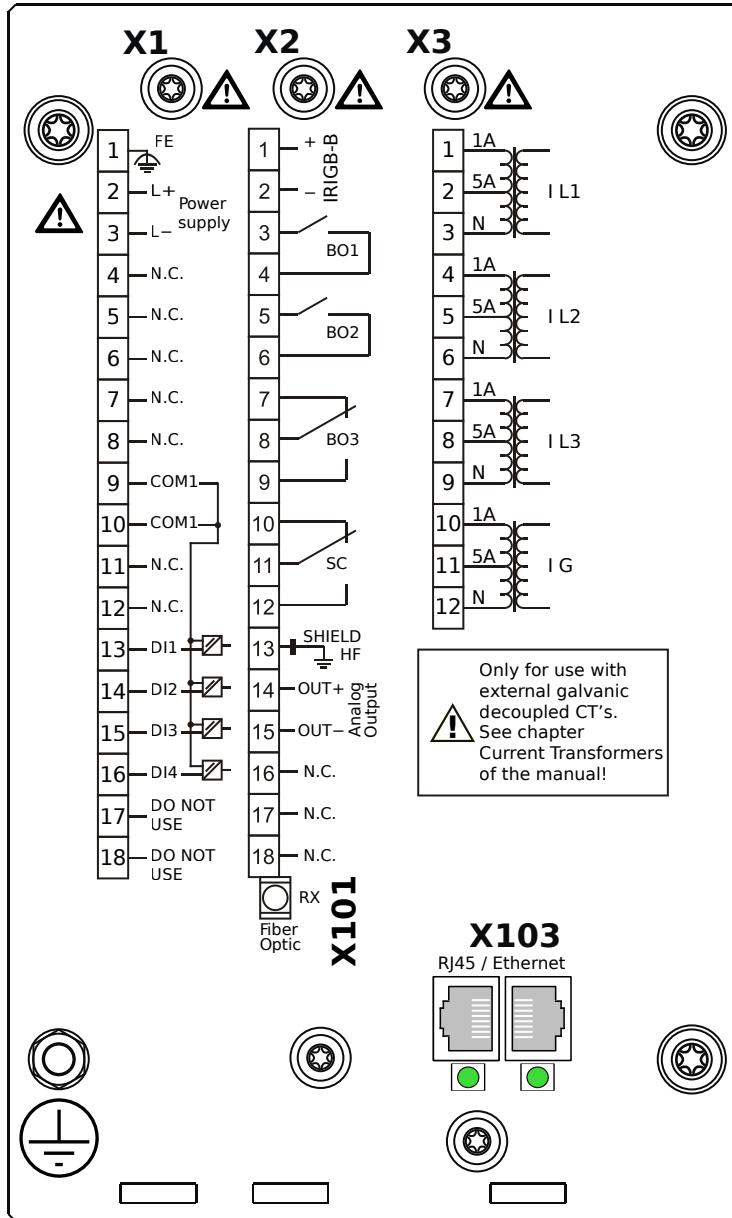

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B0ARB

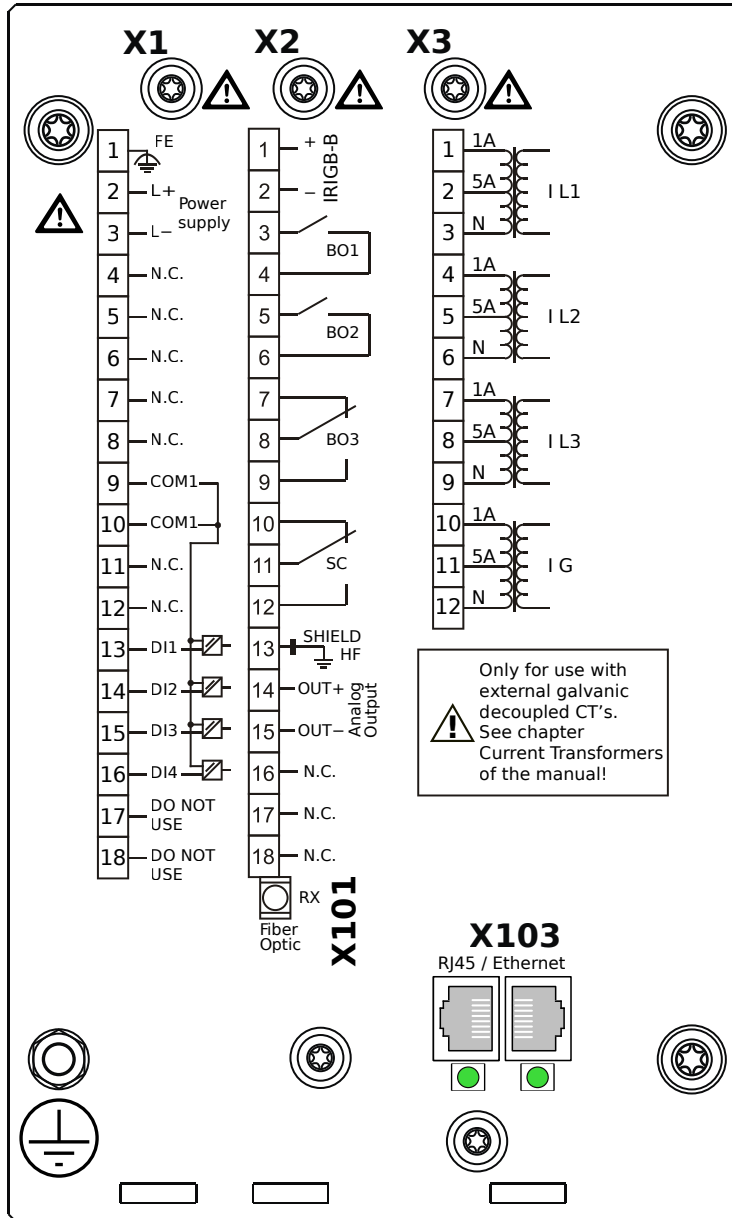

Housing B1, small display, door mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B0ATA

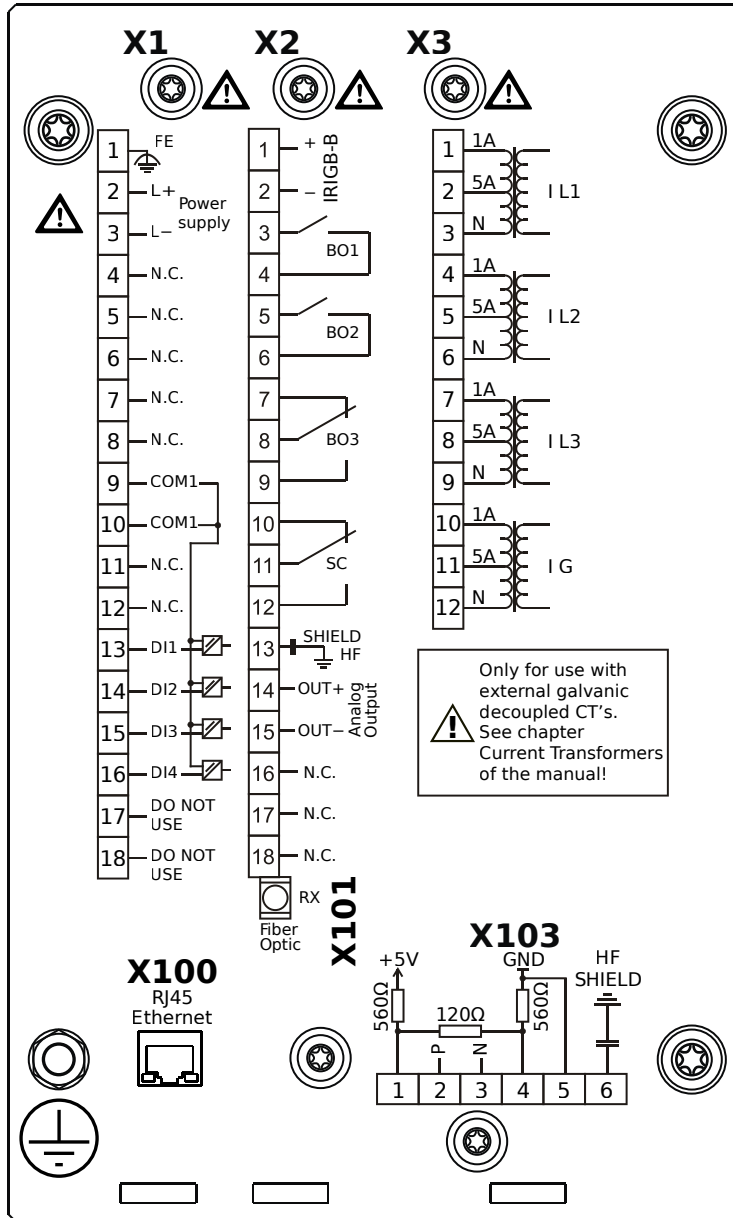

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TI: Standard current measuring card

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B0ATB

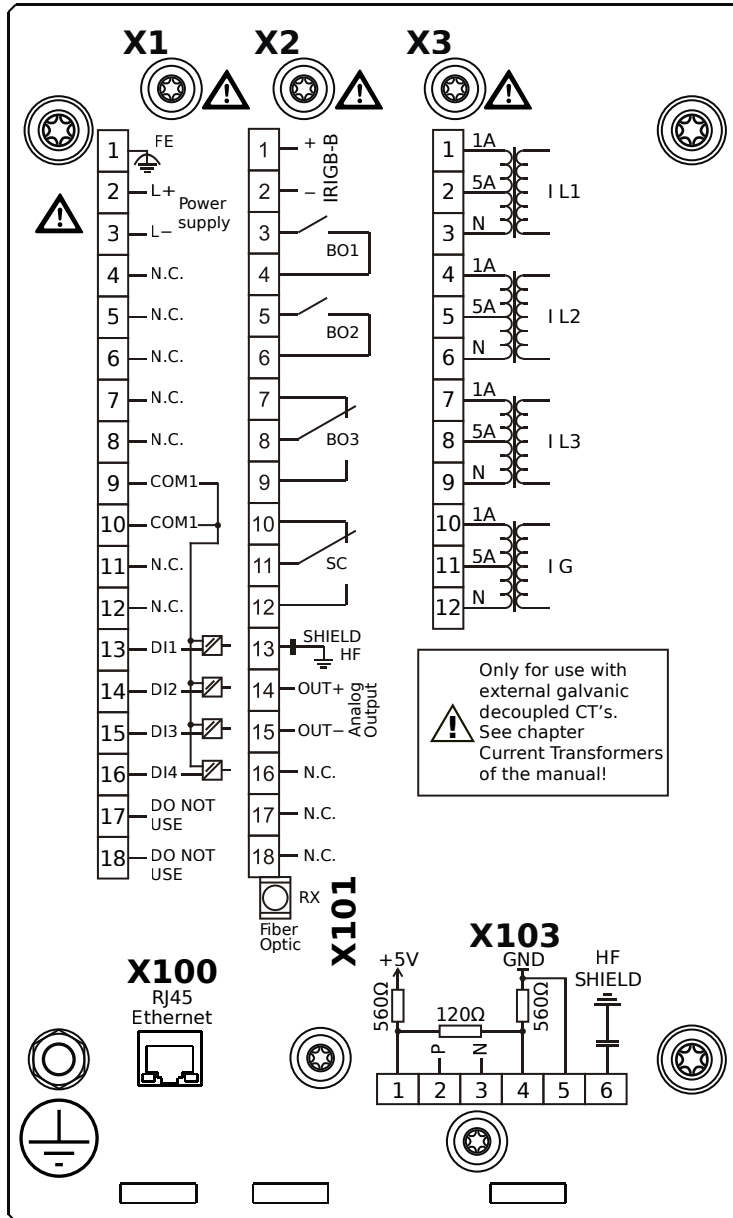

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

IRIG-B

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

X3 – TI: Standard current measuring card


FX)

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B0BAA

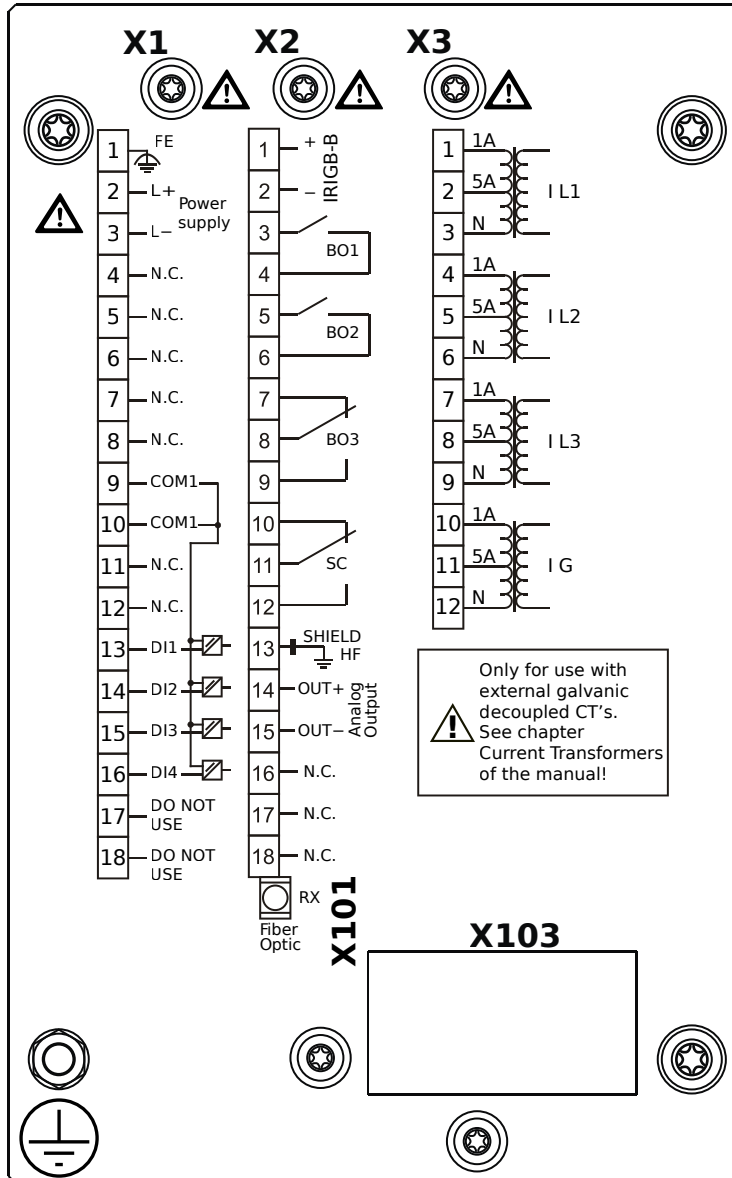

Housing B1, small display, 19" rack mounting


X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0BAB

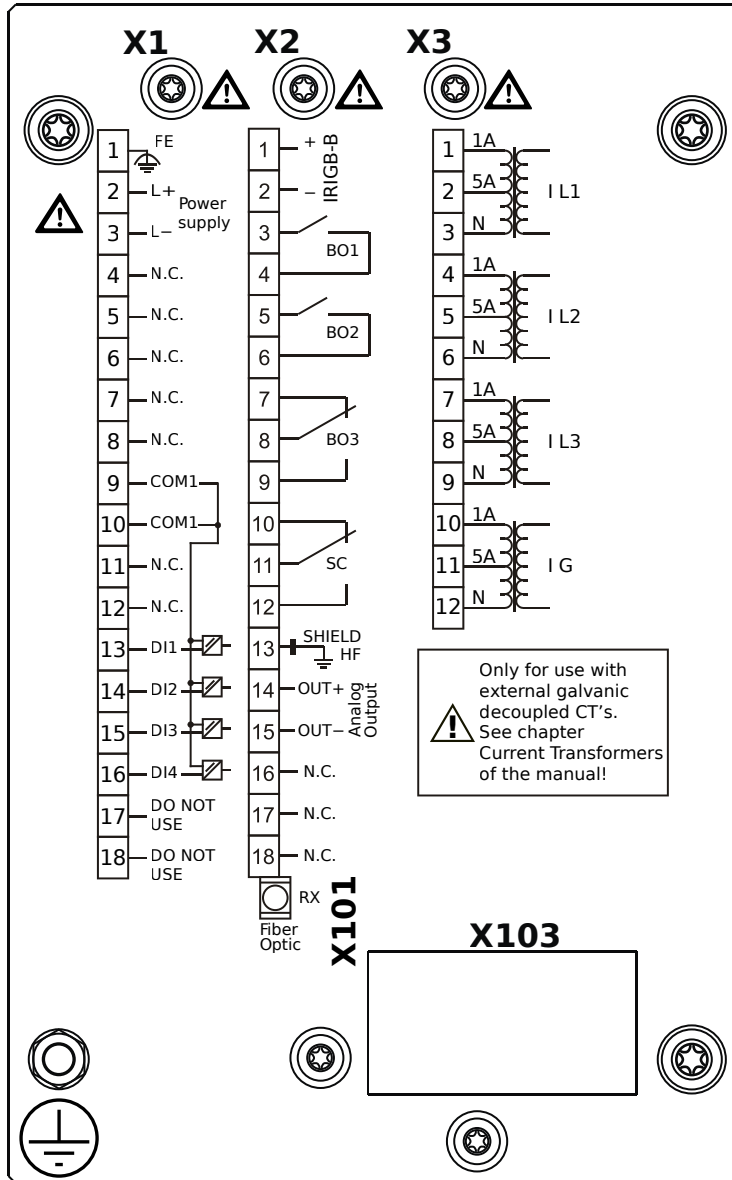

Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)


X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0BBA

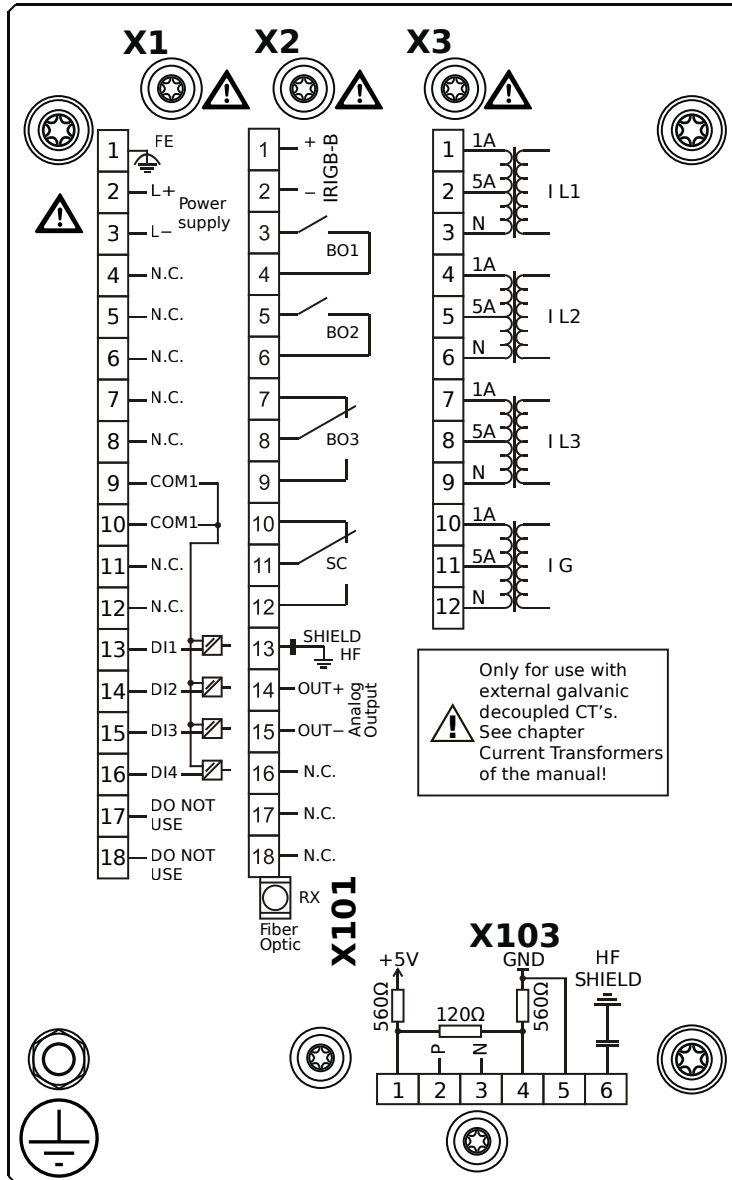

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2B0BBB

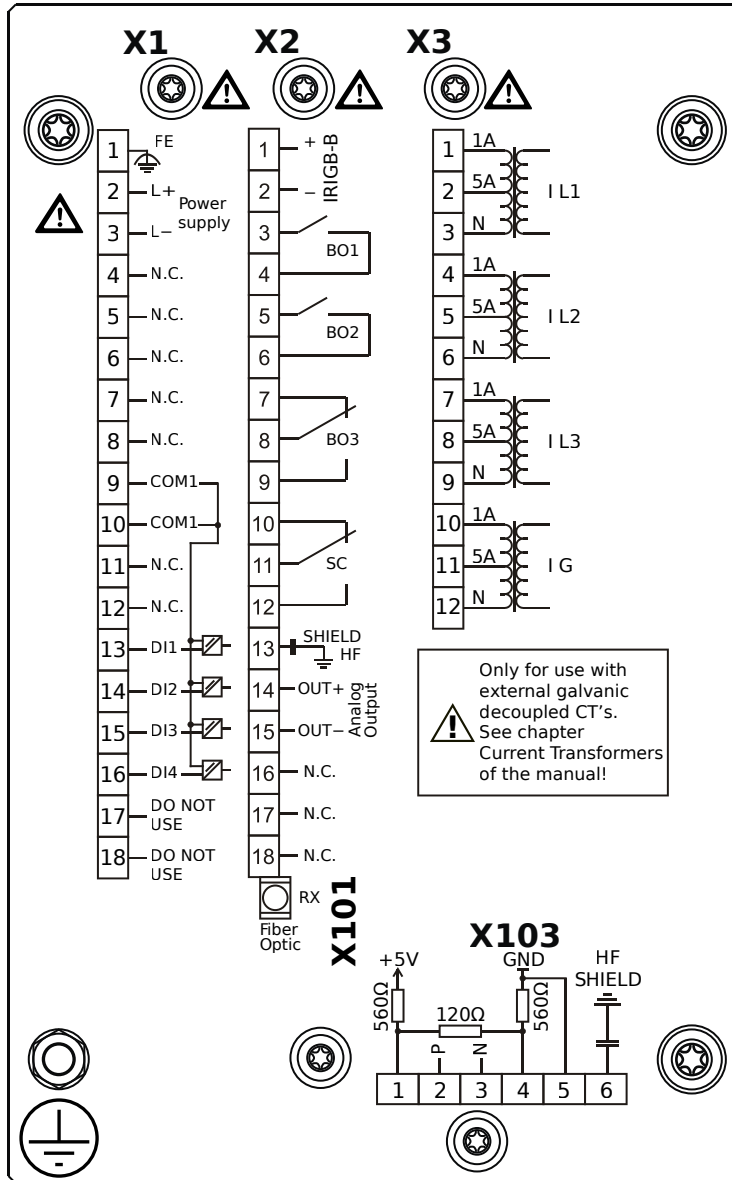

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2B0BCA

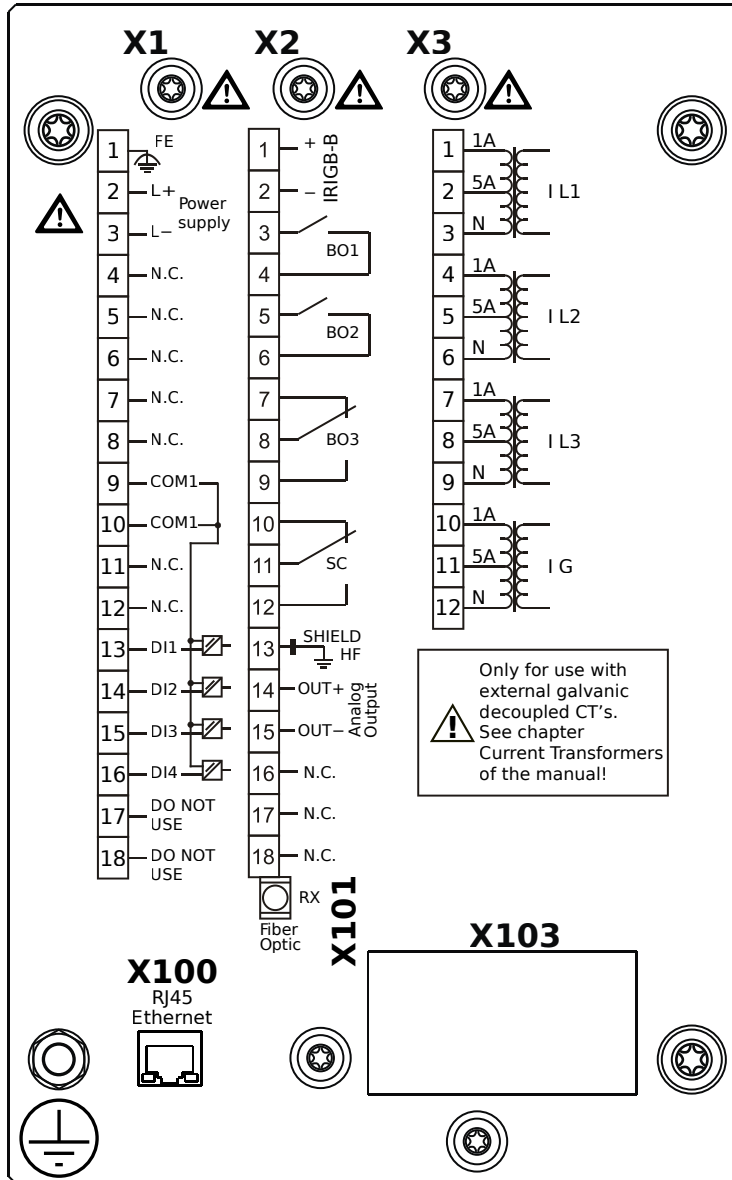

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0BCB

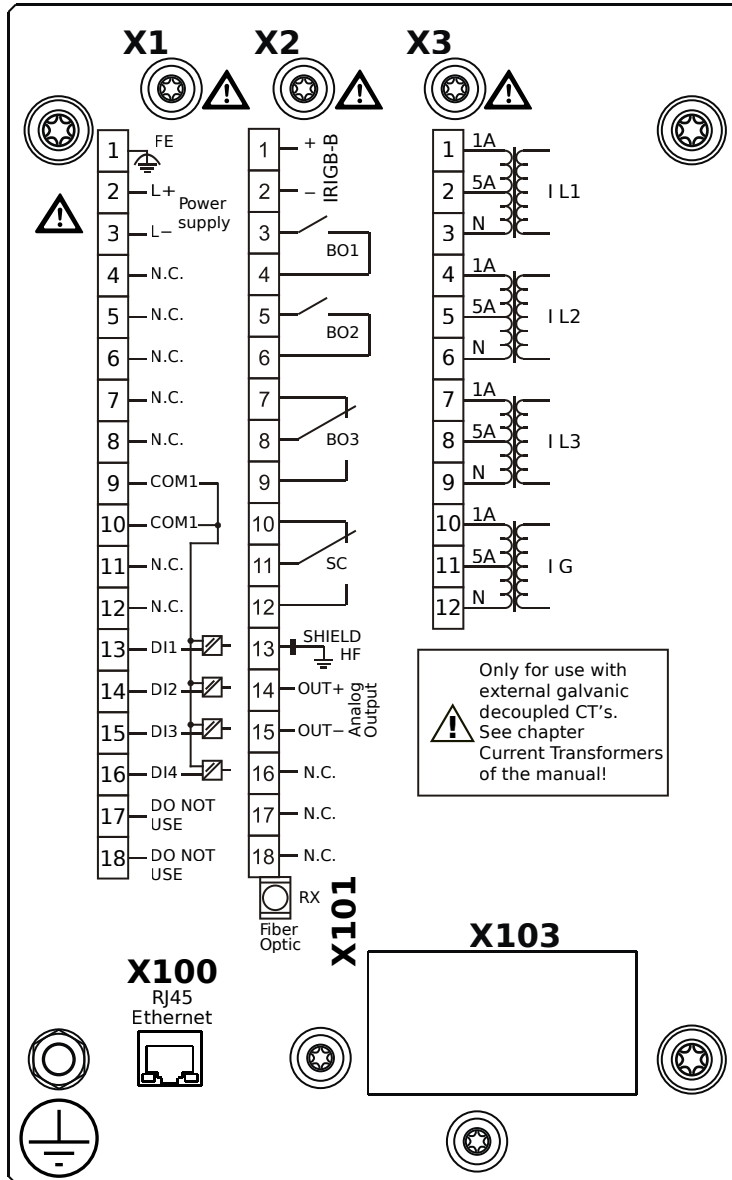

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0BDA

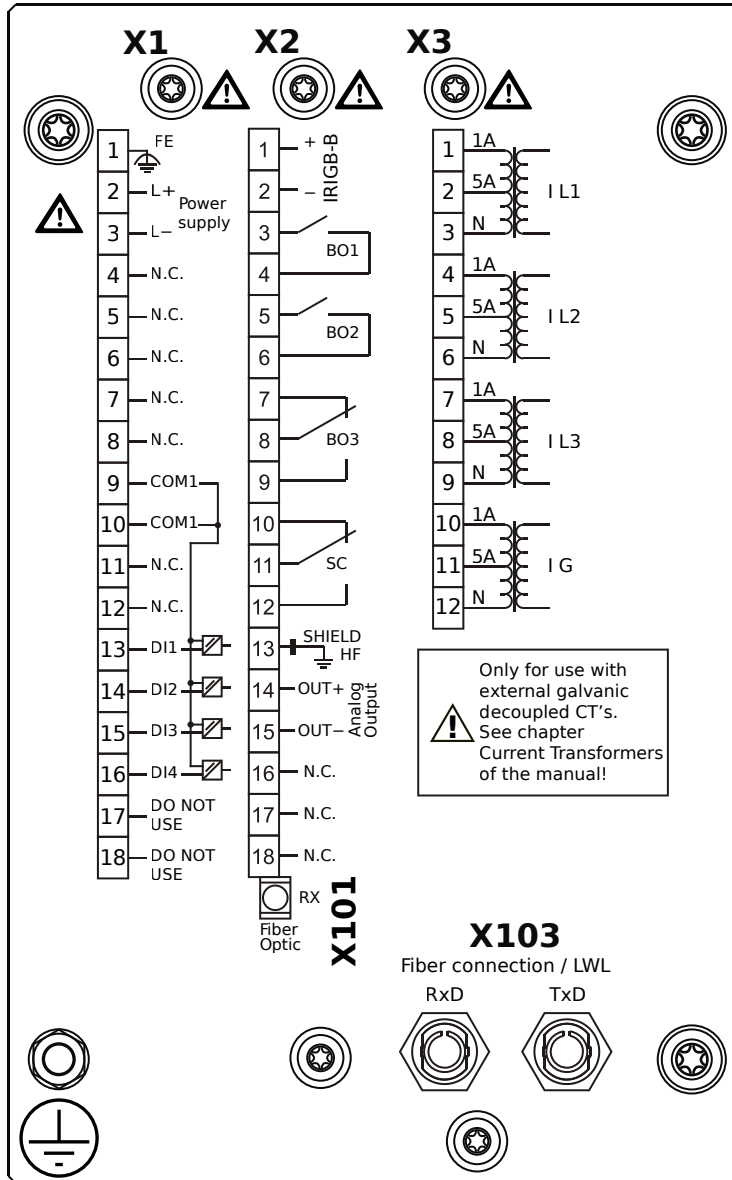

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2B0BDB

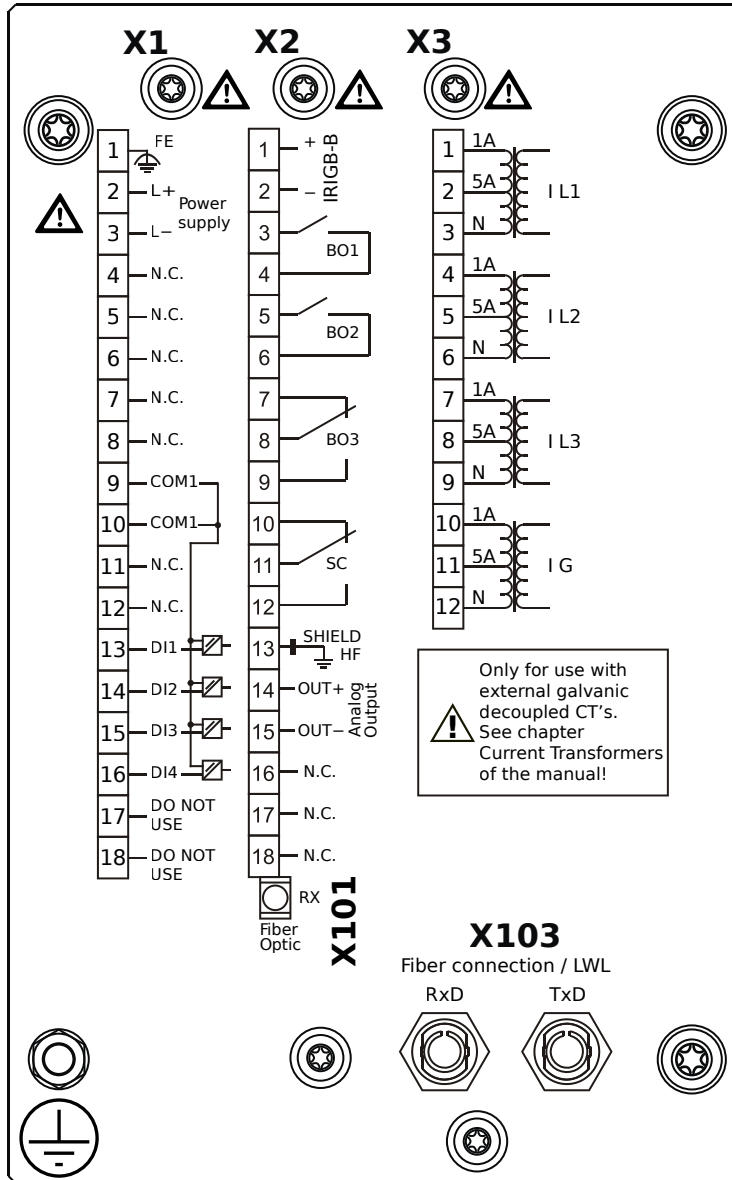

Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2B0BEA

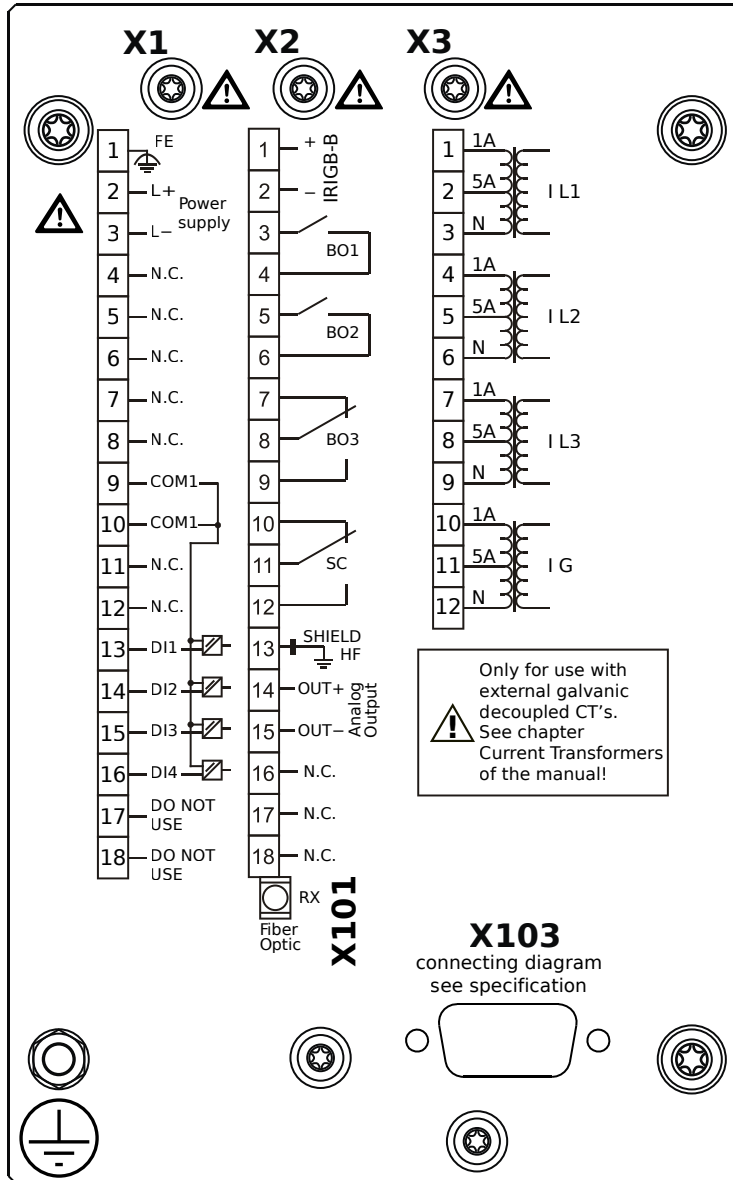

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, RS485, D-SUB

MRM4-2B0BEB

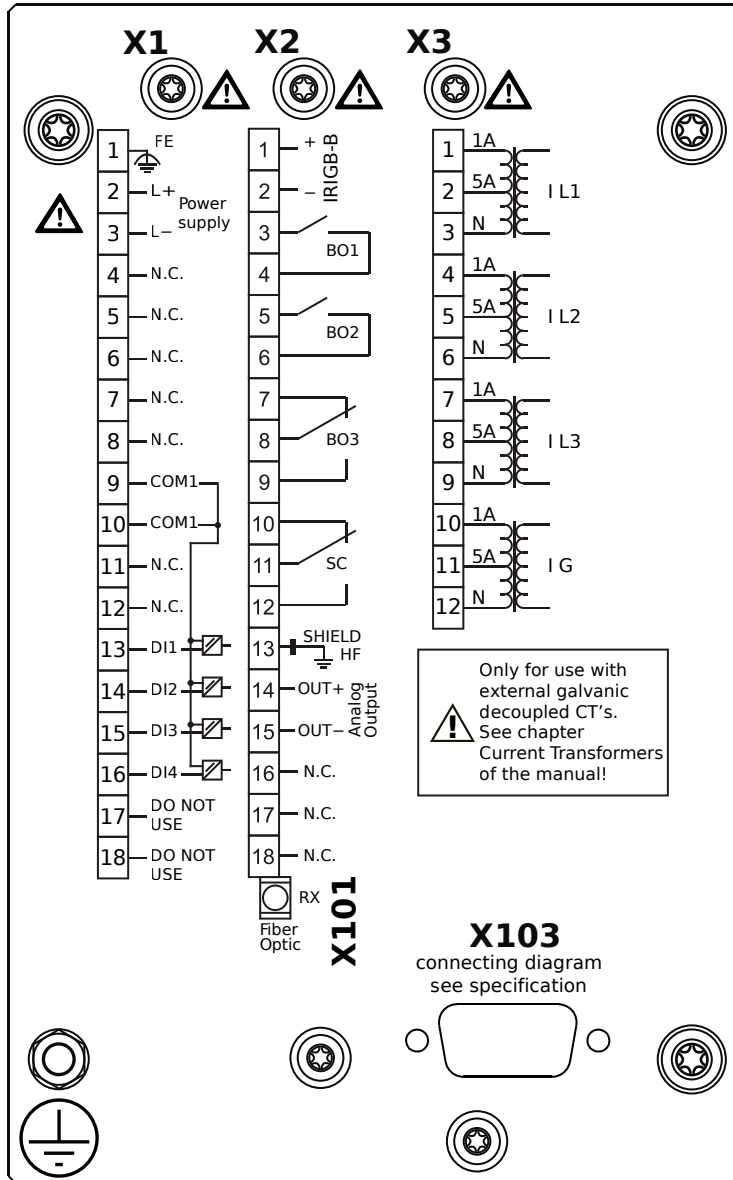

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, RS485, D-SUB


MRM4-2B0BFA

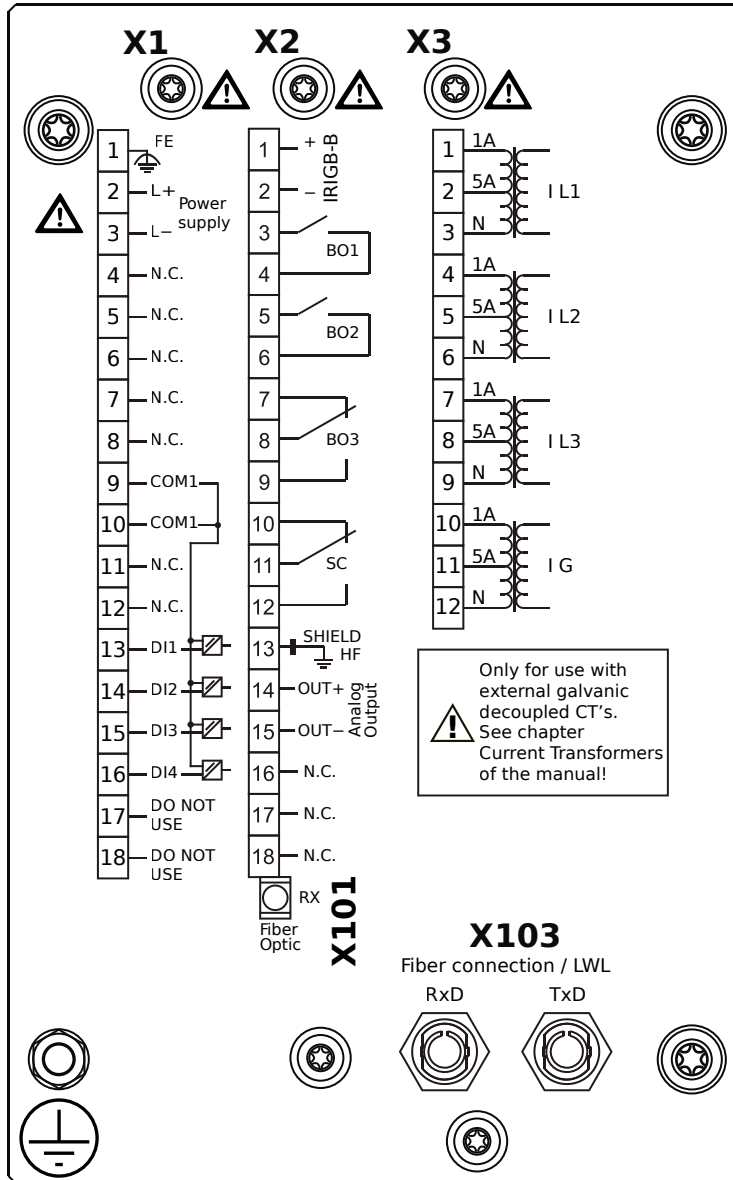

Housing B1, small display, 19" rack mounting

- X1** – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs
- X2** – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B
- X3** – TI: Standard current measuring card
- X101** – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link
- X103** – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2B0BFB

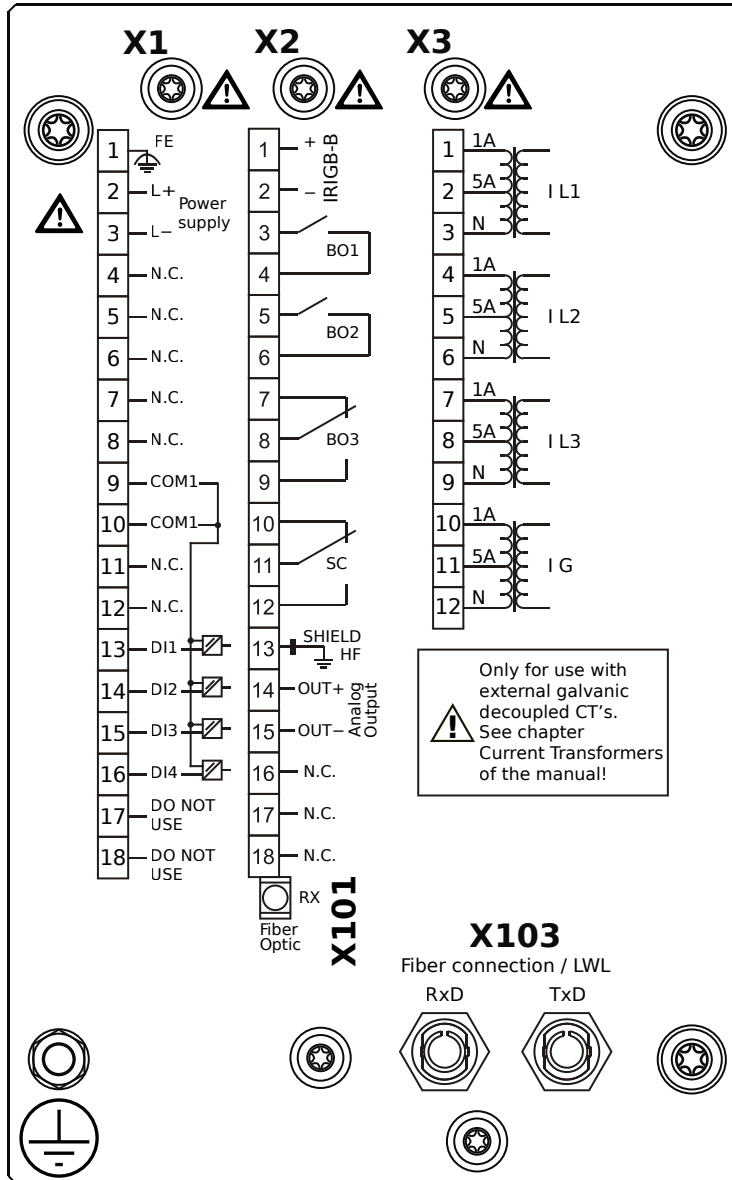

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2B0BGA

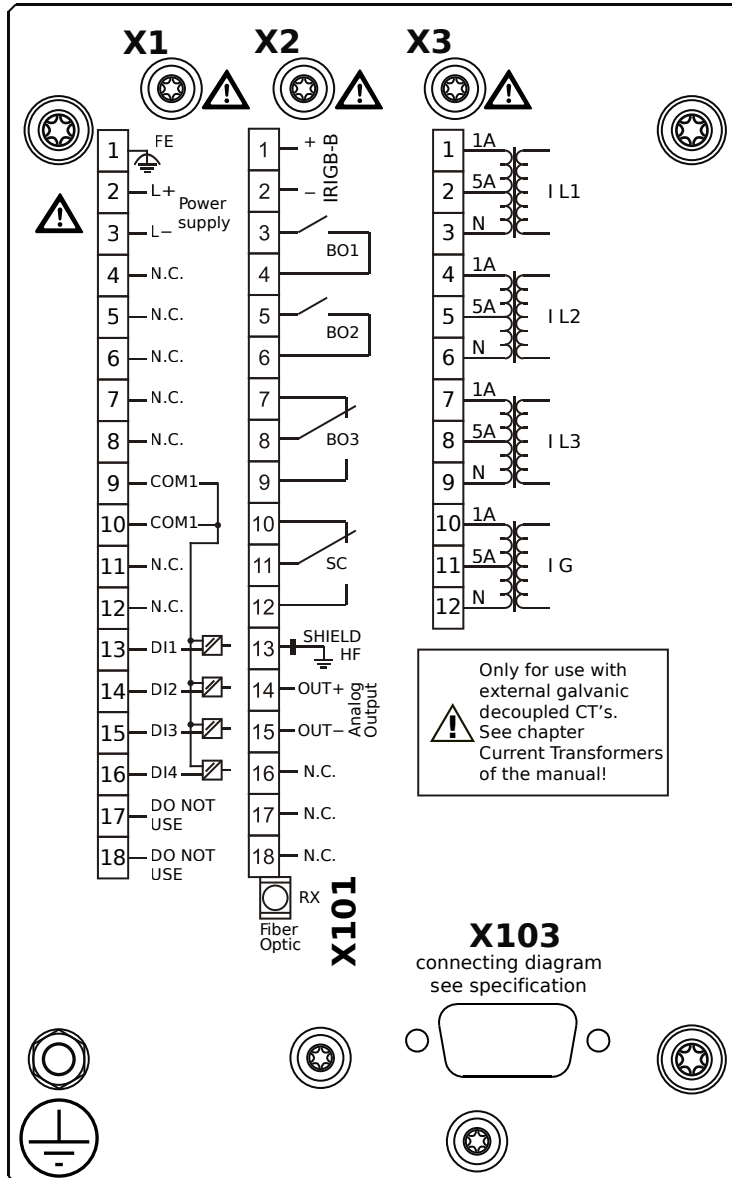

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2B0BGB

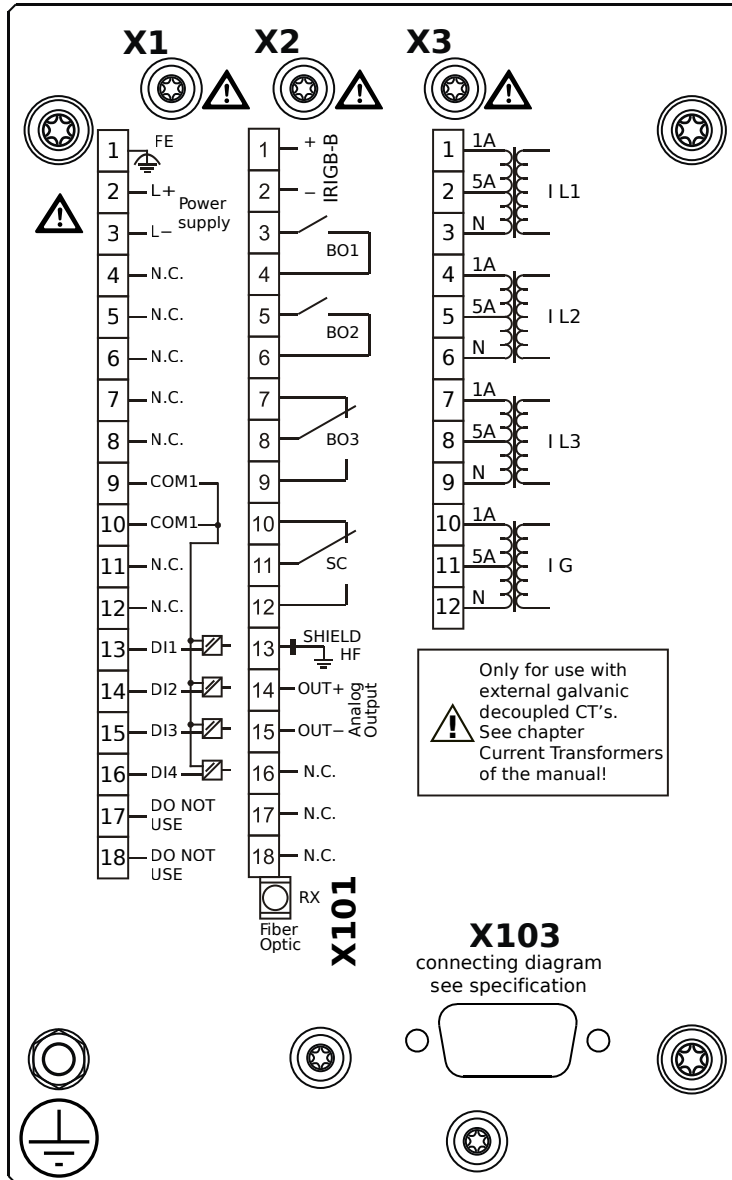

Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2B0BHA

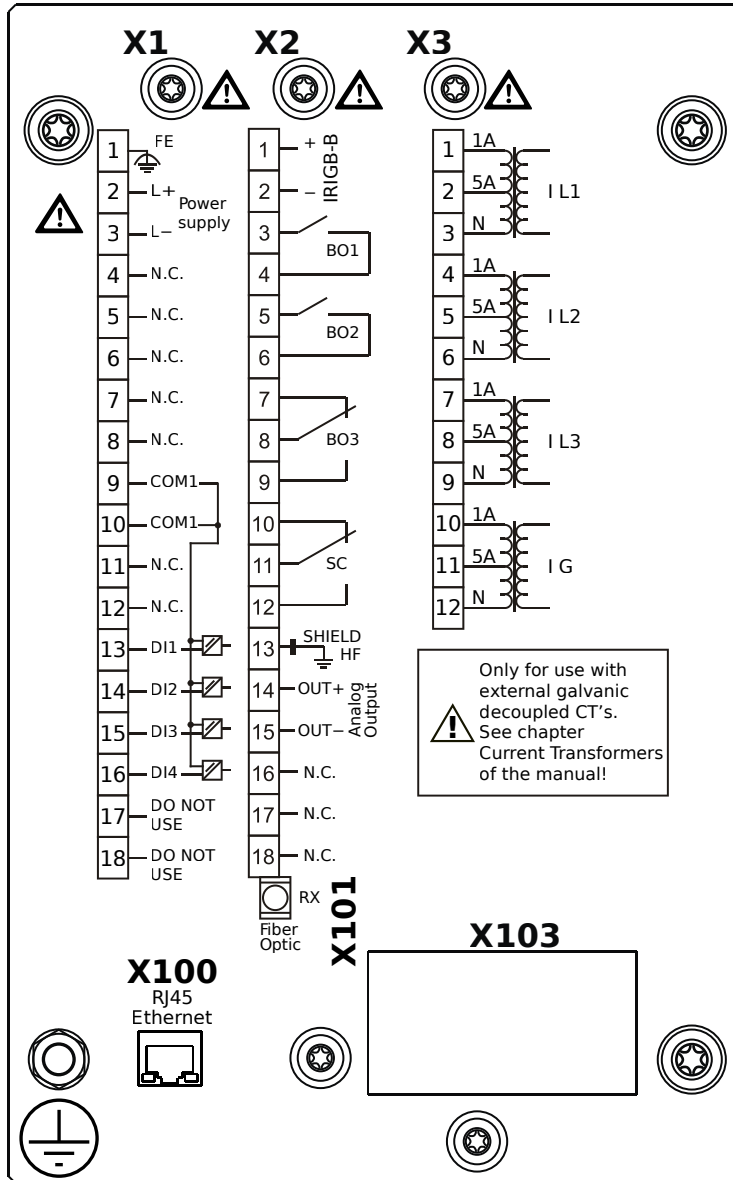

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0BHB

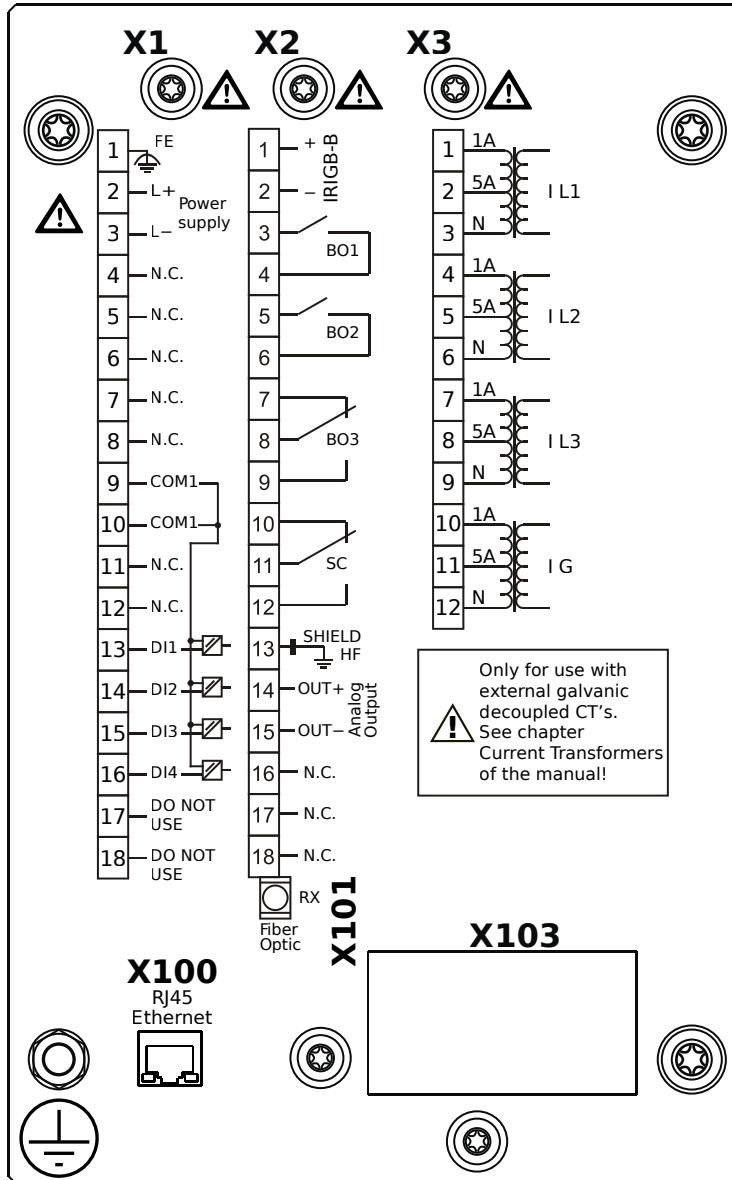

Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

IRIG-B

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


X3 – TI: Standard current measuring card

FX)

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B0BIA

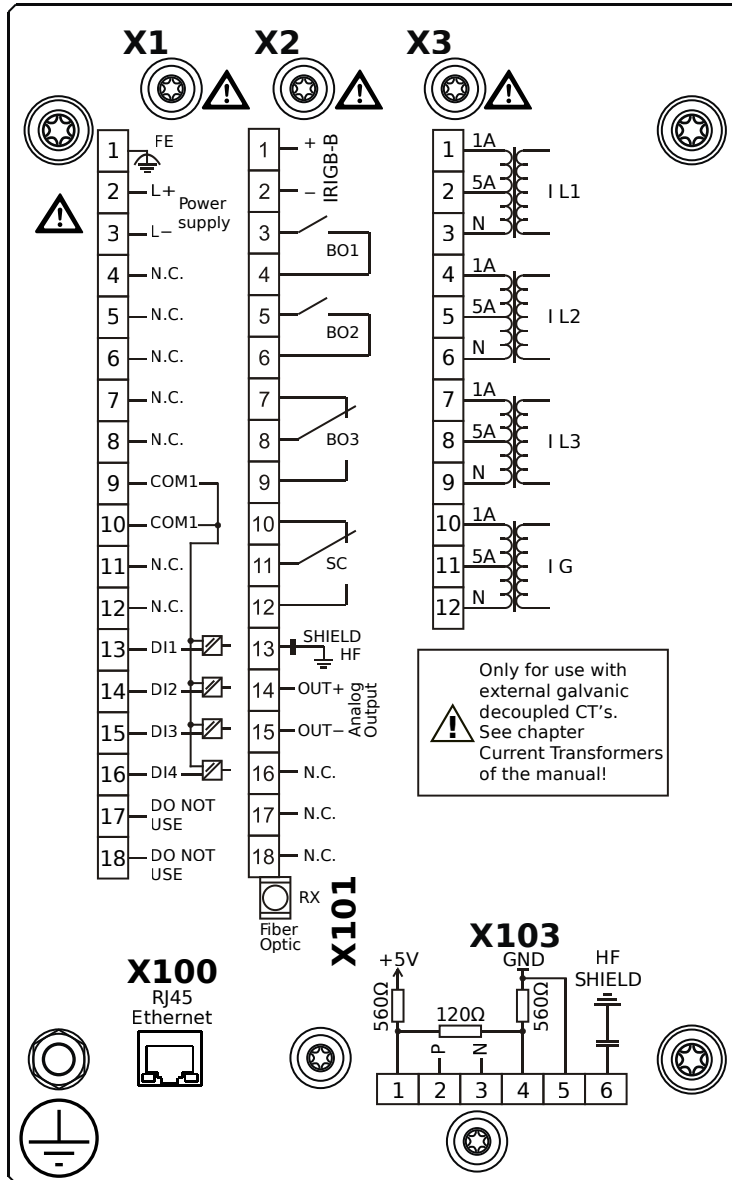

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TI: Standard current measuring card

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B0BIB

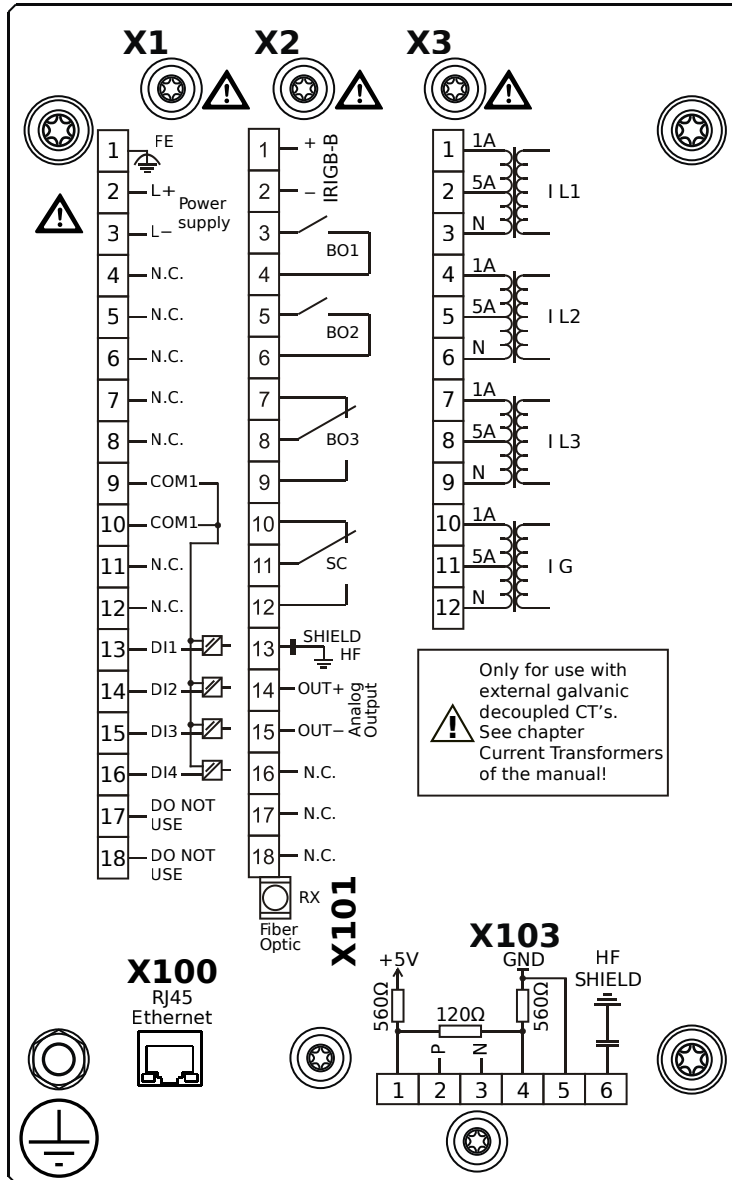

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TI: Standard current measuring card

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B0BKA

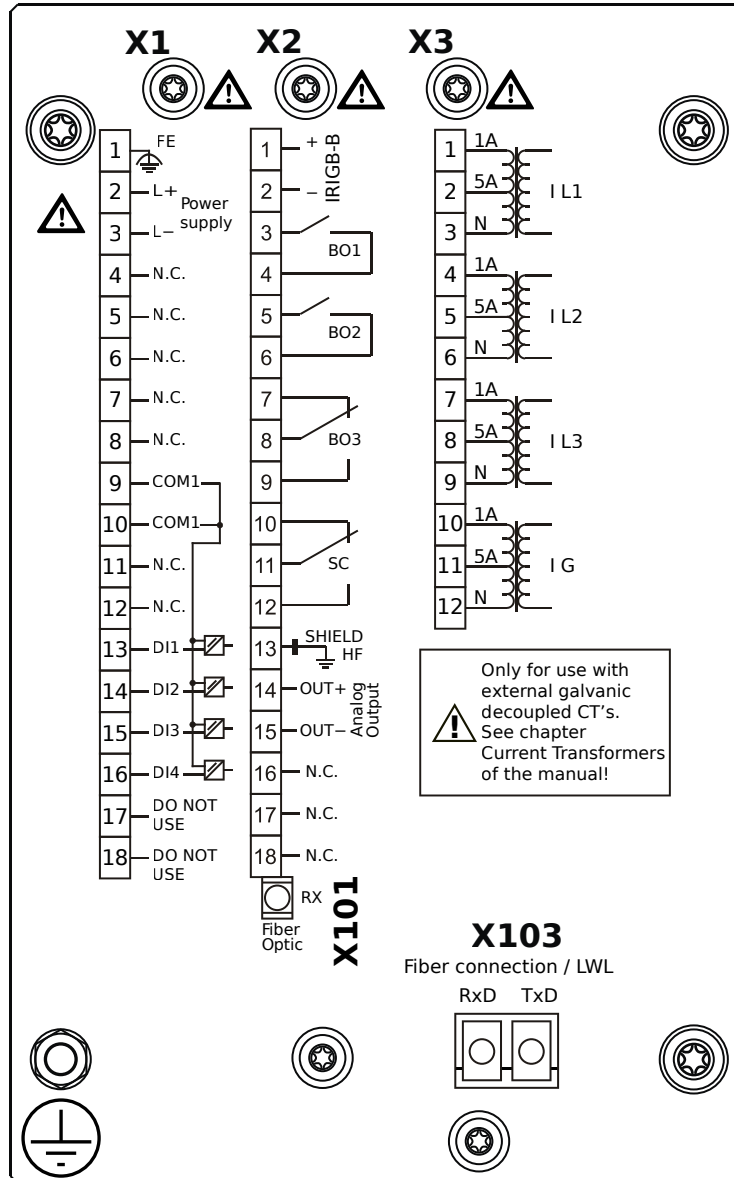

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B0BKB

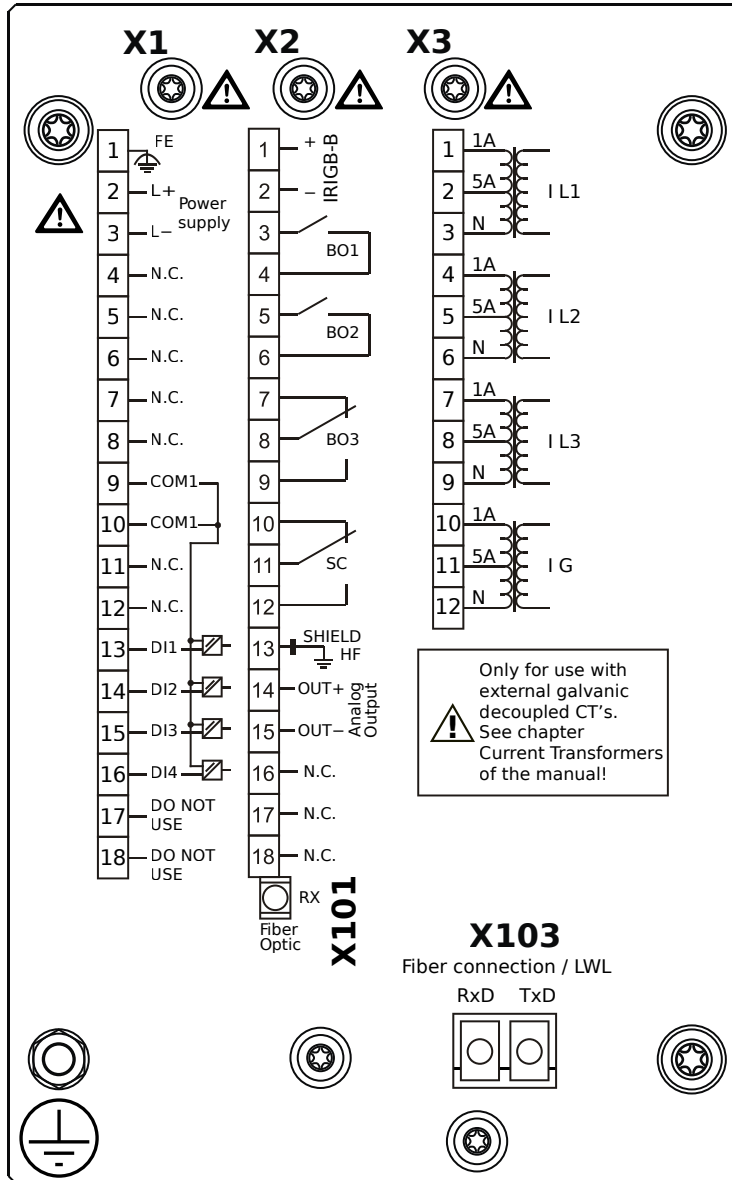

Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B0BLA

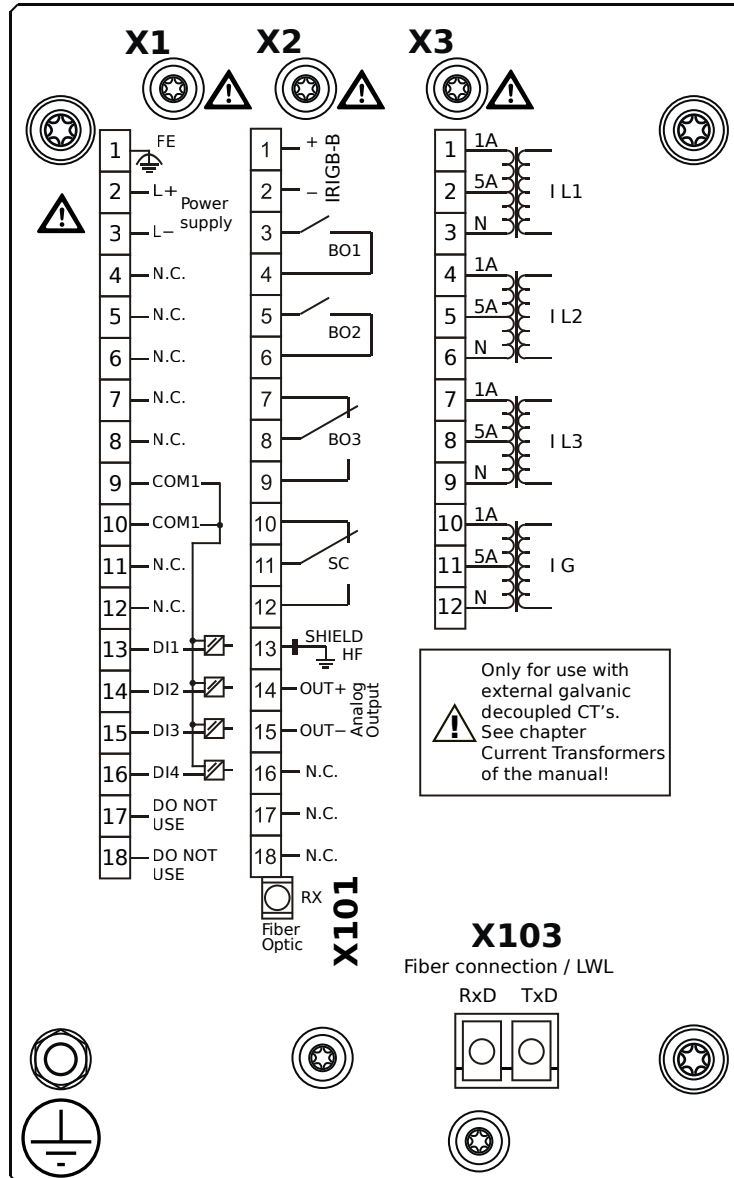

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B0BLB

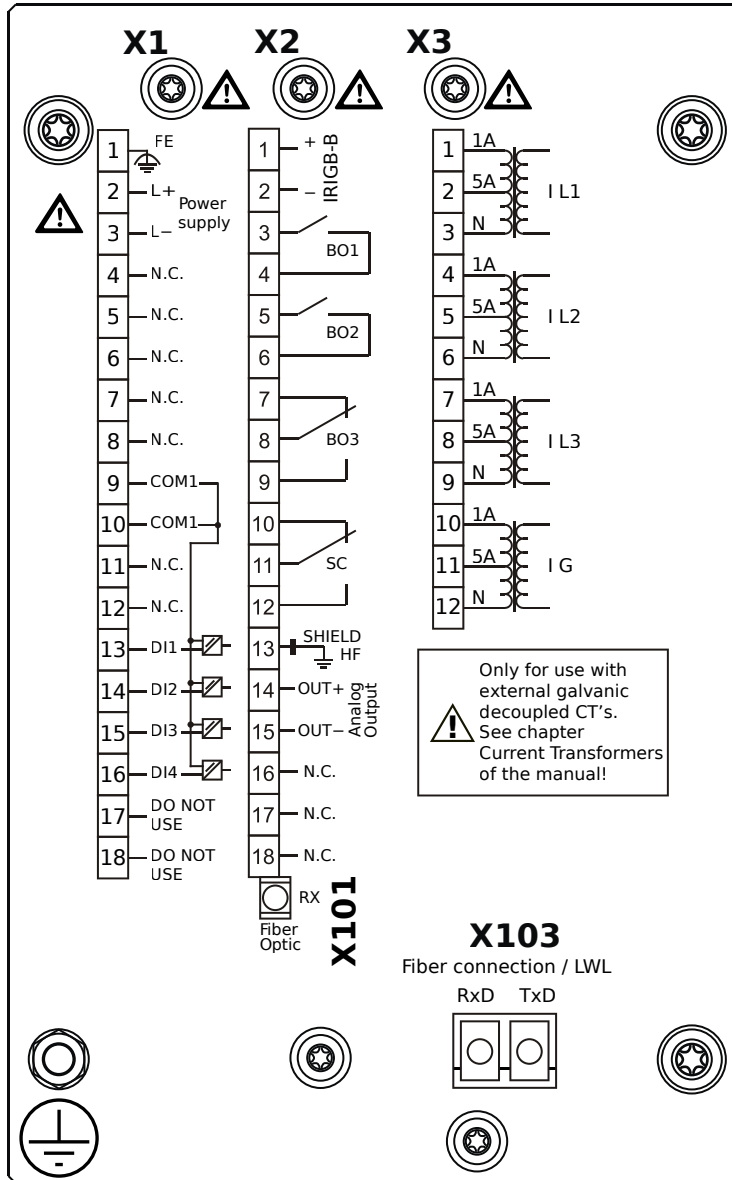

Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B0BOA

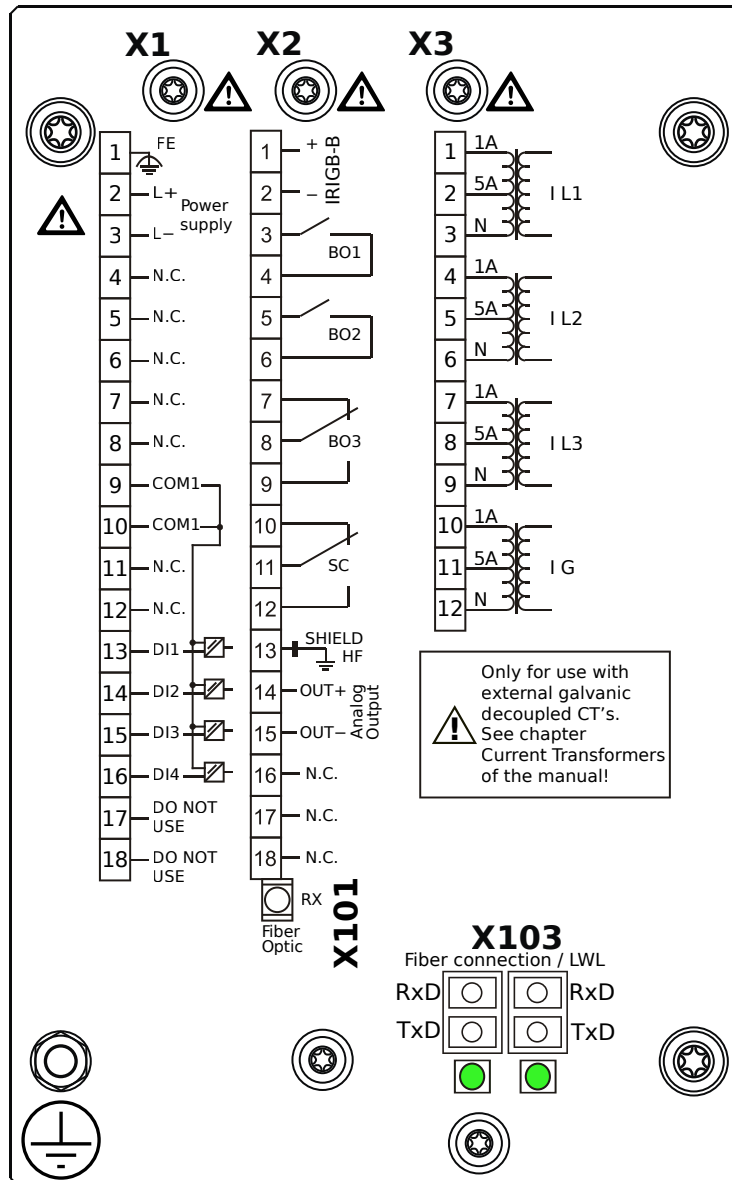

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B0BOB

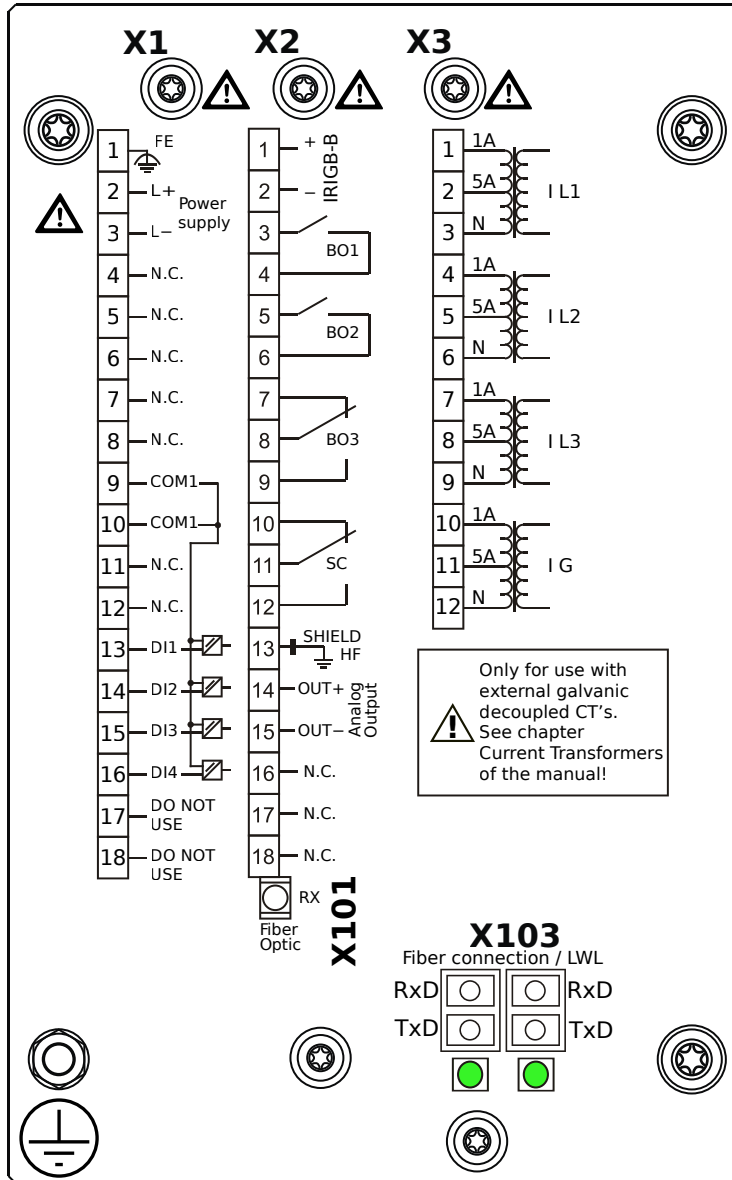

Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B0BPA

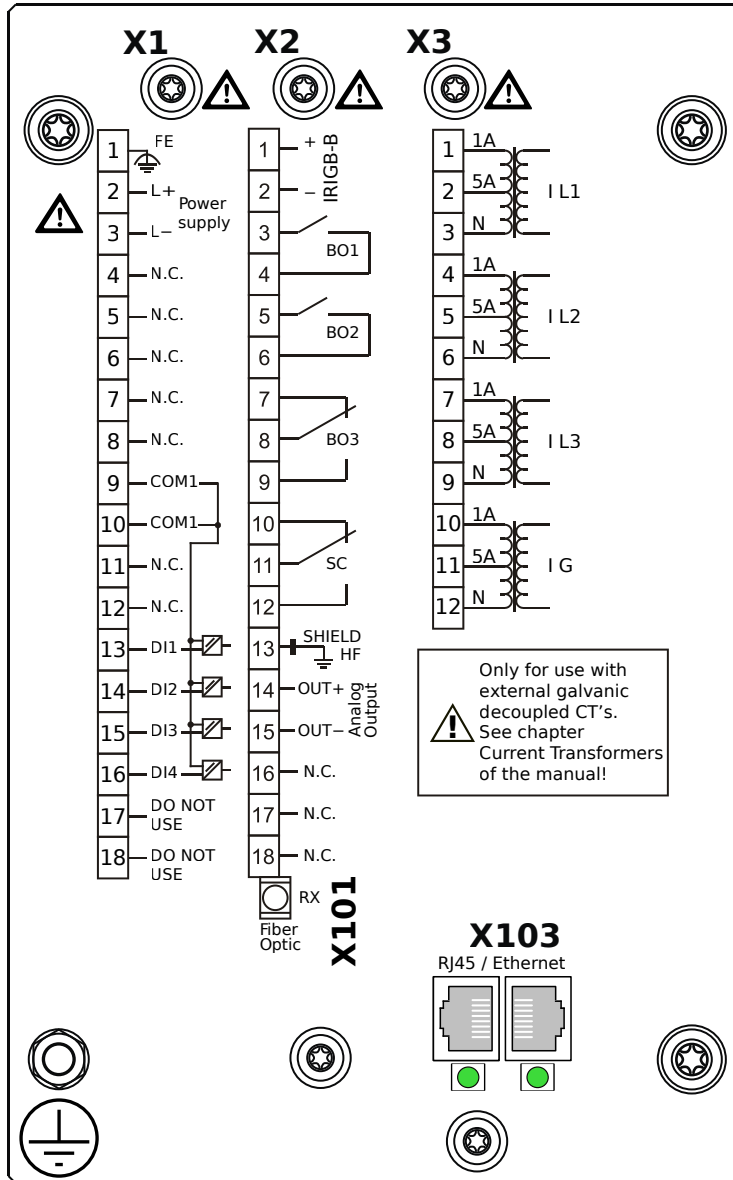

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B0BPB

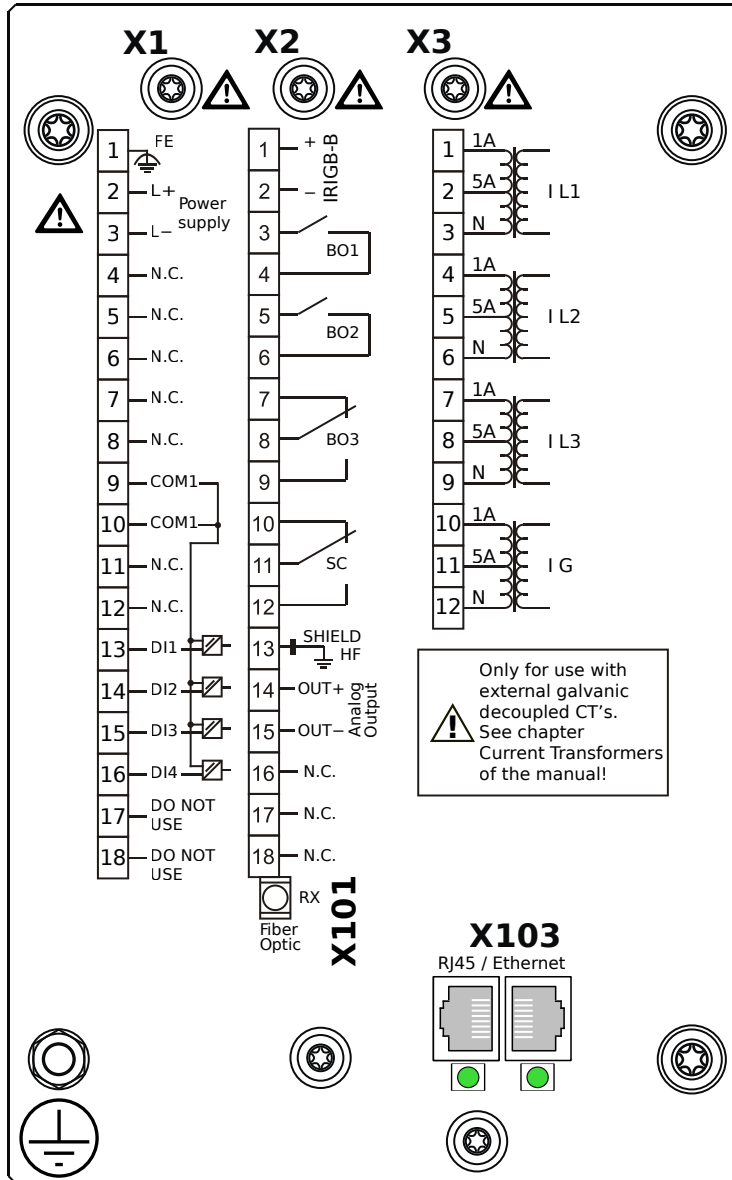

Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B0BQA

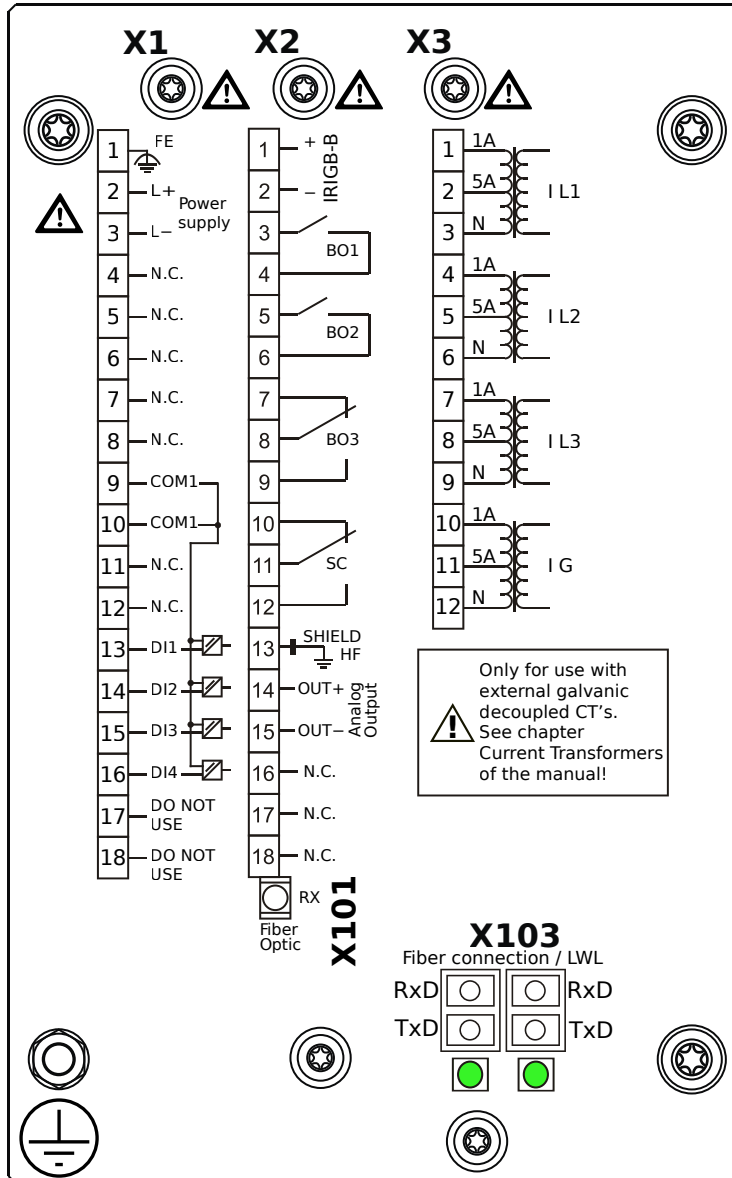

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B0BQB

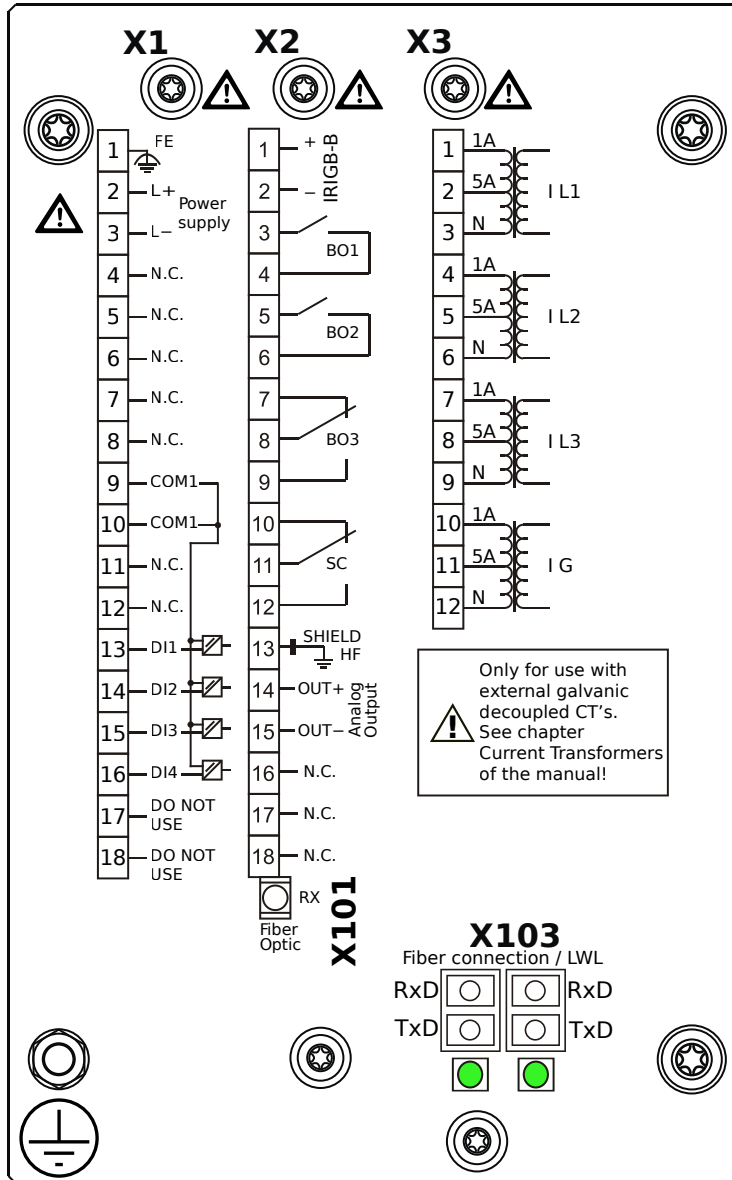

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B0BRA

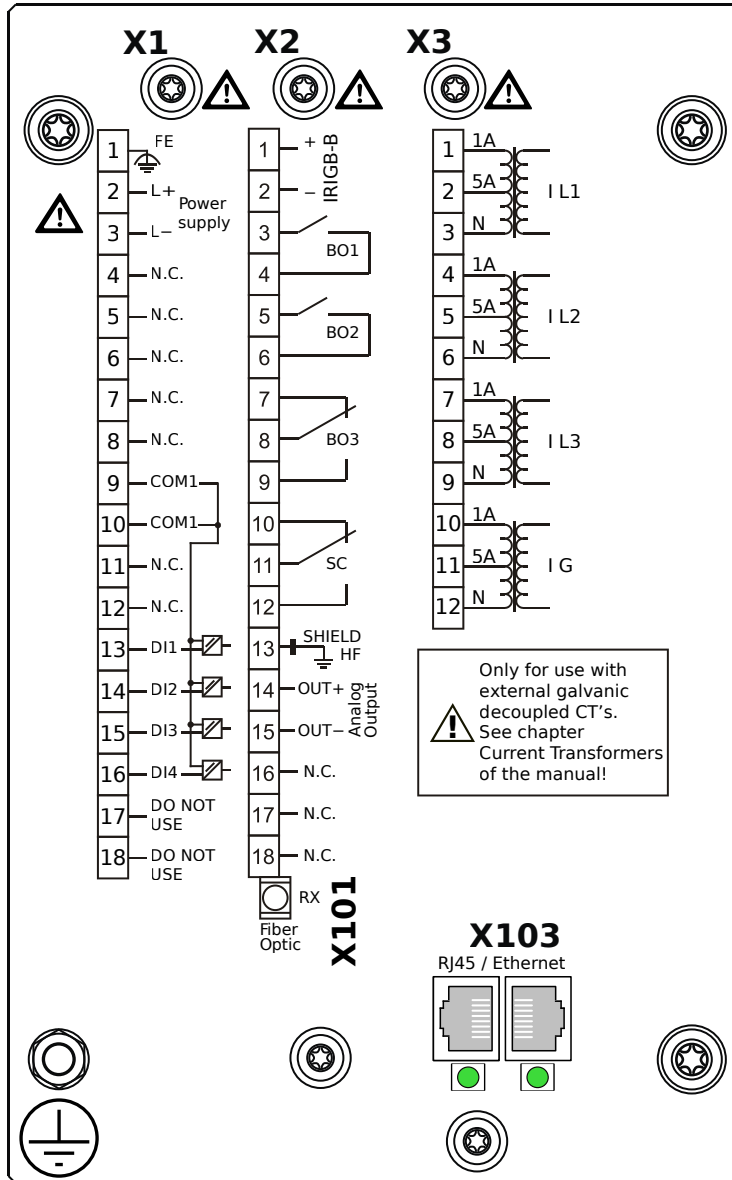

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B0BRB

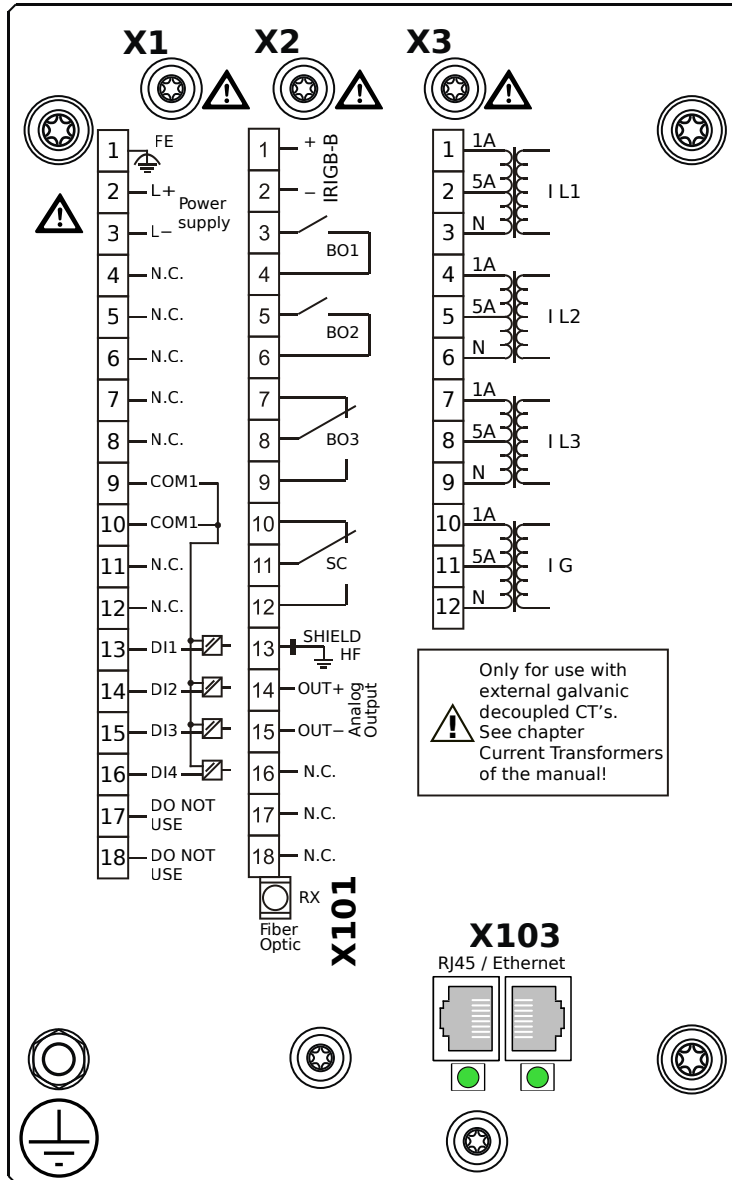

Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TI: Standard current measuring card

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B0BTA

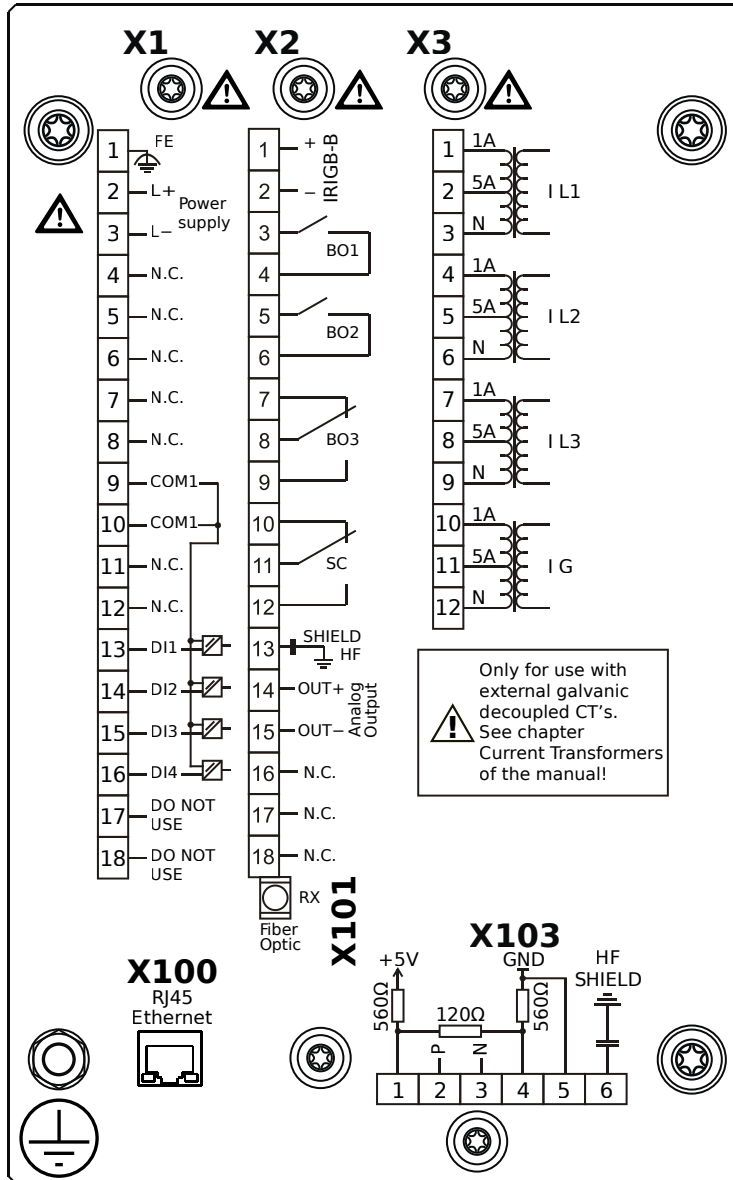

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TI: Standard current measuring card

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B0BTB

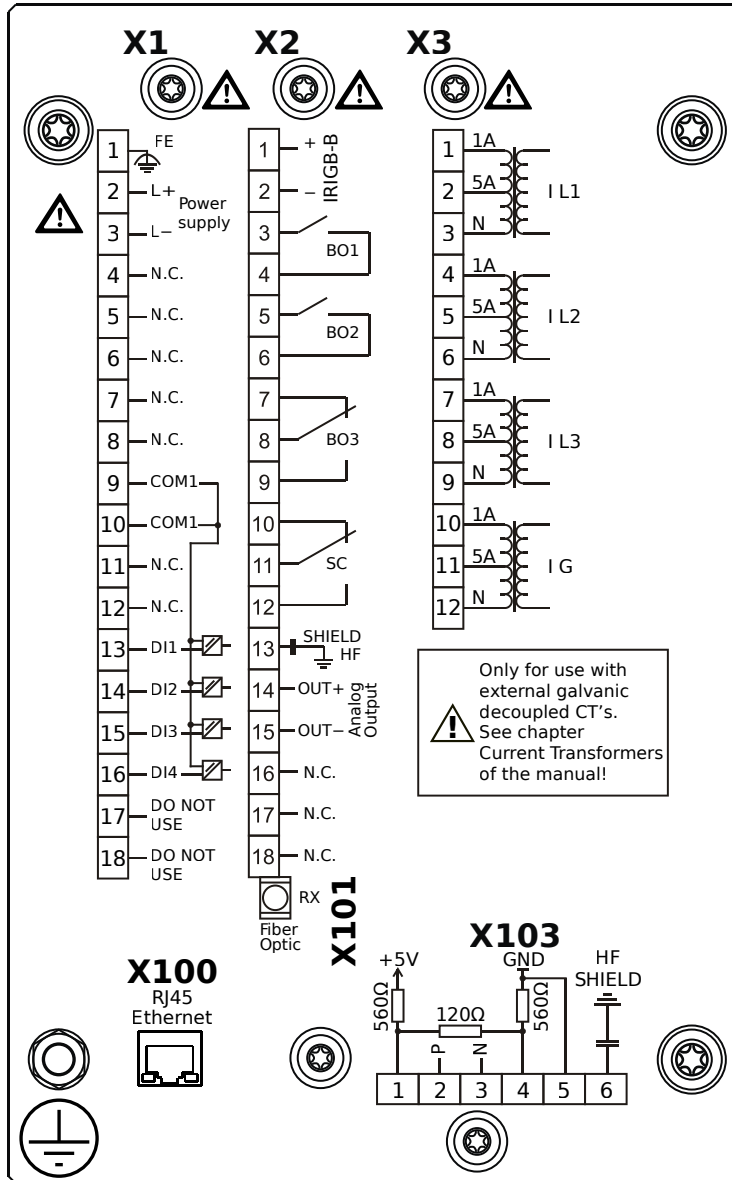

Housing B1, small display, 19" rack mounting

- + Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

IRIG-B

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

X3 – TI: Standard current measuring card


FX)

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B1AAA

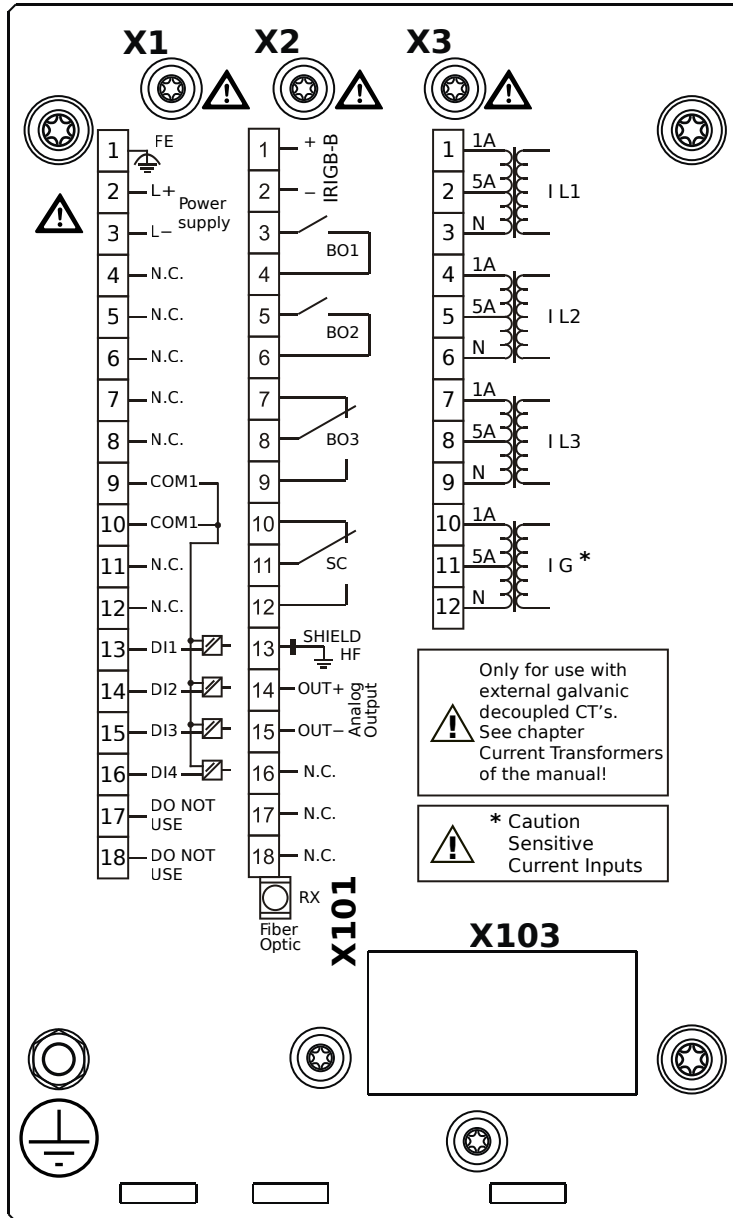

Housing B1, small display, door mounting


X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1AAB

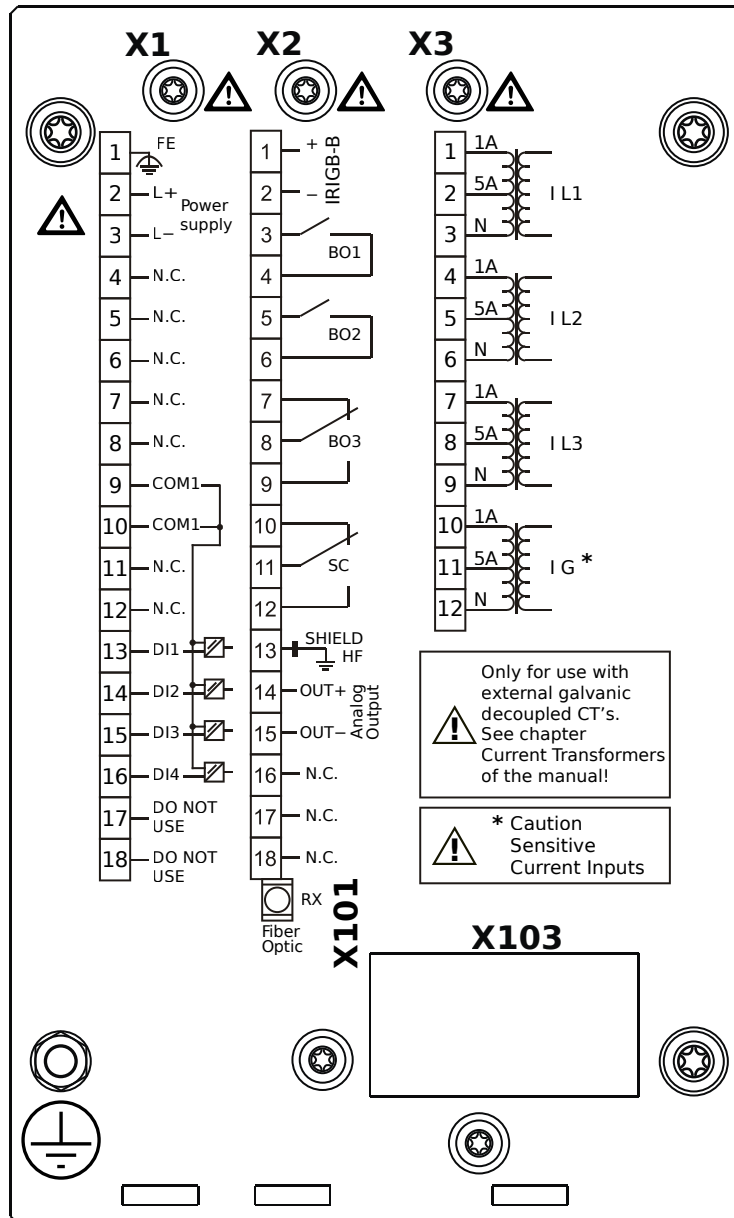

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1ABA

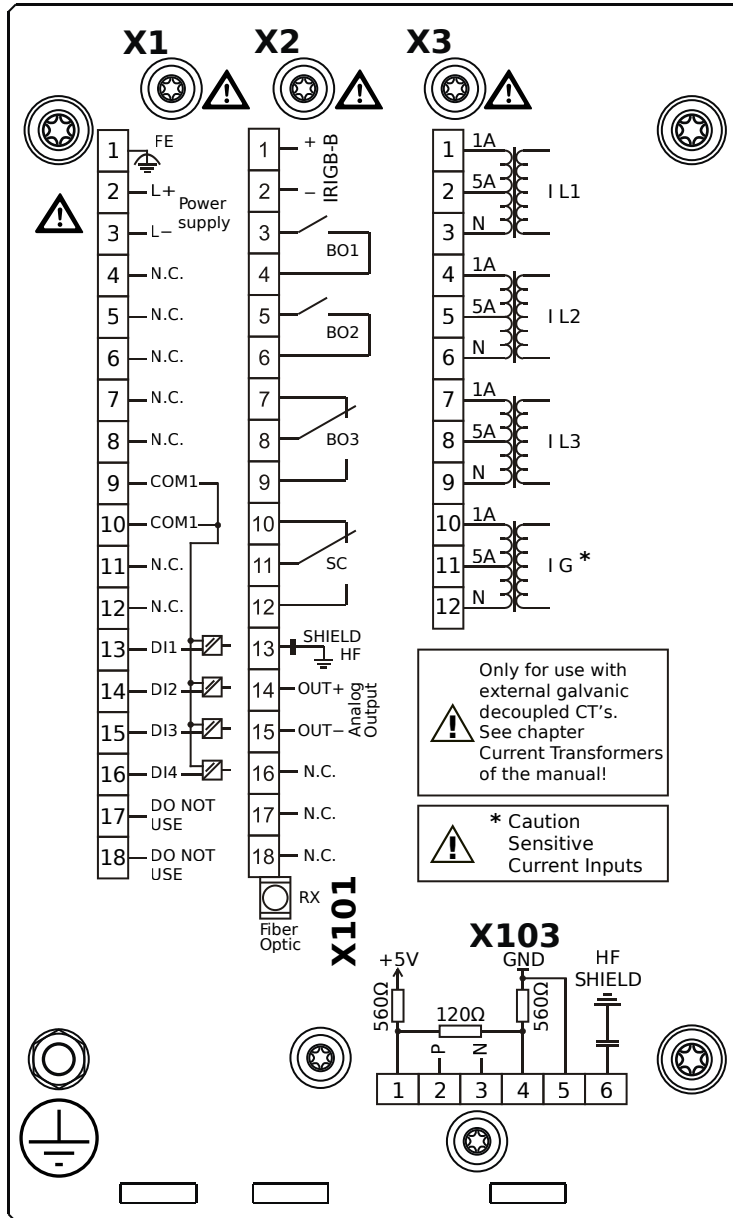

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2B1ABB

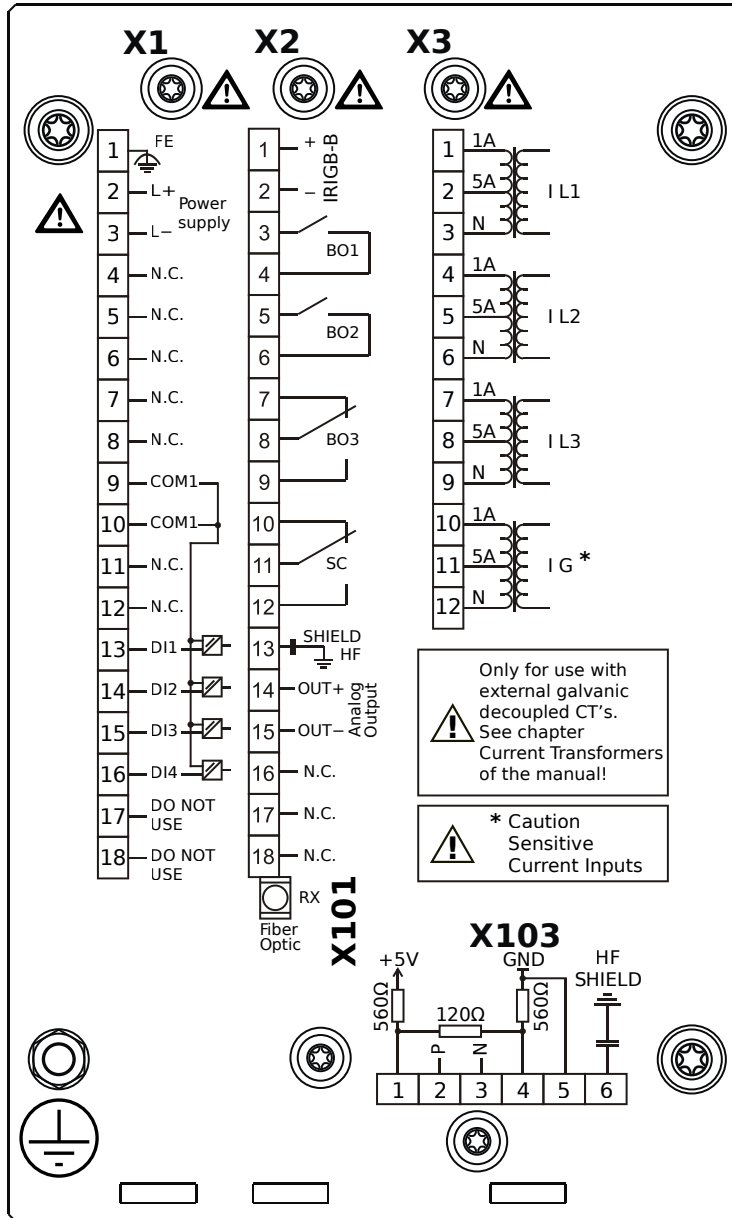

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2B1ACA

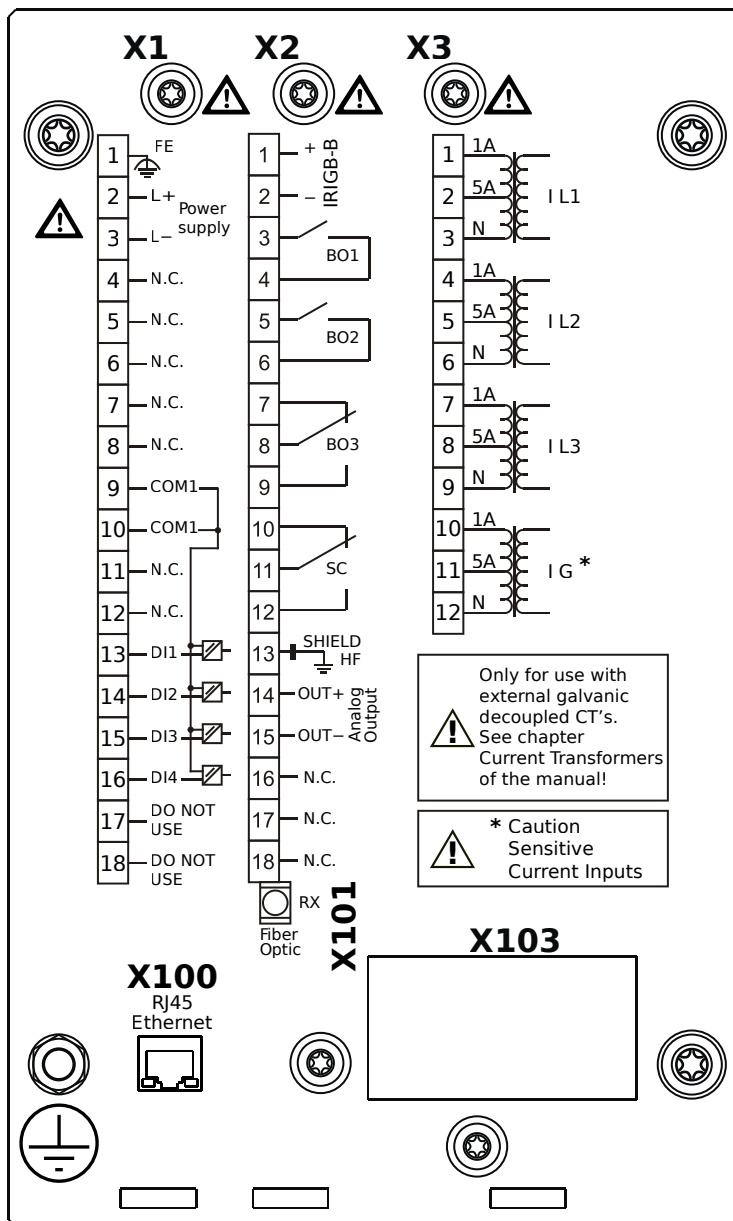

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1ACB

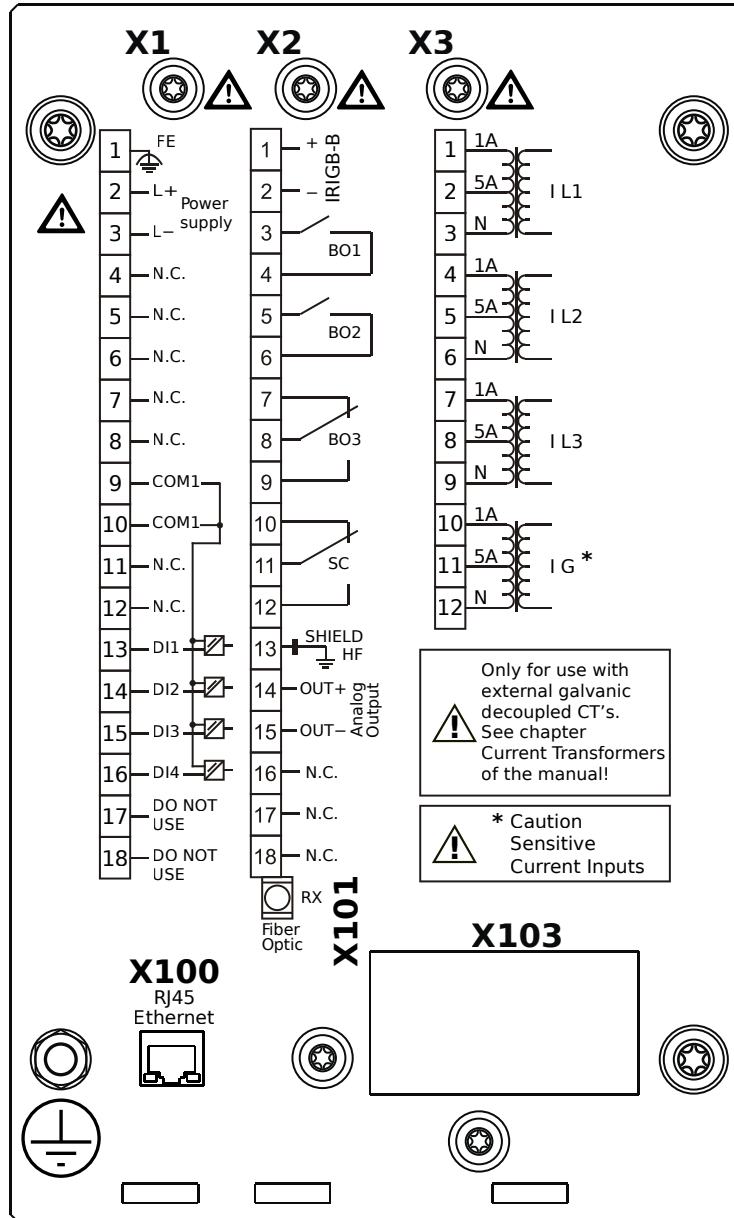

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1ADA

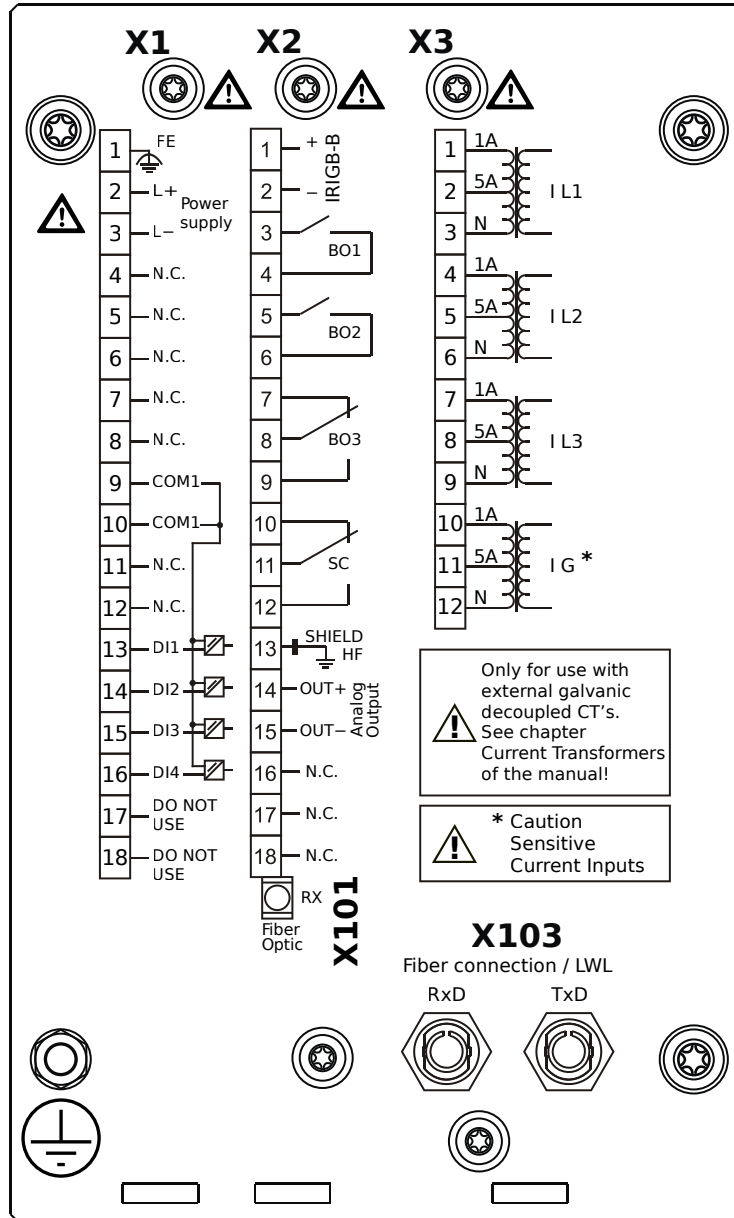

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2B1ADB

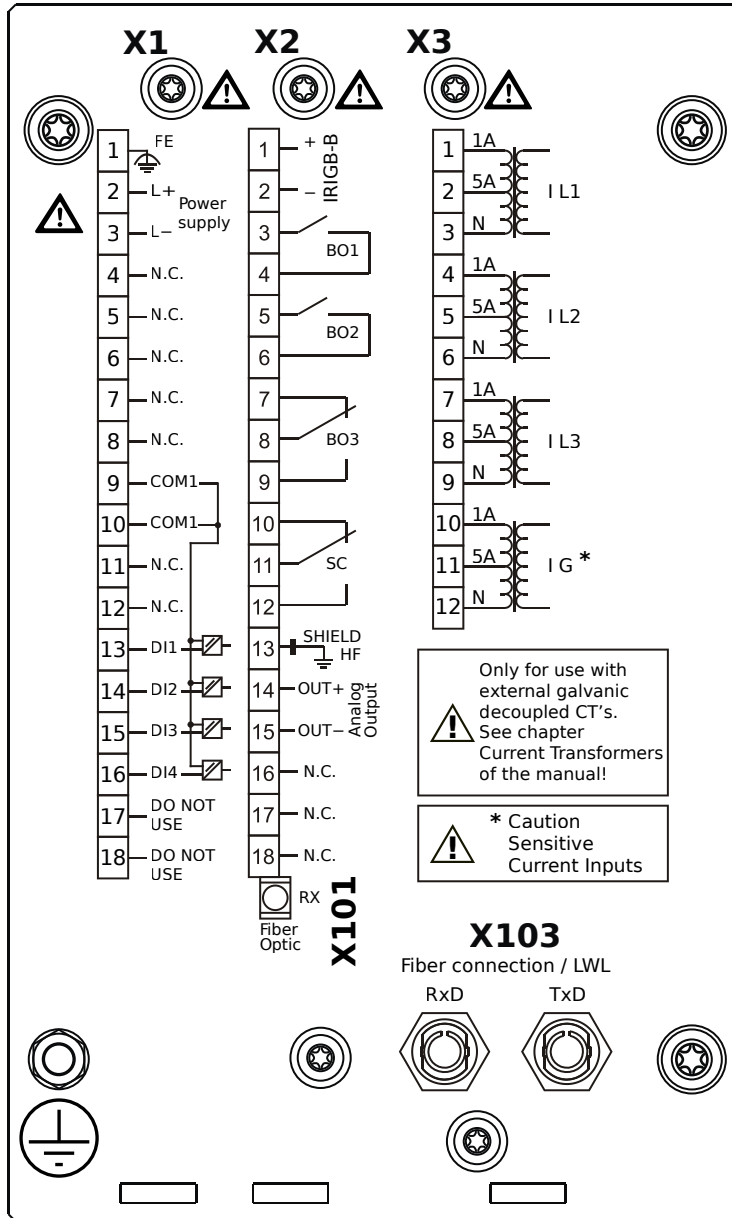

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2B1AEA

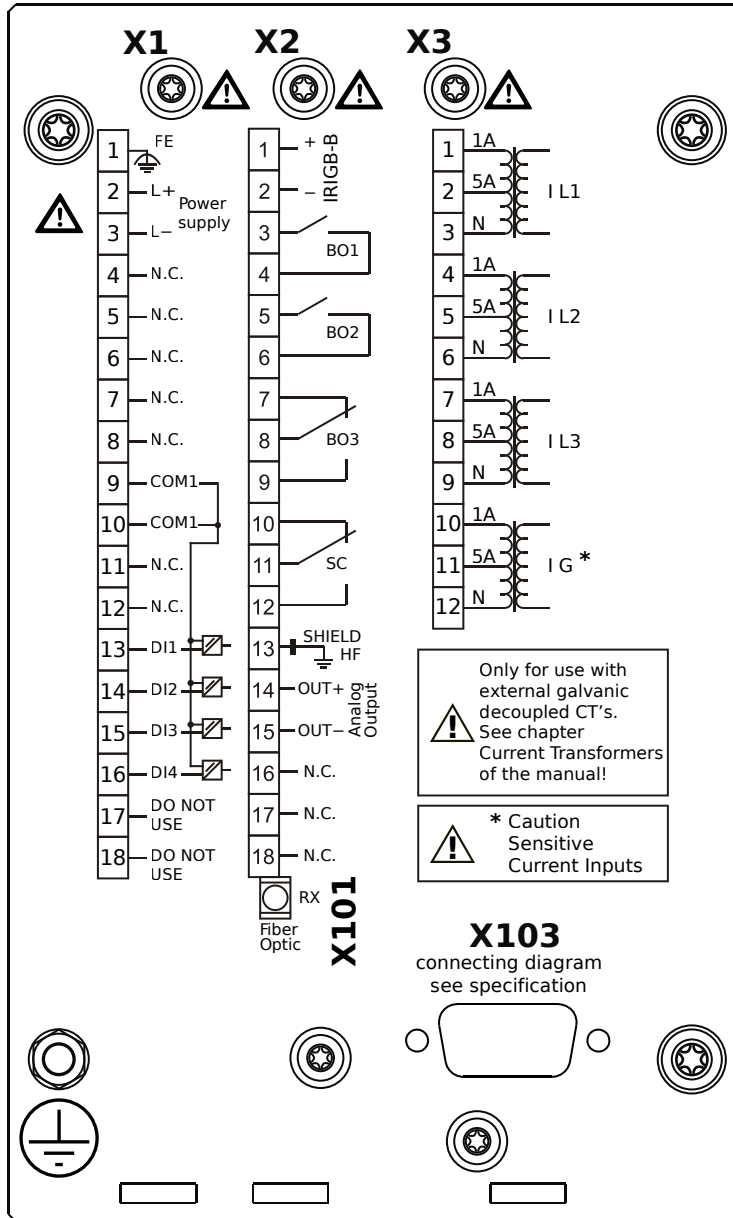

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, RS485, D-SUB

MRM4-2B1AEB

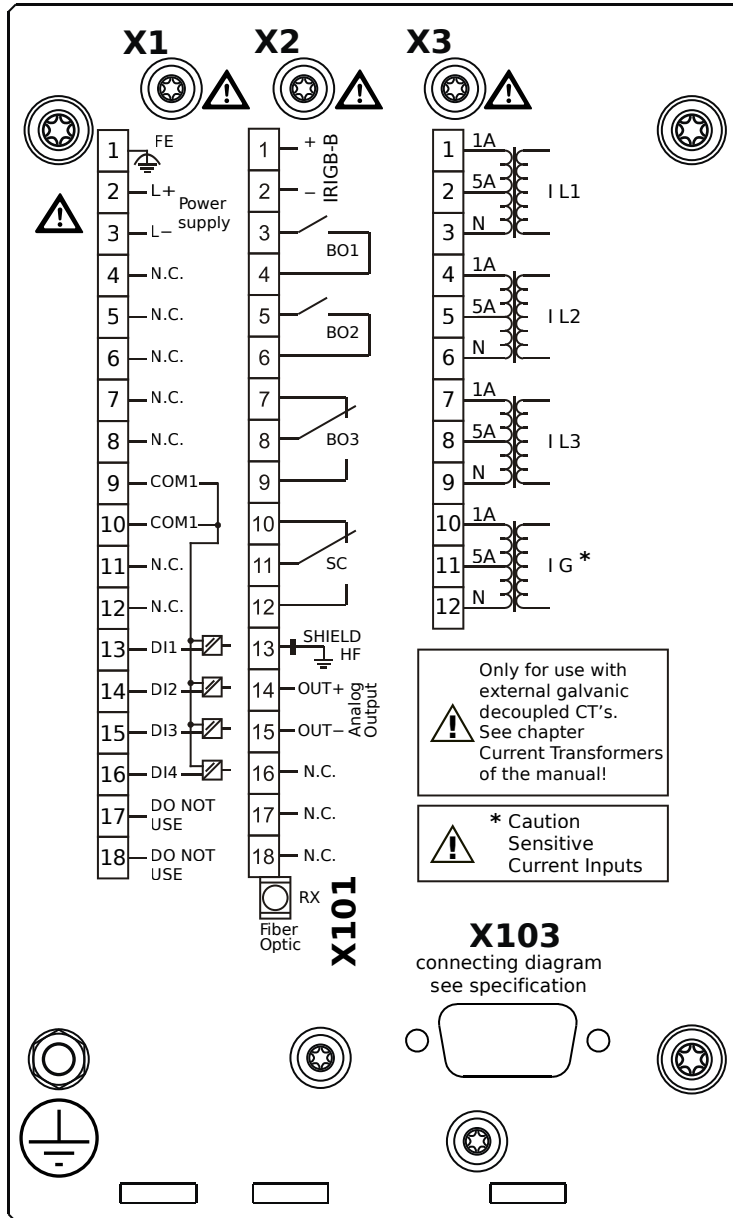

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, RS485, D-SUB

MRM4-2B1AFA

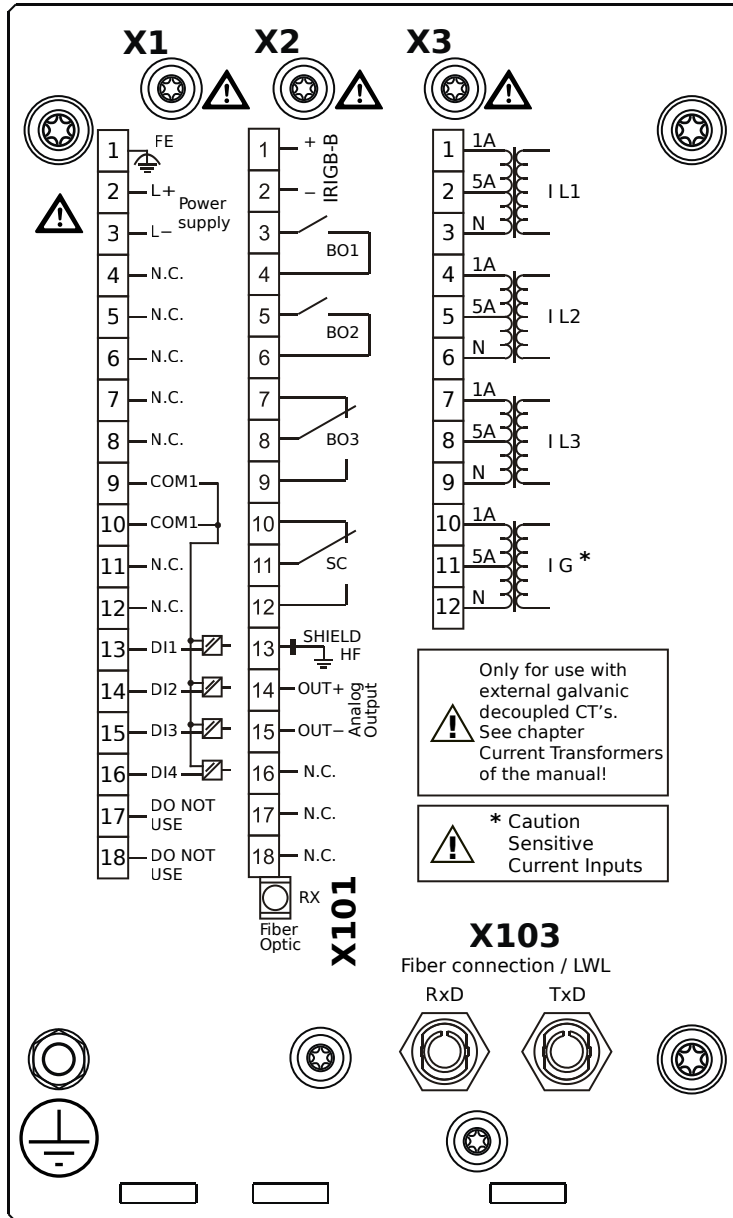

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2B1AFB

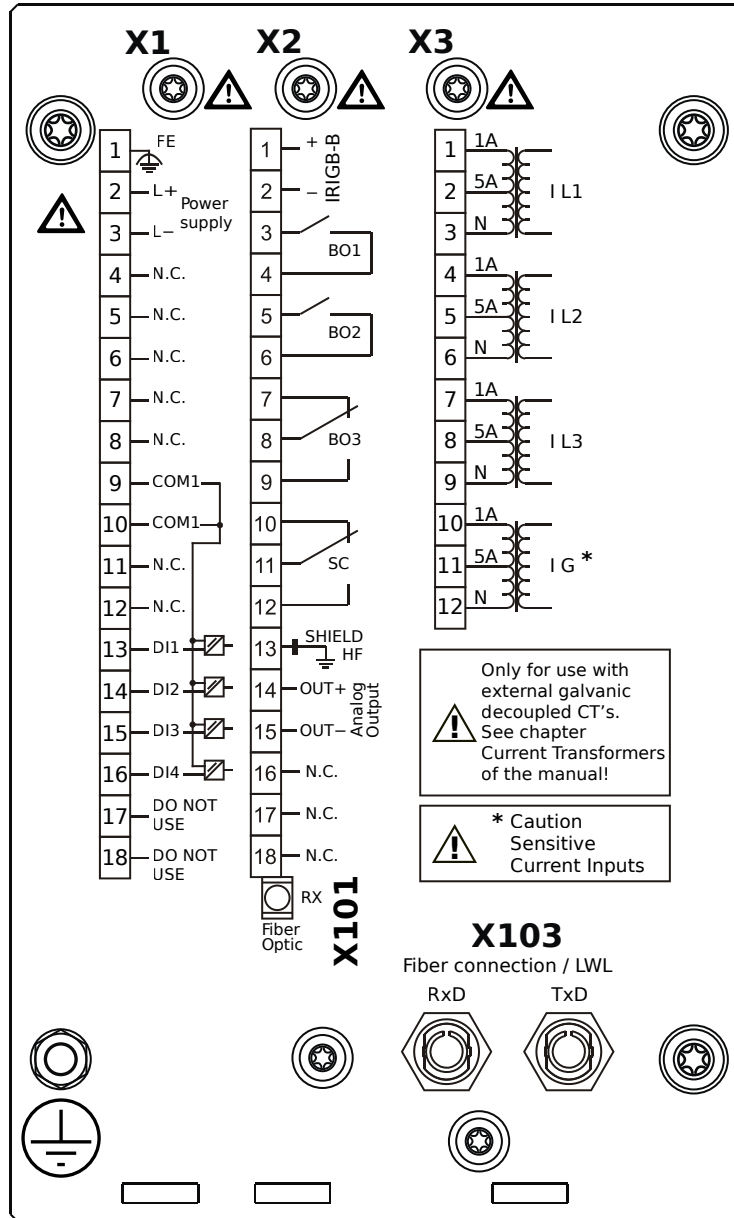

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2B1AGA

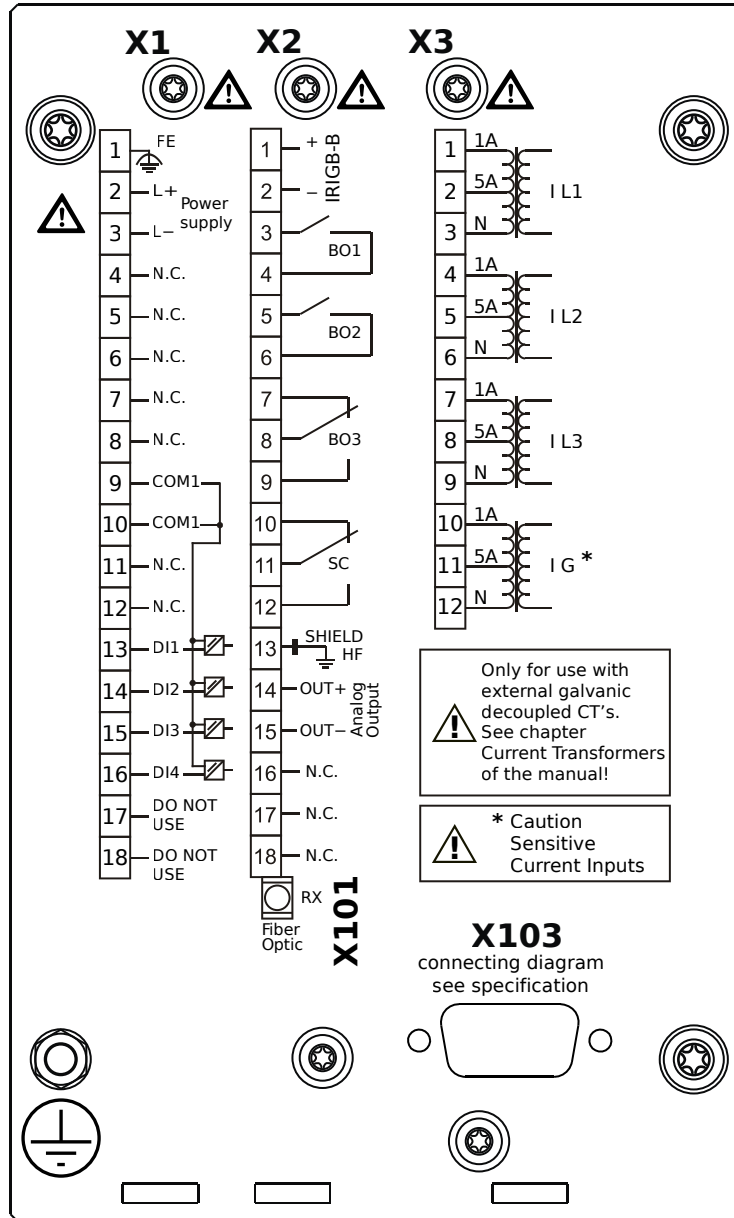

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2B1AGB

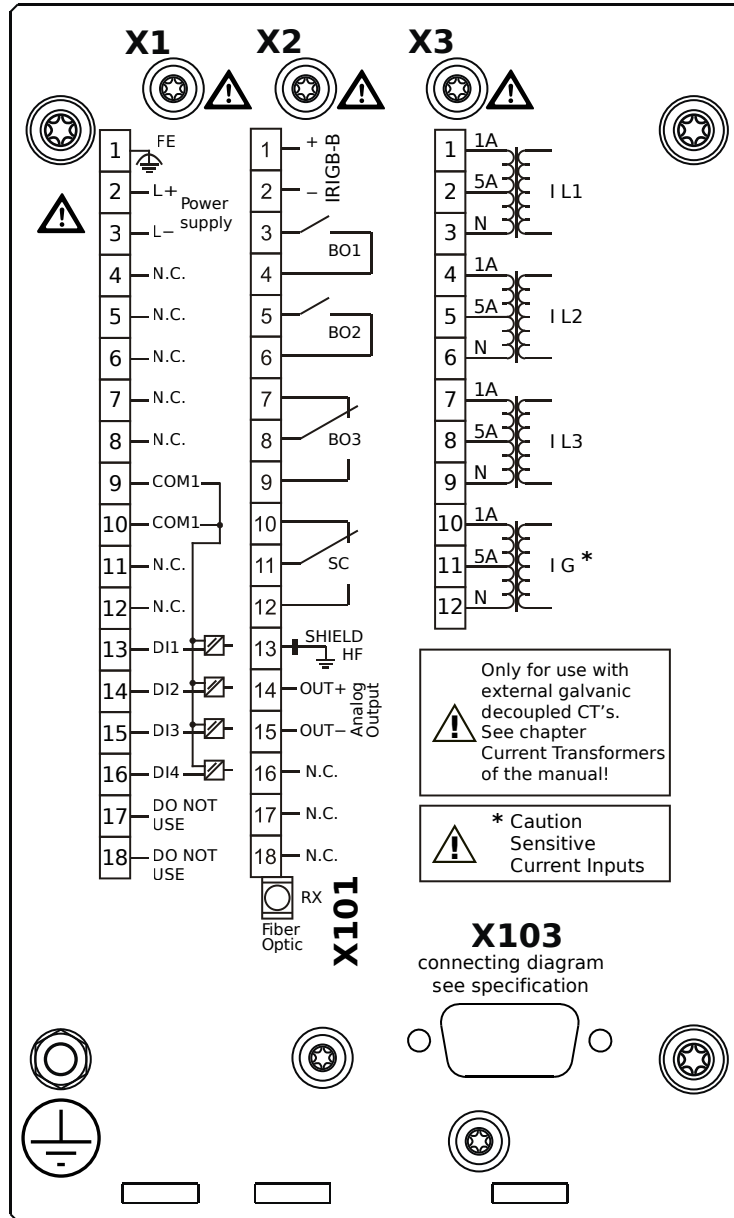

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2B1AHA

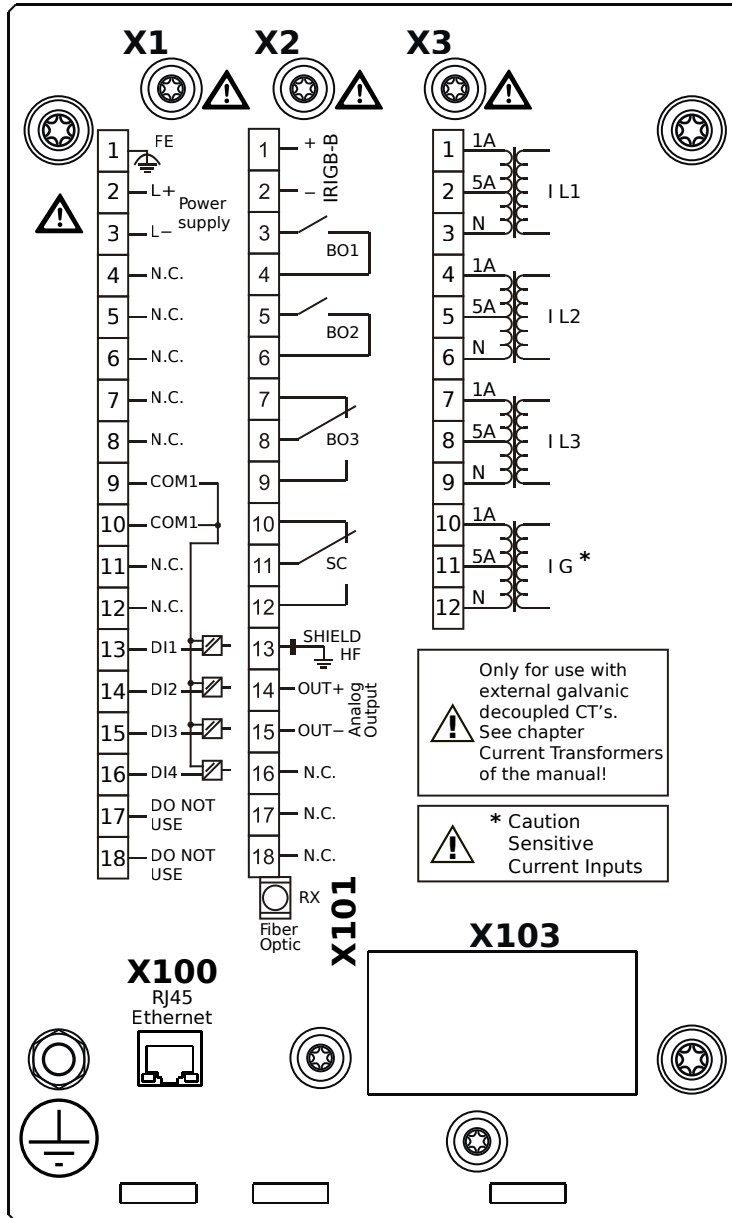

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1AHB

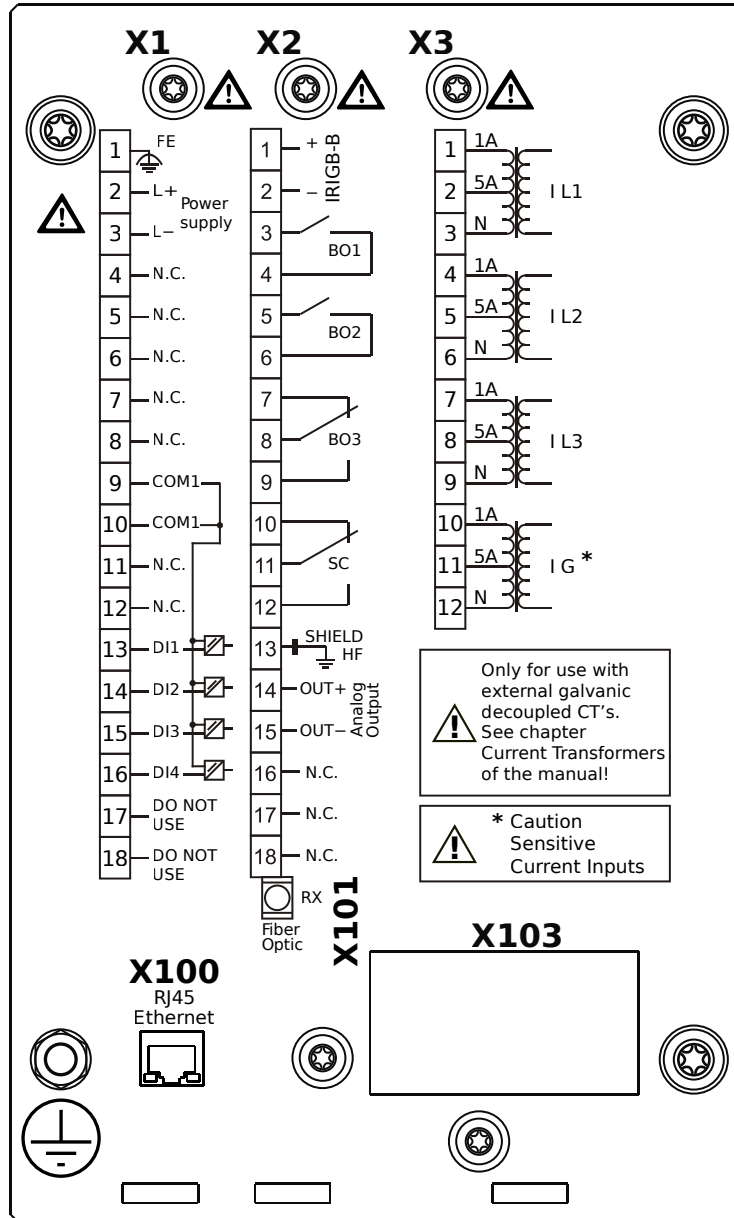

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

IRIG-B

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

FX)

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1AIA

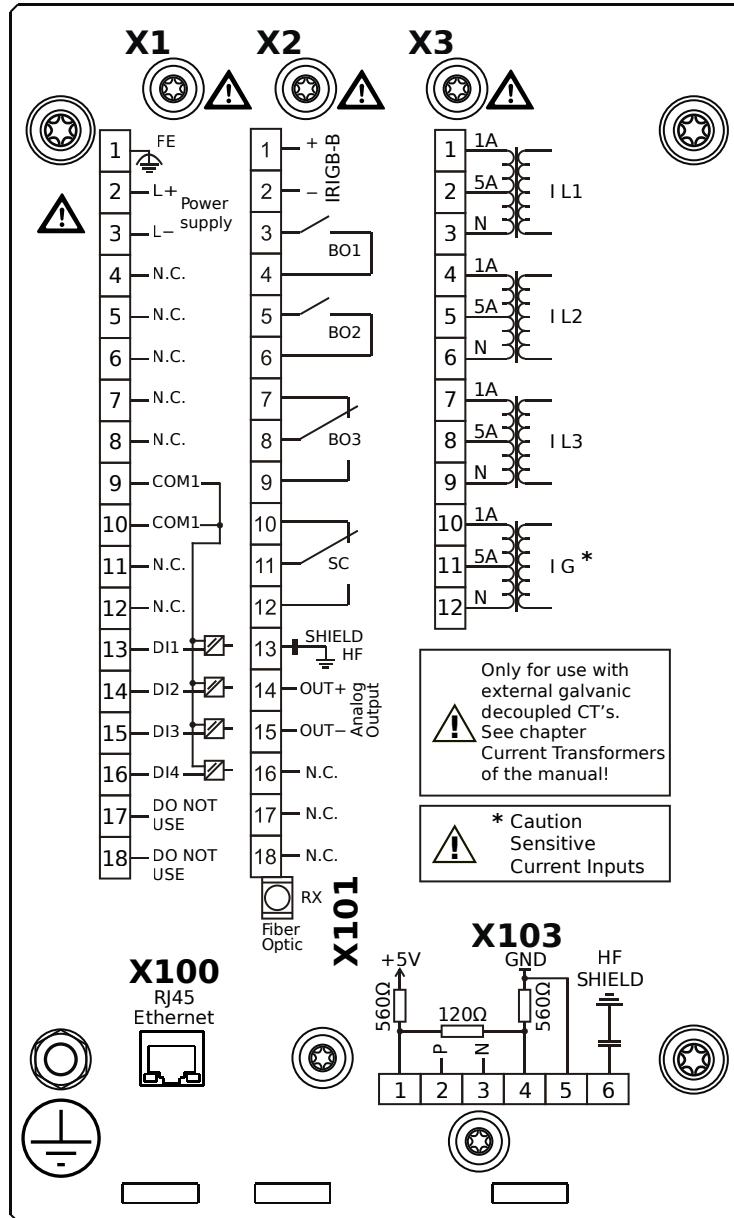

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B1AIB

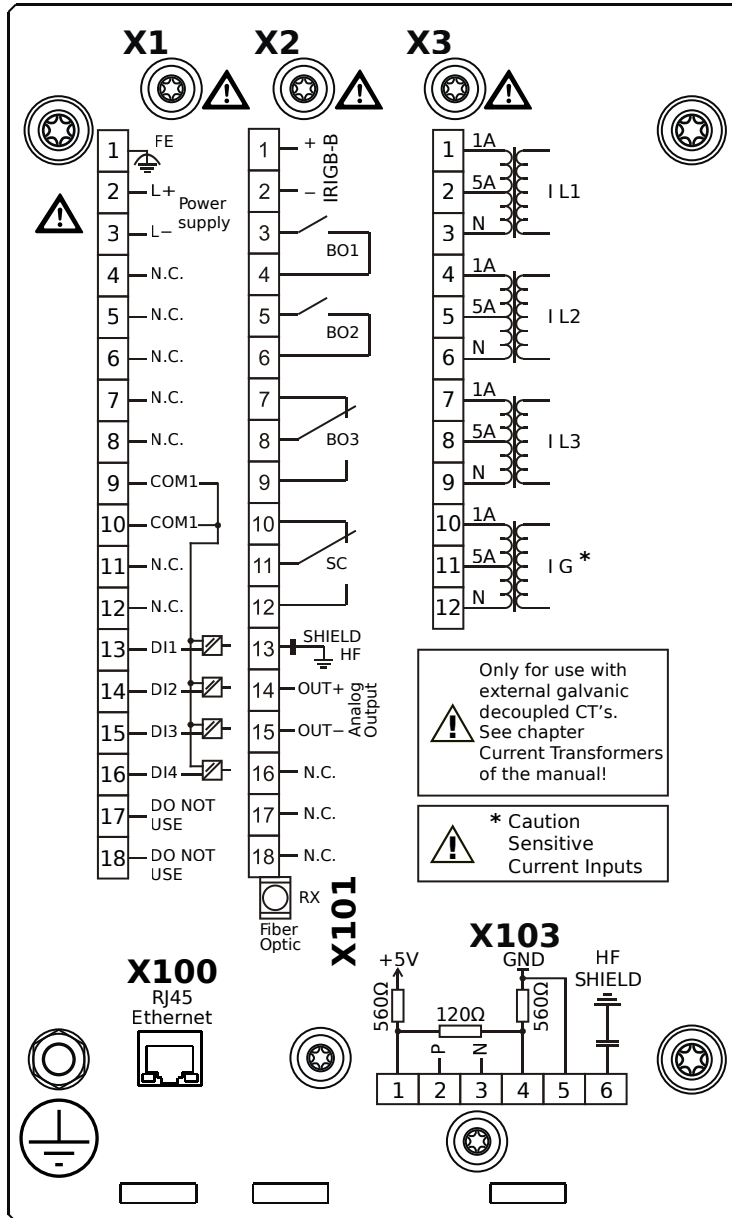

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

IRIG-B


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B1AKA

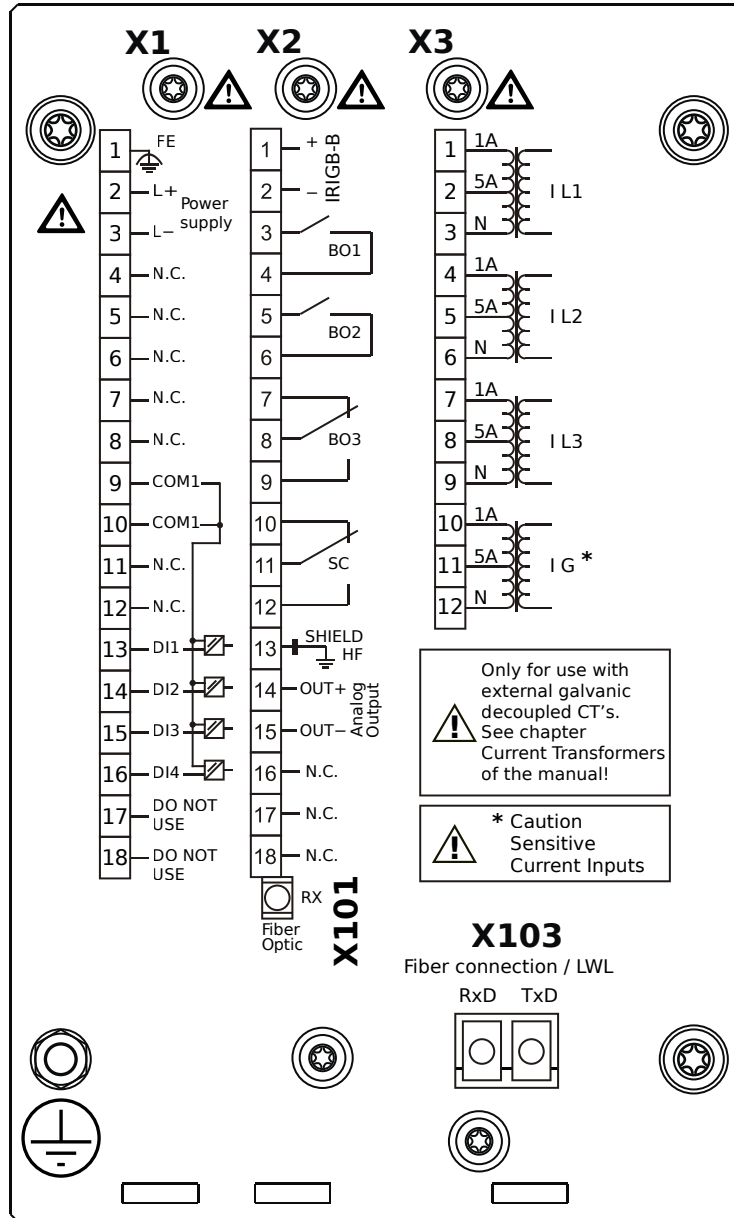

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B1AKB

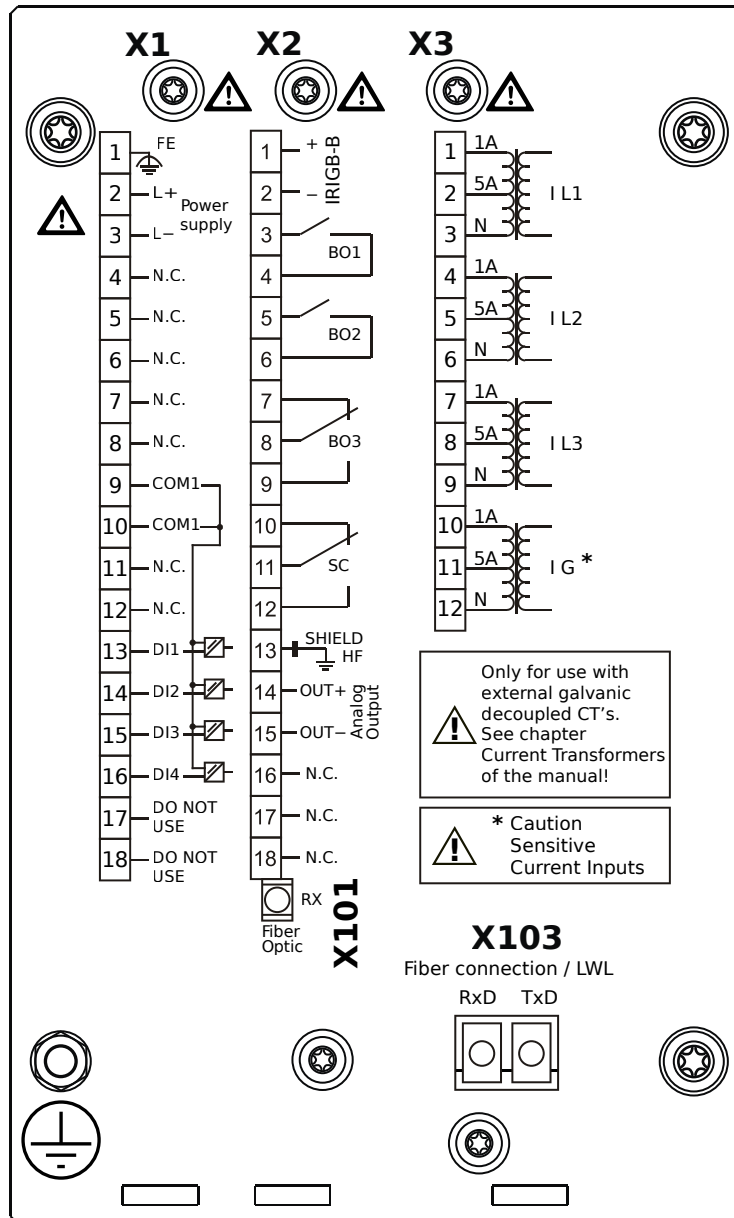

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B1ALA

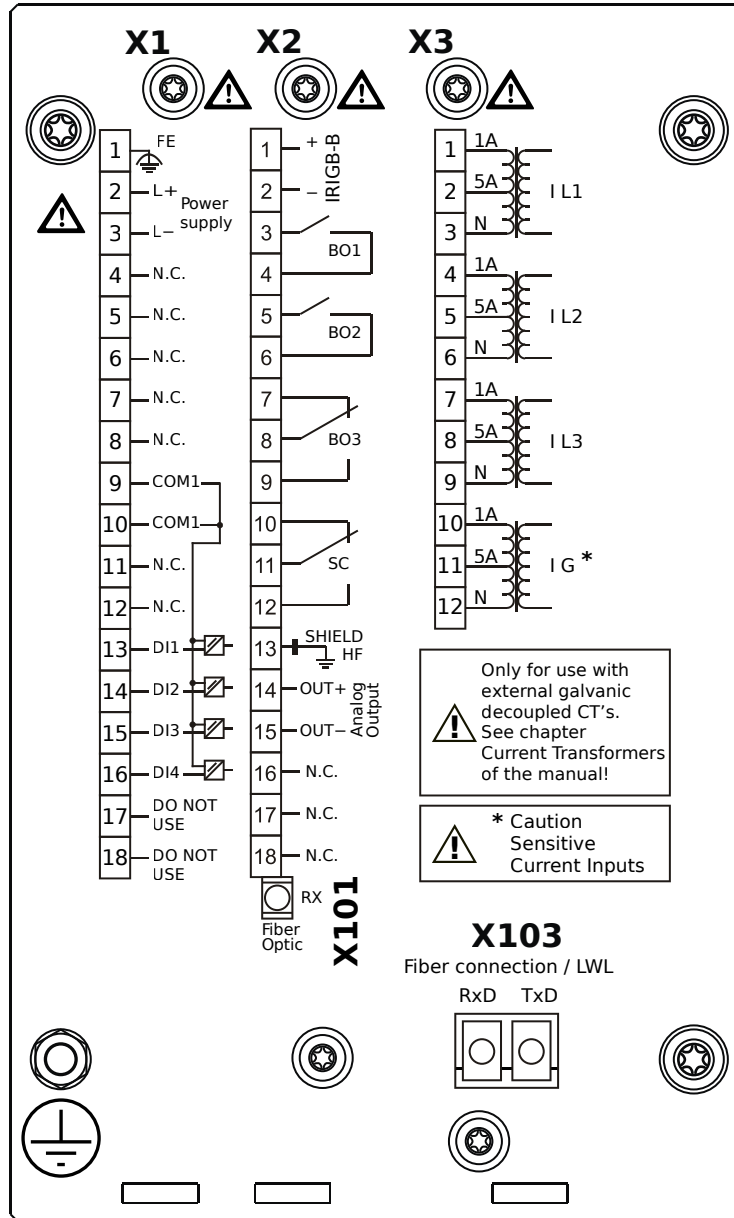

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B1ALB

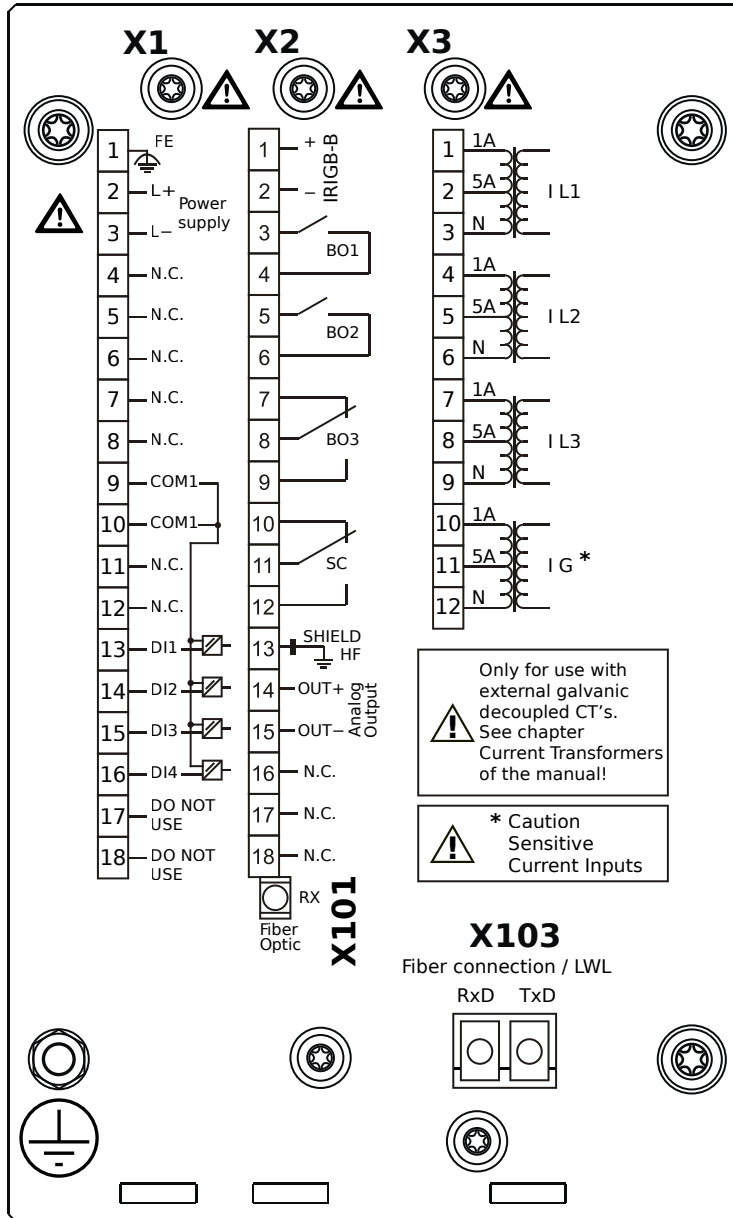

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B1AOA

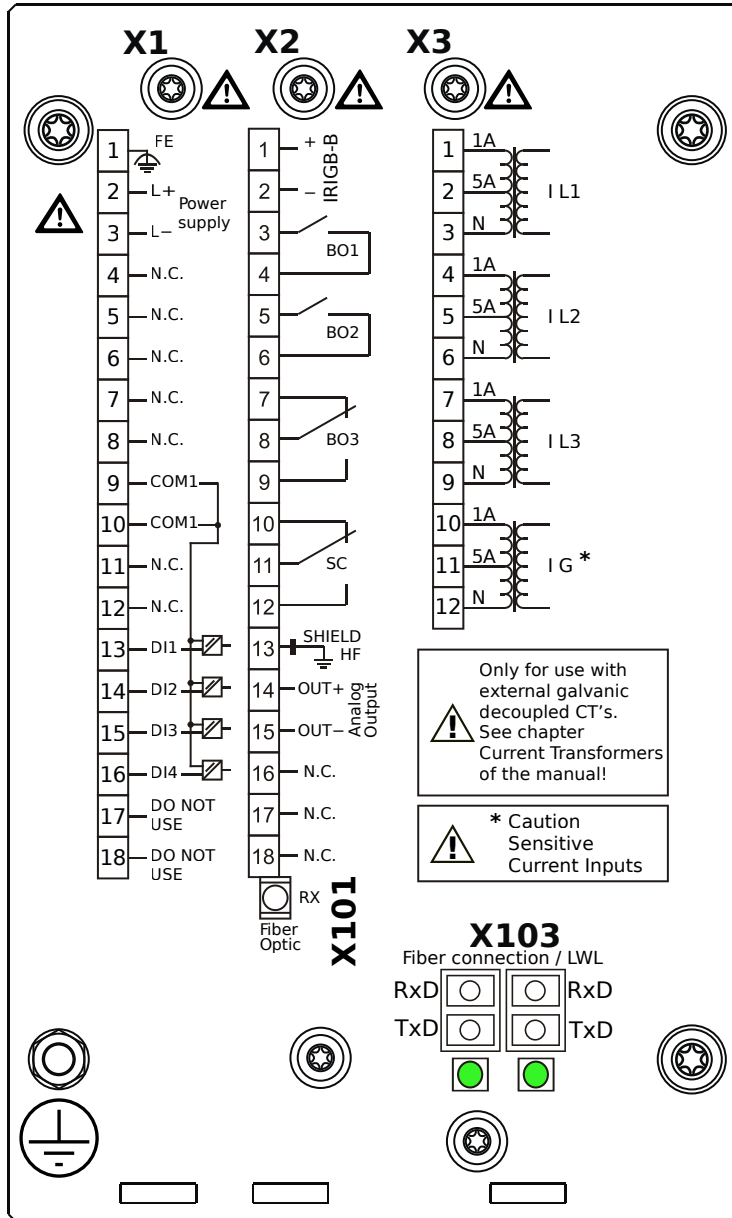

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B1AOB

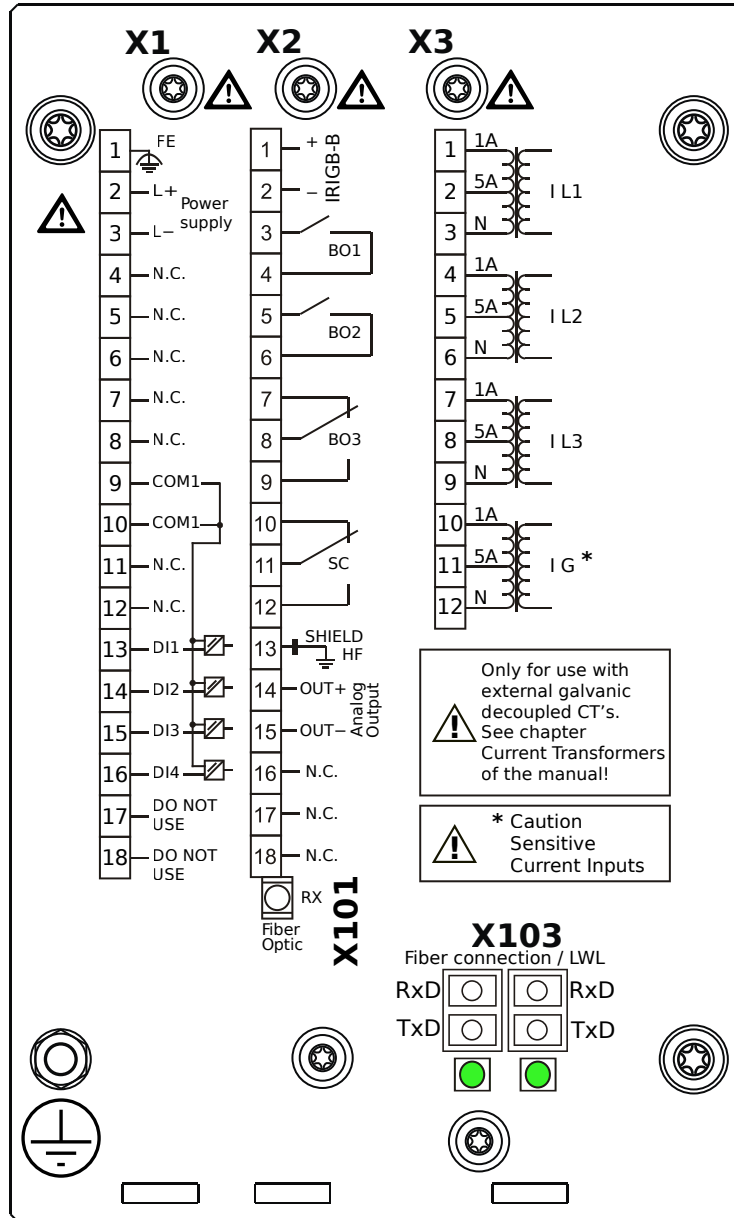

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B1APA

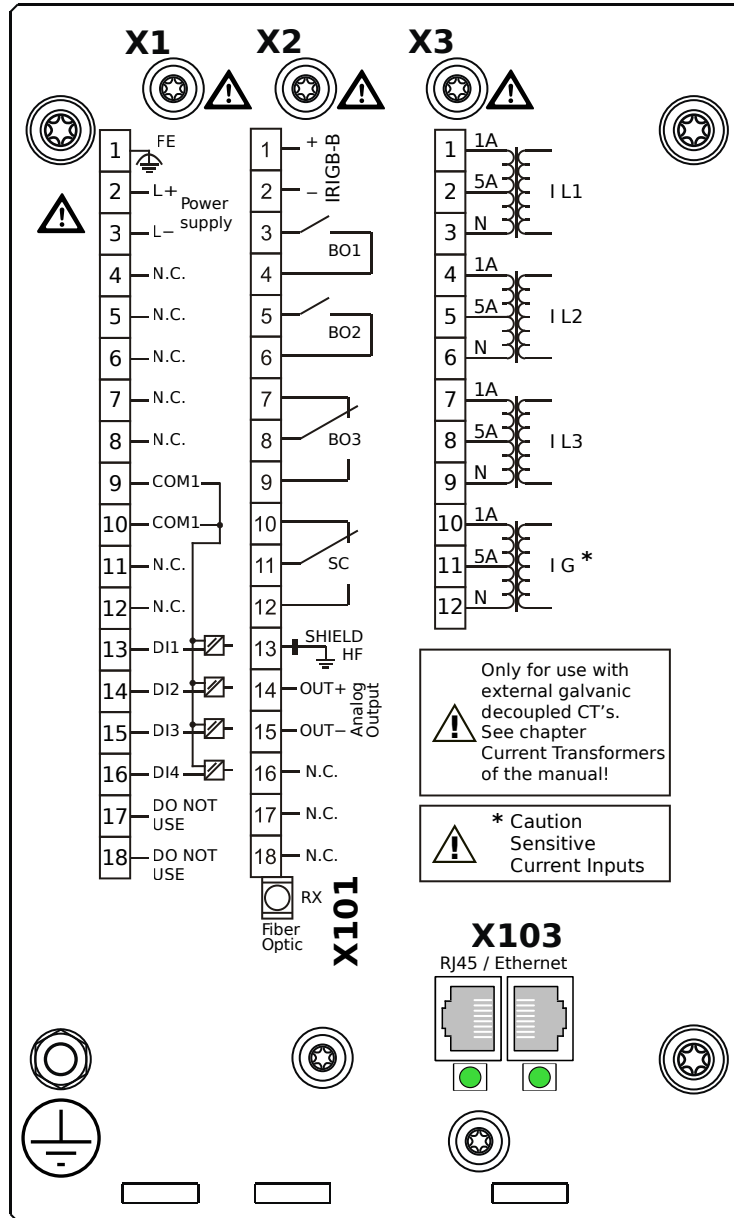

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B1APB

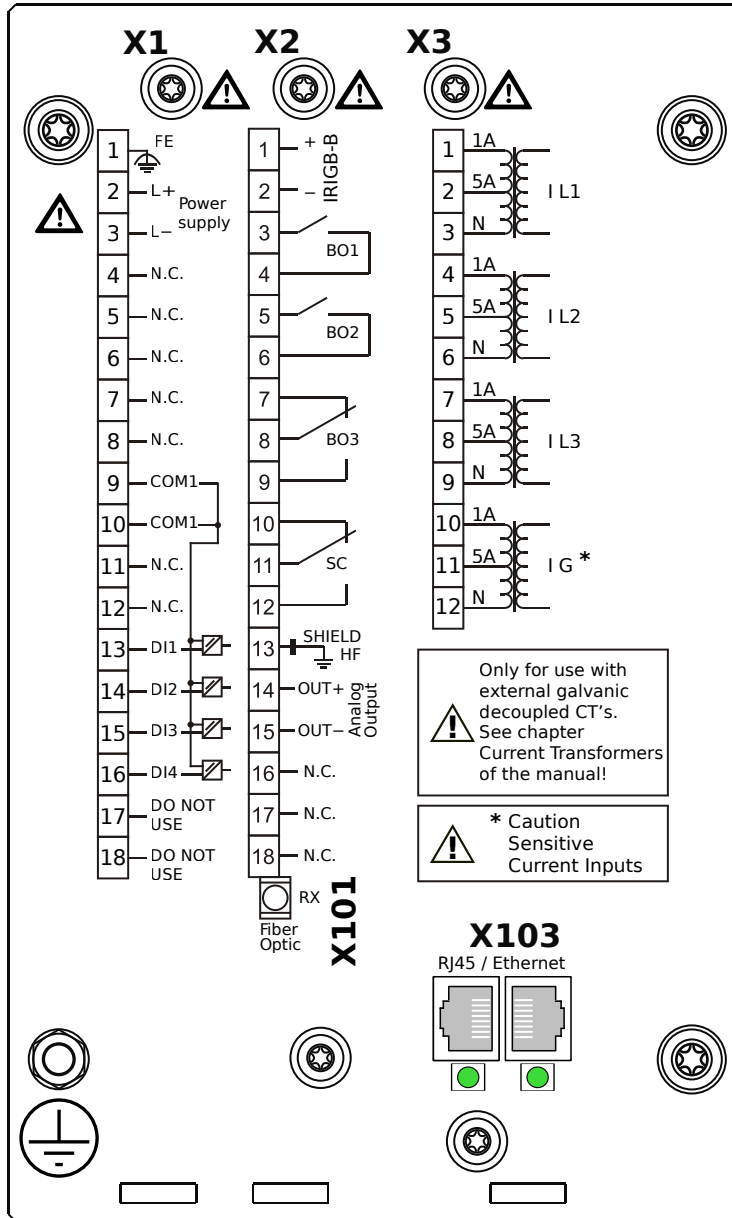

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B1AQA

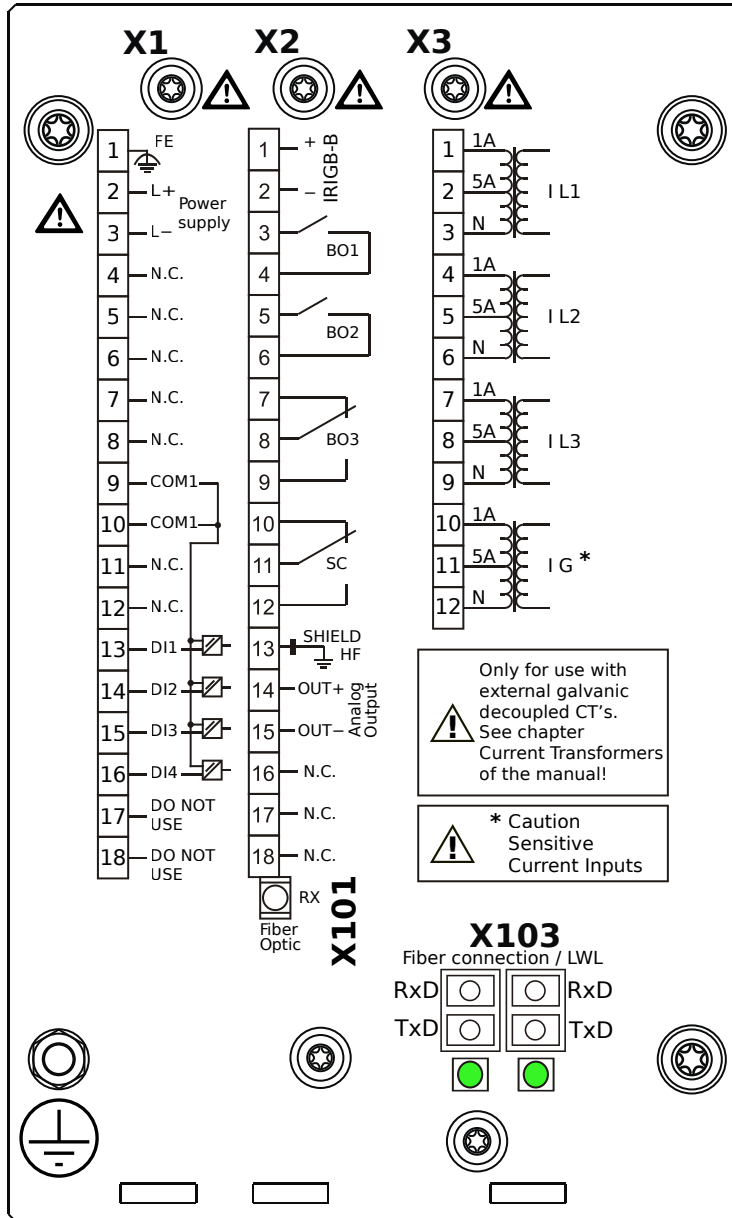

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B1AQB

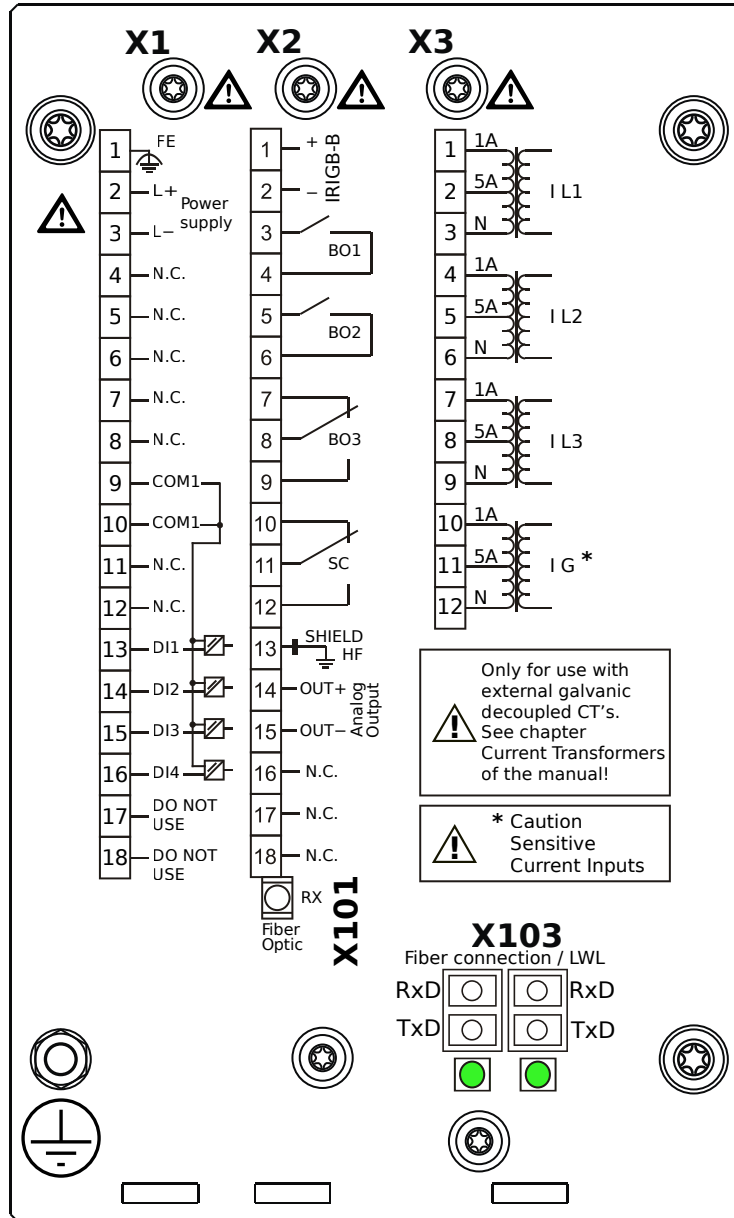

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B1ARA

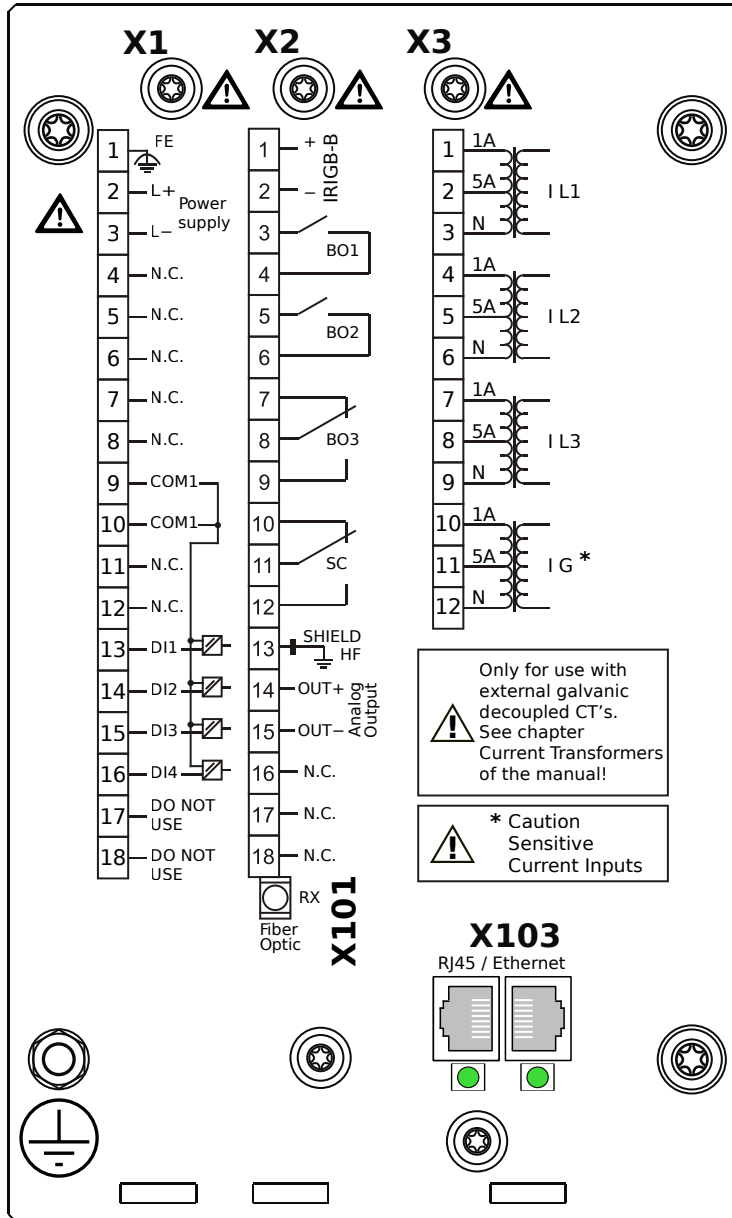

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B1ARB

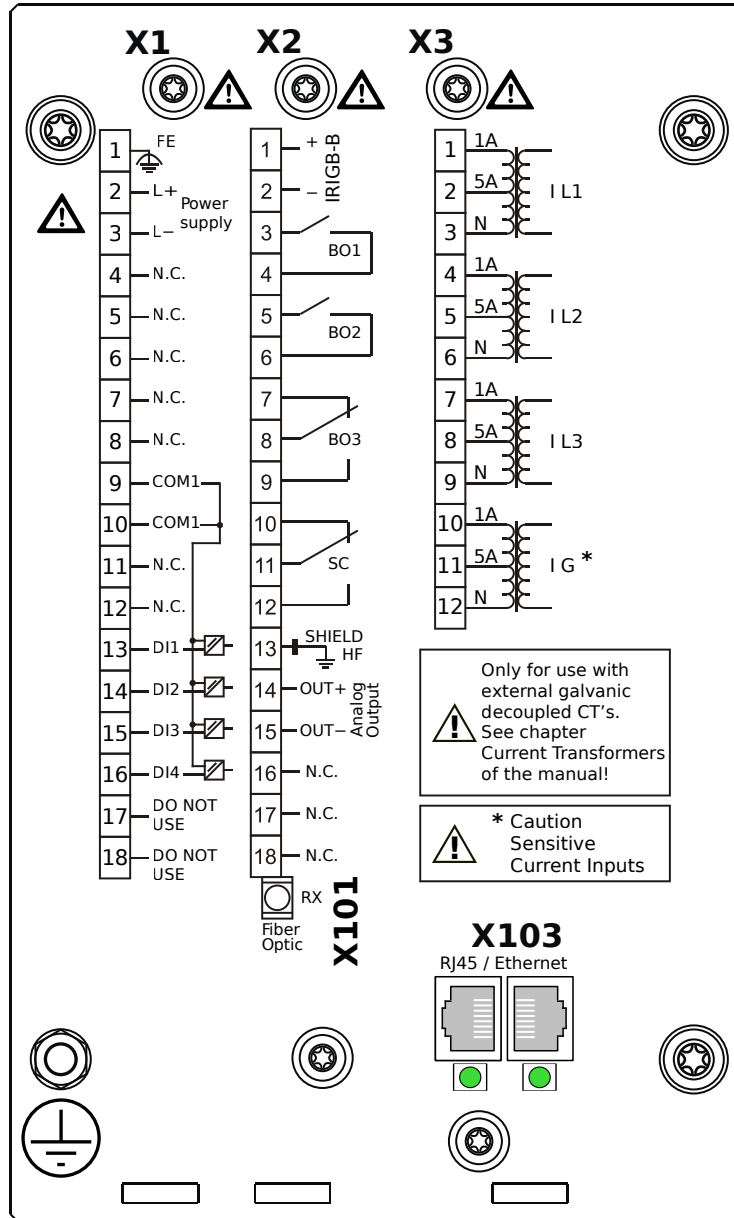

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

IRIG-B


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B1ATA

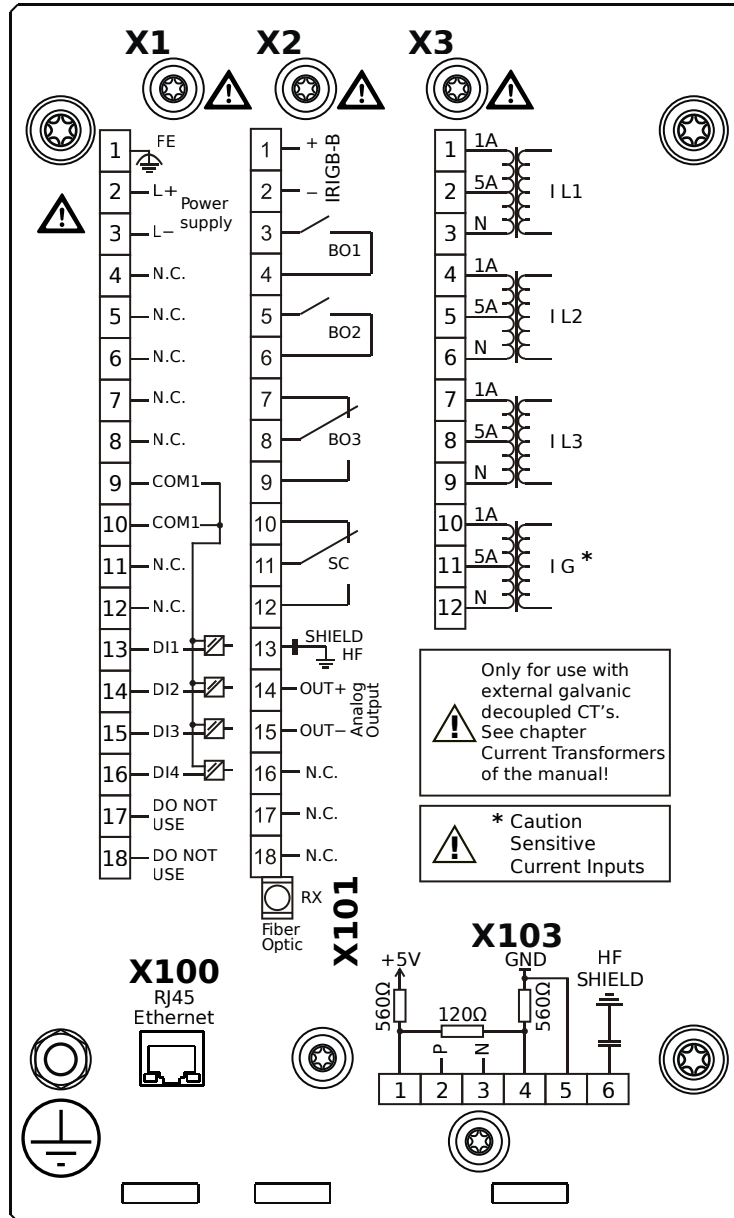

Housing B1, small display, door mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B1ATB

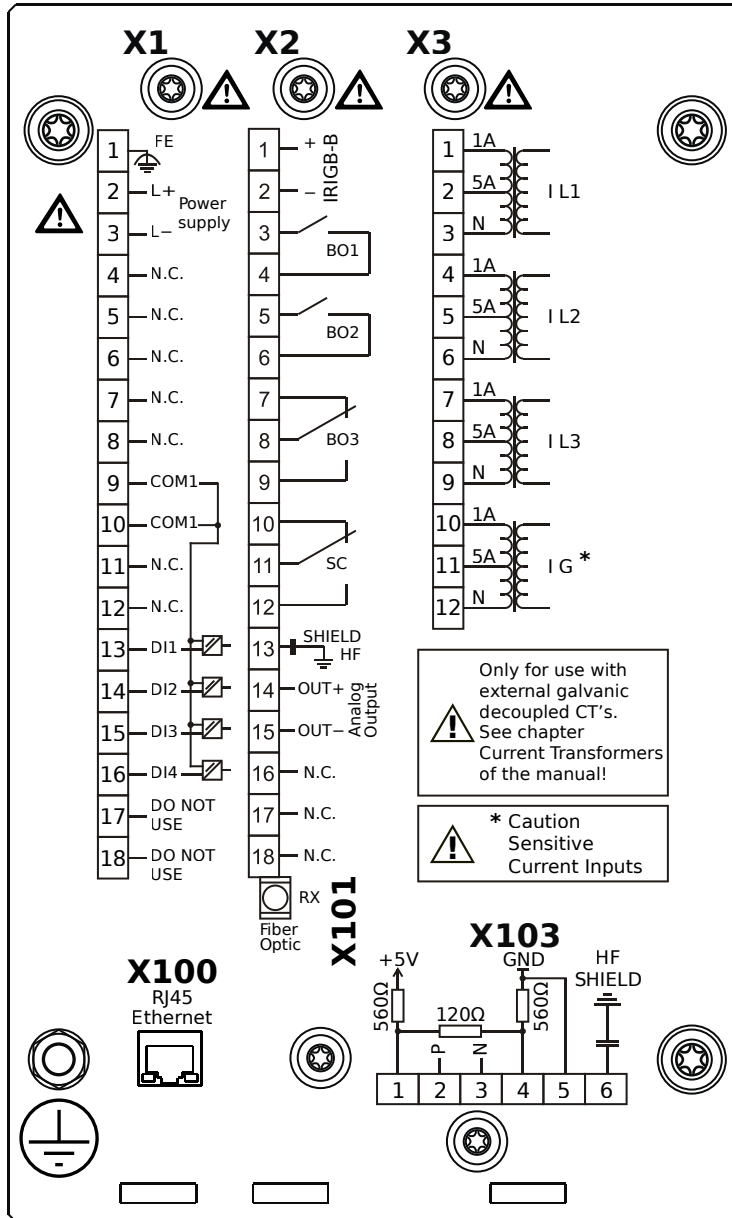

Housing B1, small display, door mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B1BAA

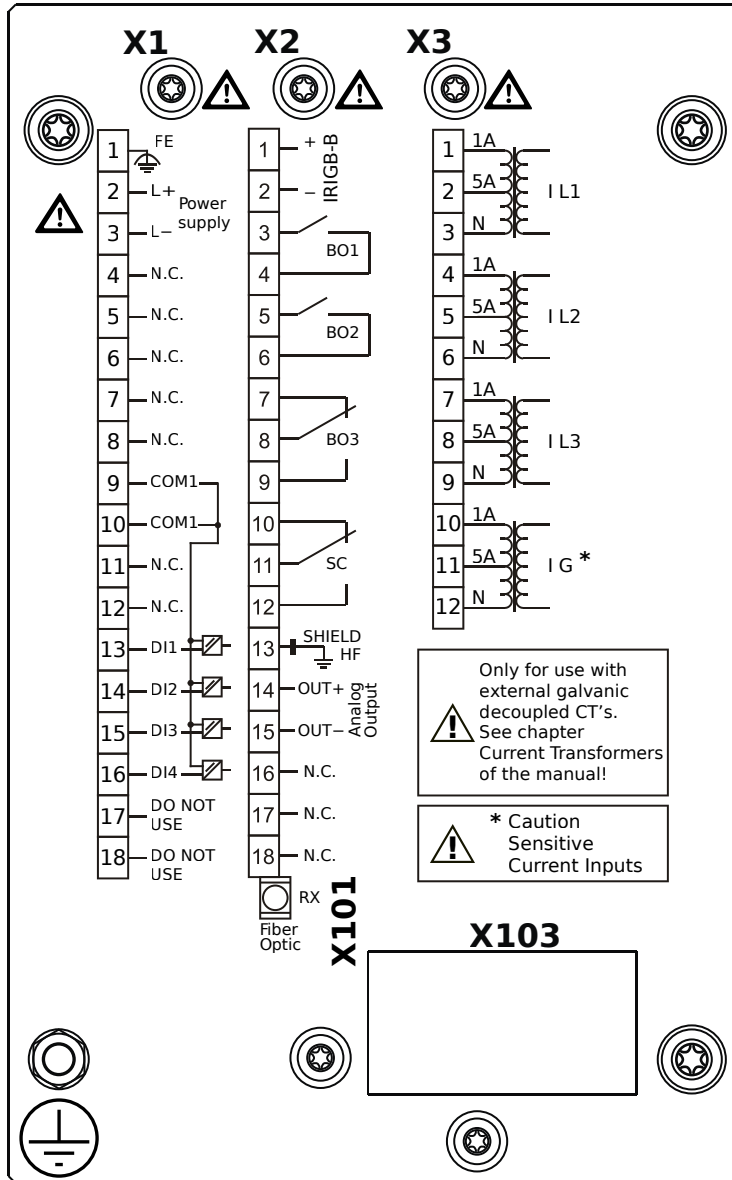

Housing B1, small display, 19" rack mounting


X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1BAB

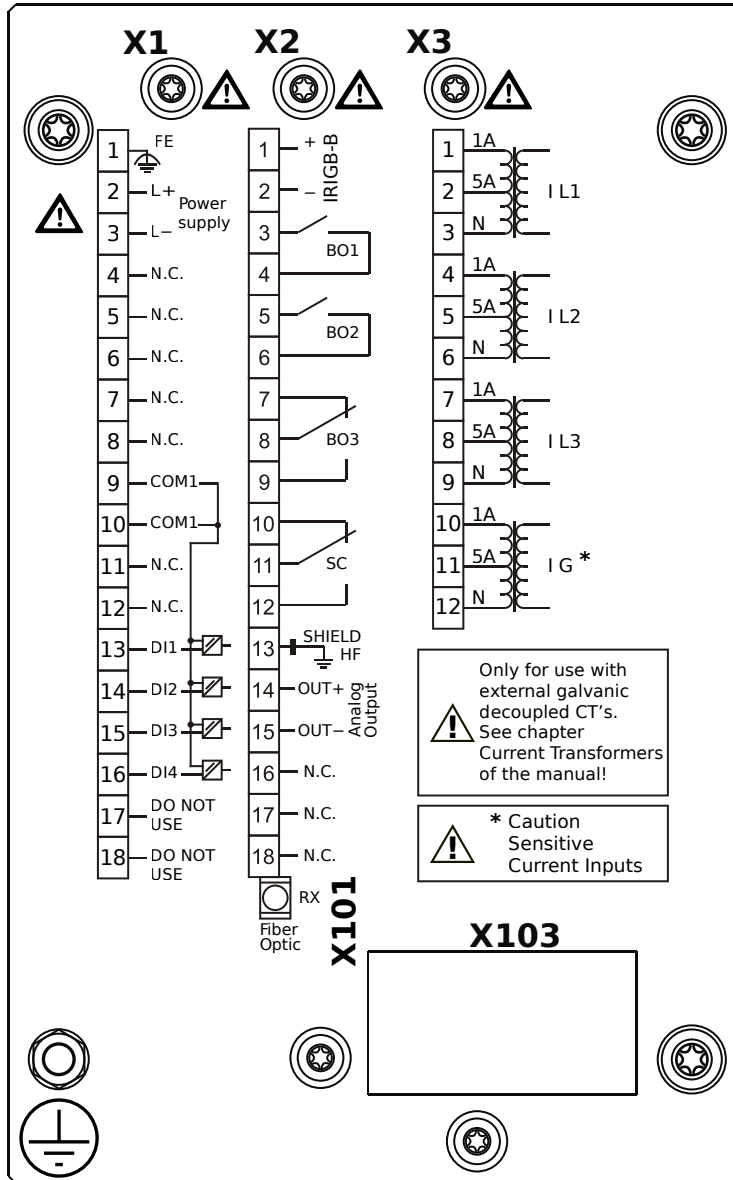

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1BBA

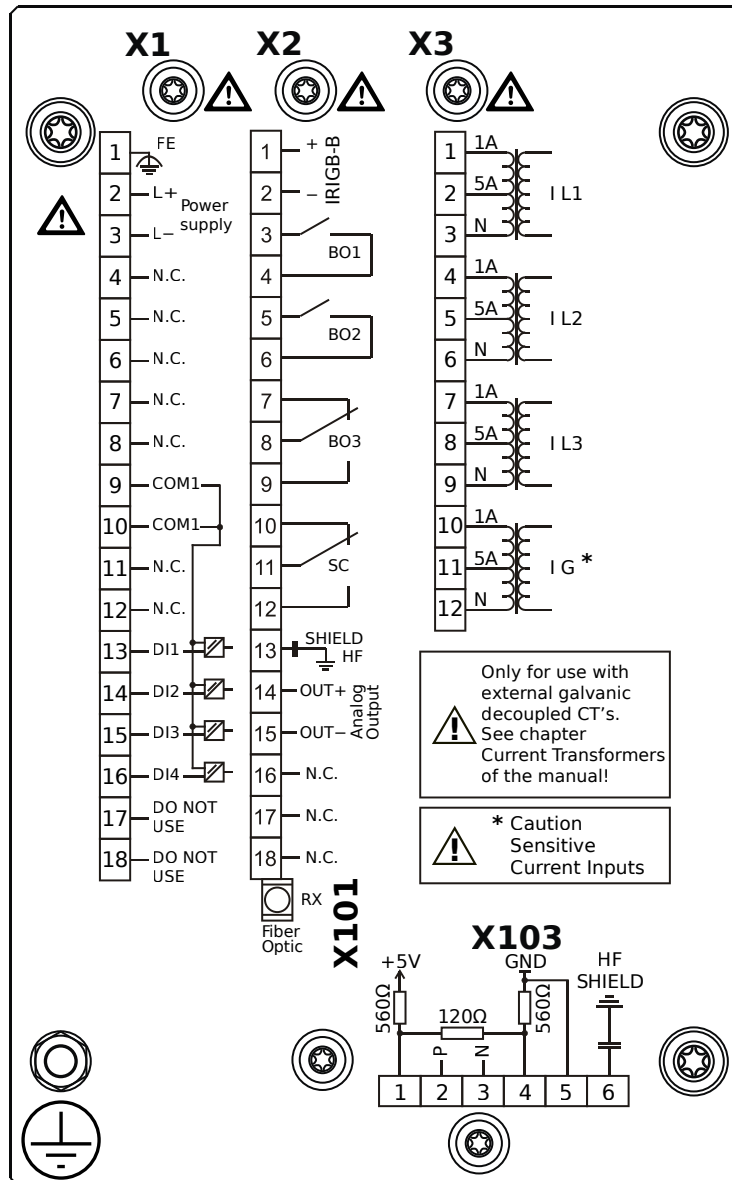

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2B1BBB

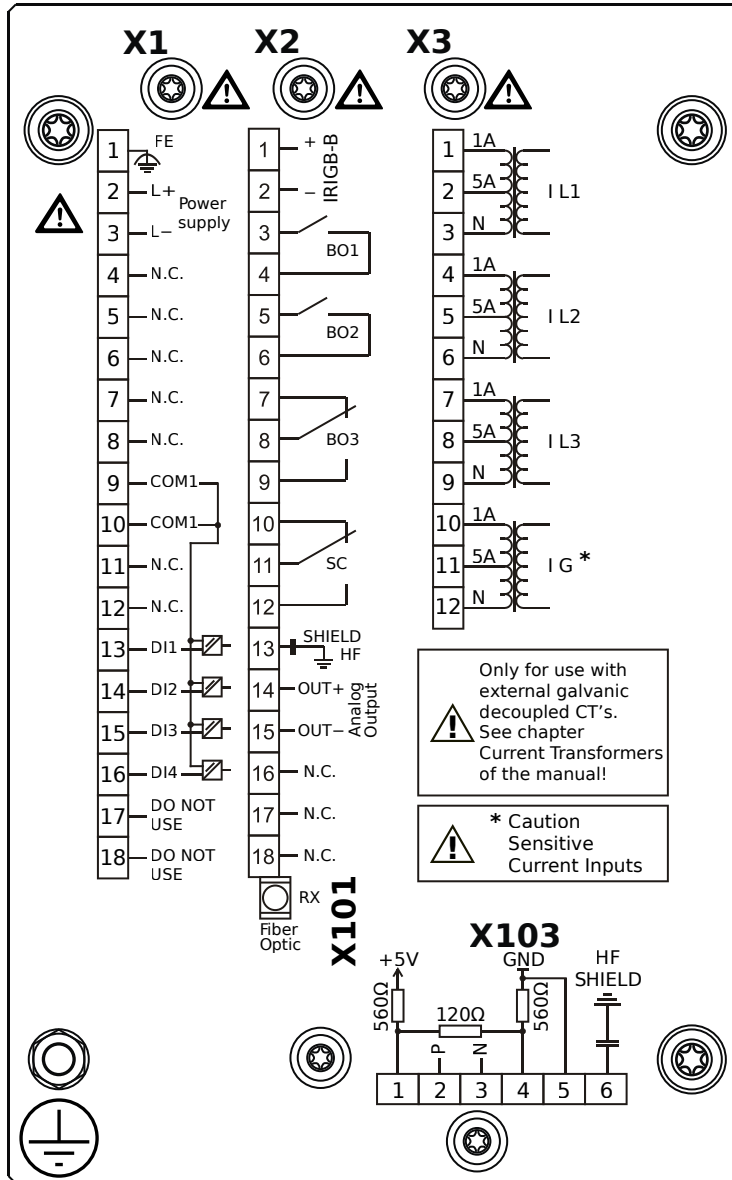

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, Terminals

MRM4-2B1BCA

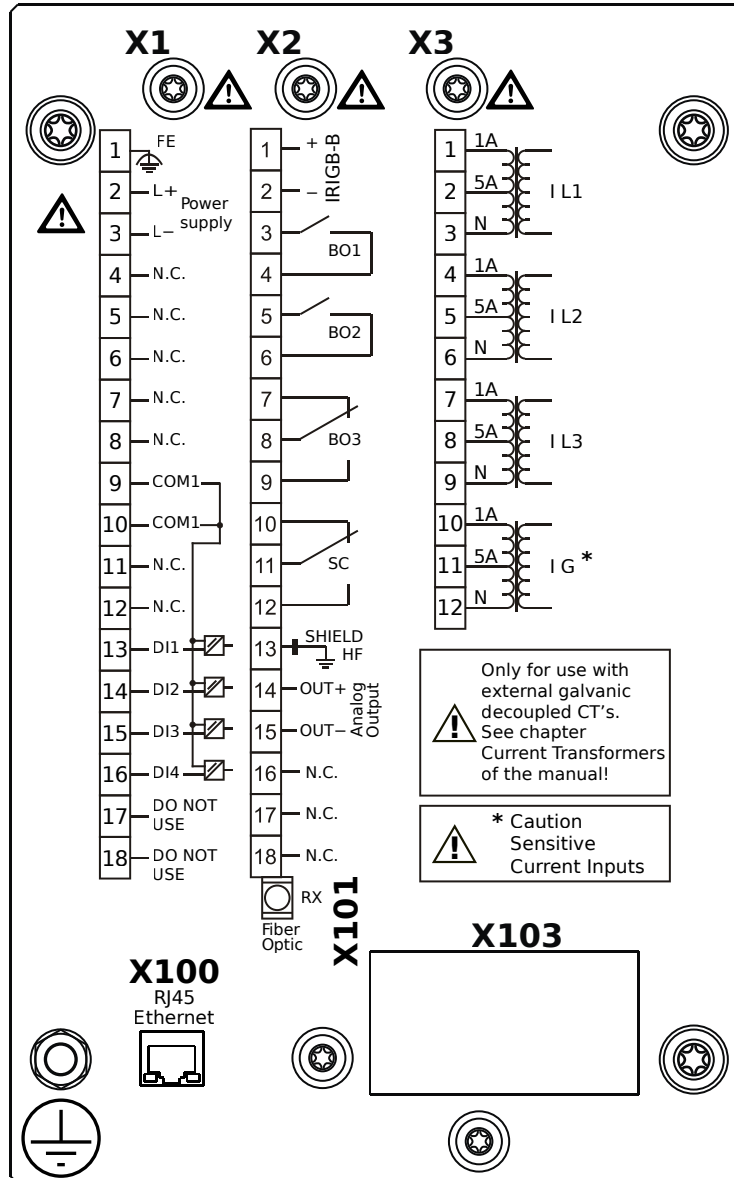

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1BCB

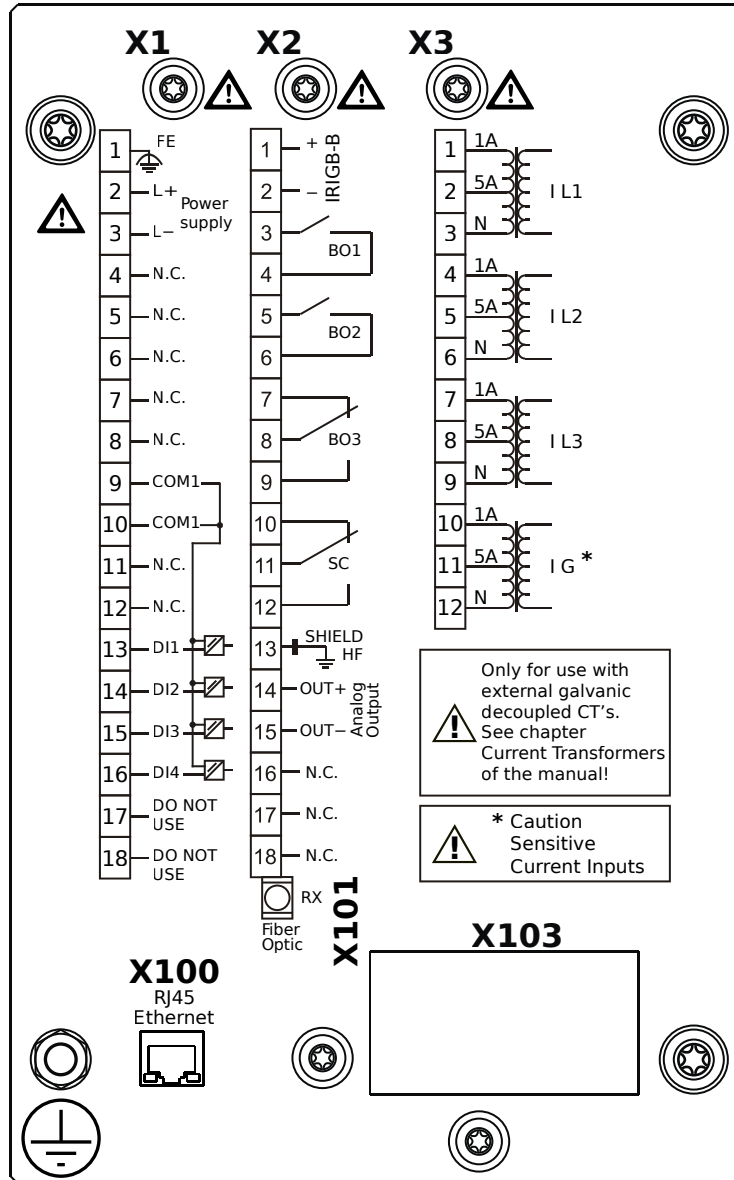

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1BDA

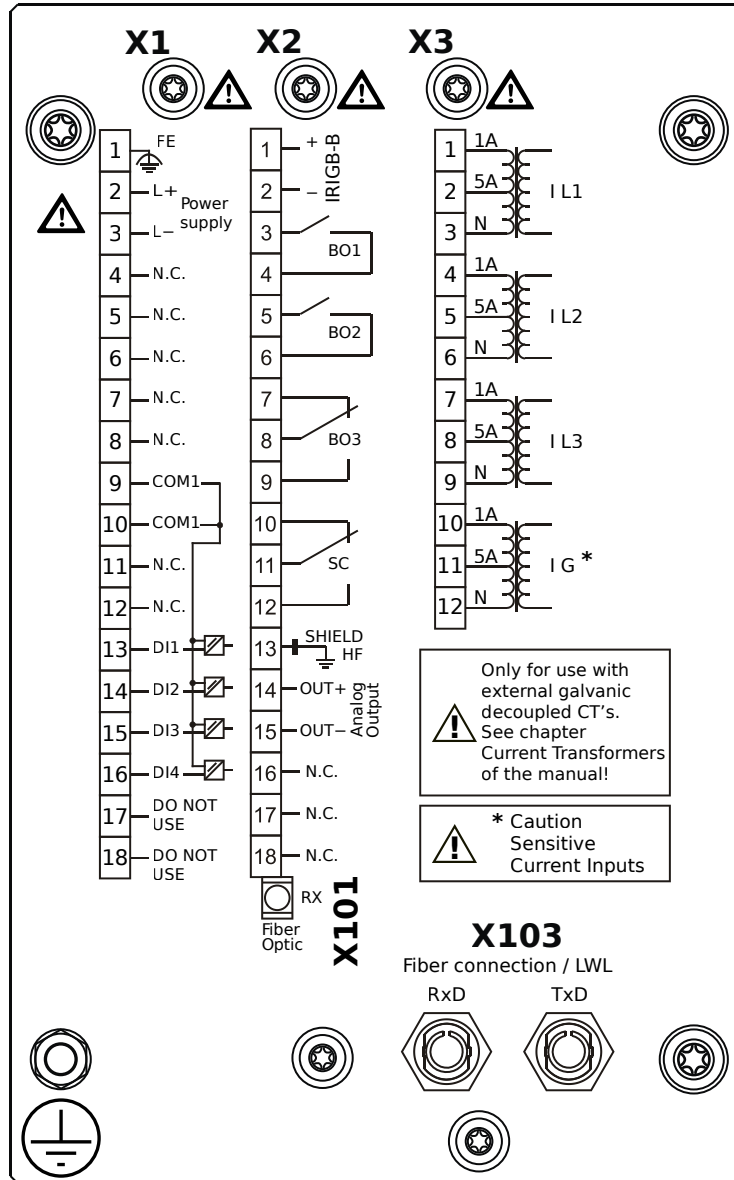

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2B1BDB

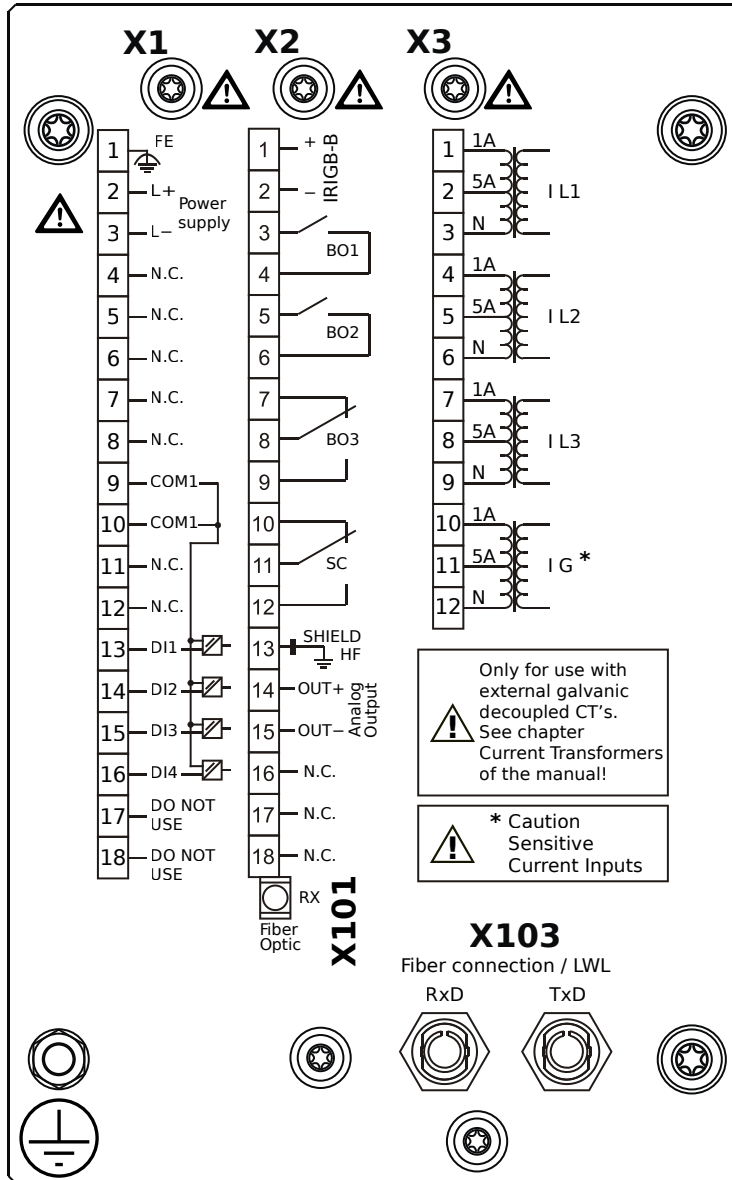

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, Fiber optics interface, ST Connector

MRM4-2B1BEA

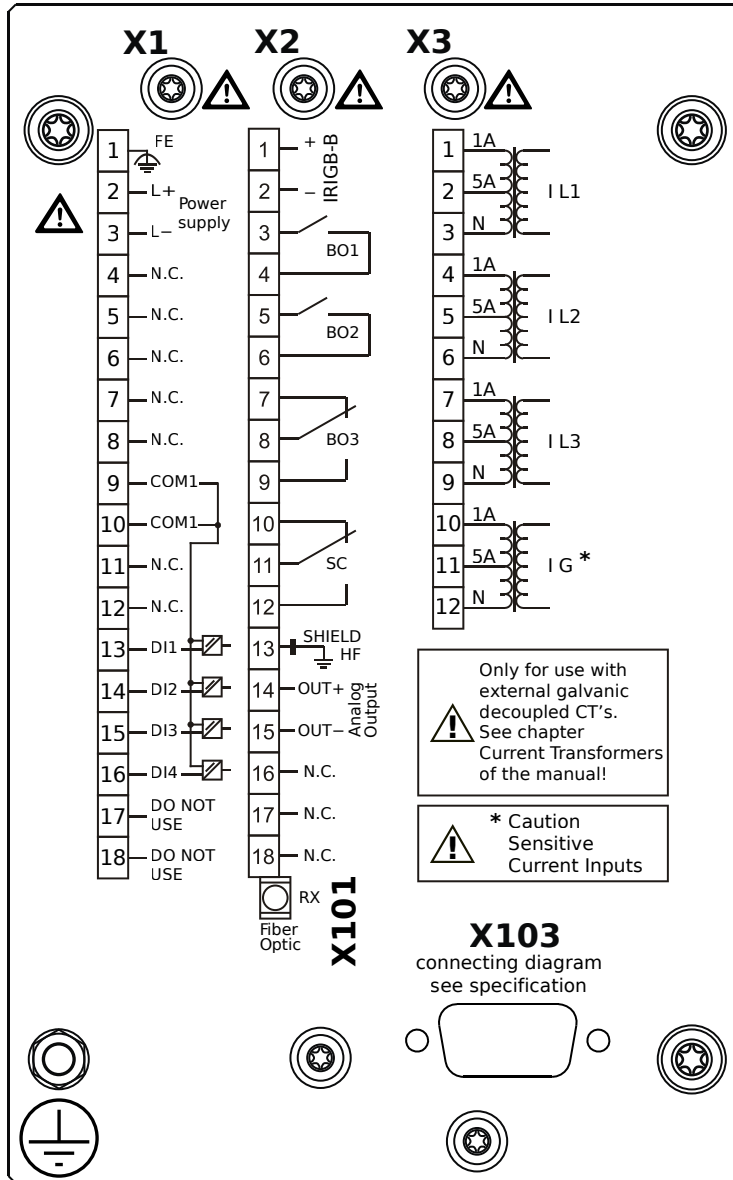

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, RS485, D-SUB

MRM4-2B1BEB

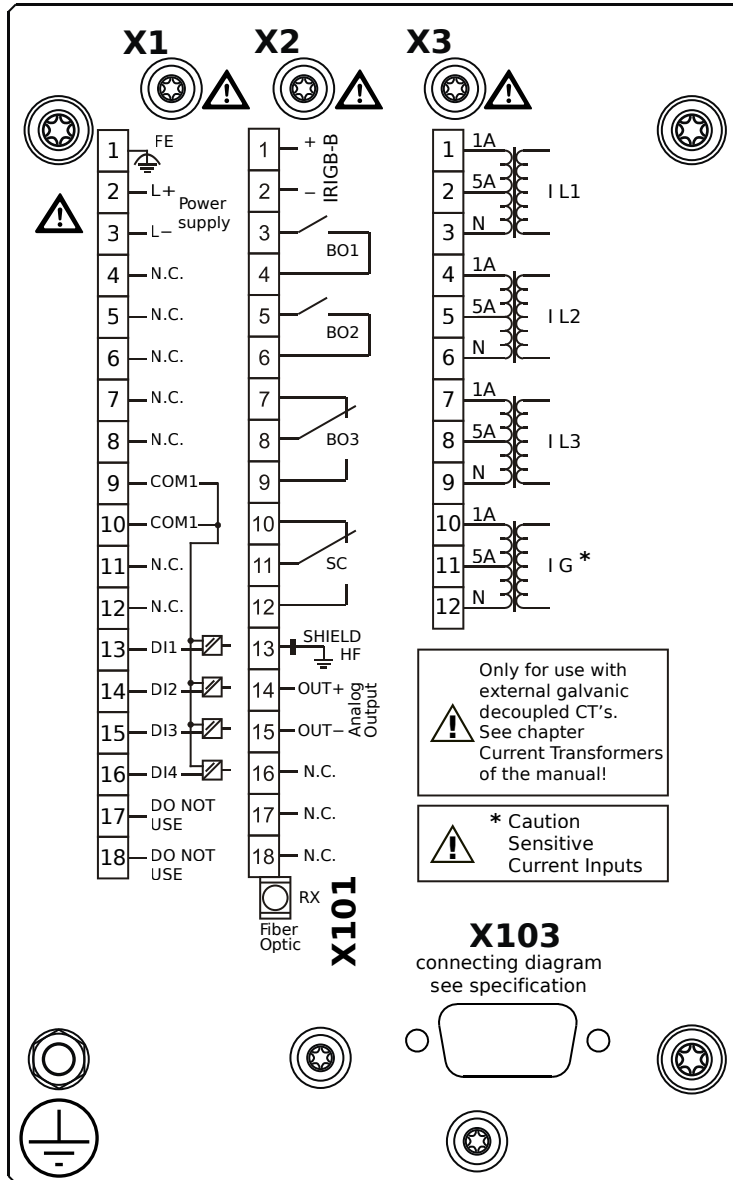

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Profibus-DP, RS485, D-SUB

MRM4-2B1BFA

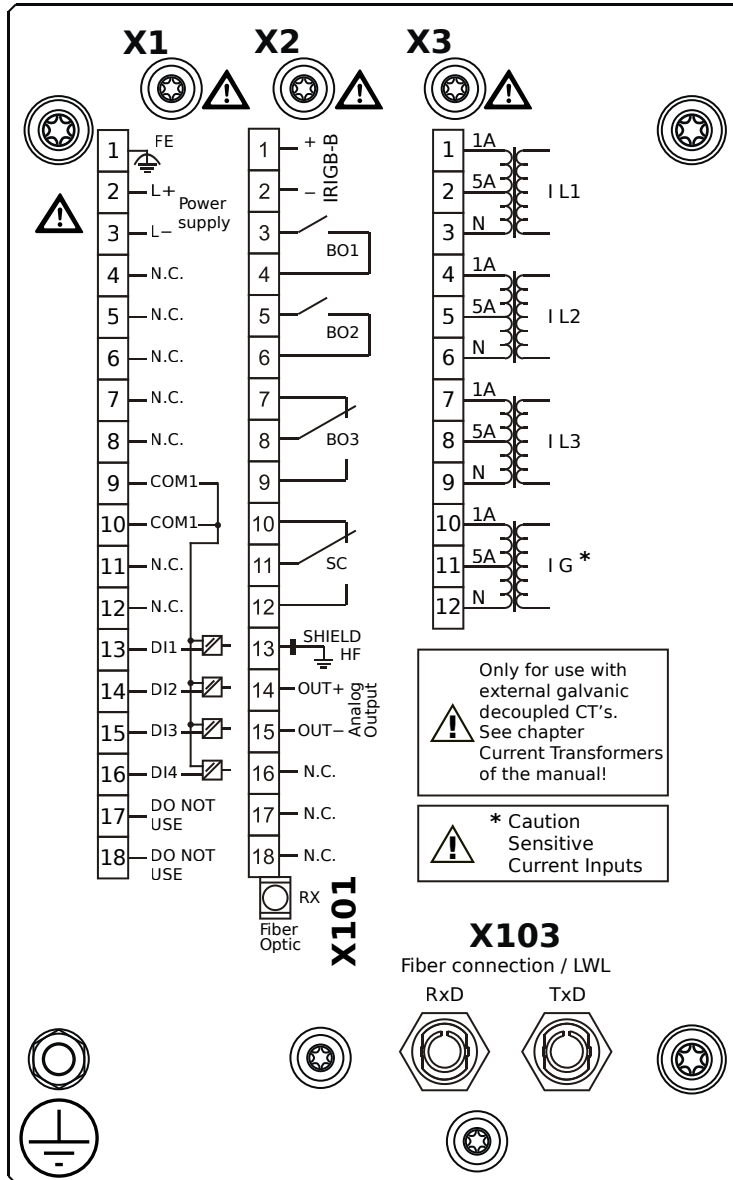

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2B1BFB

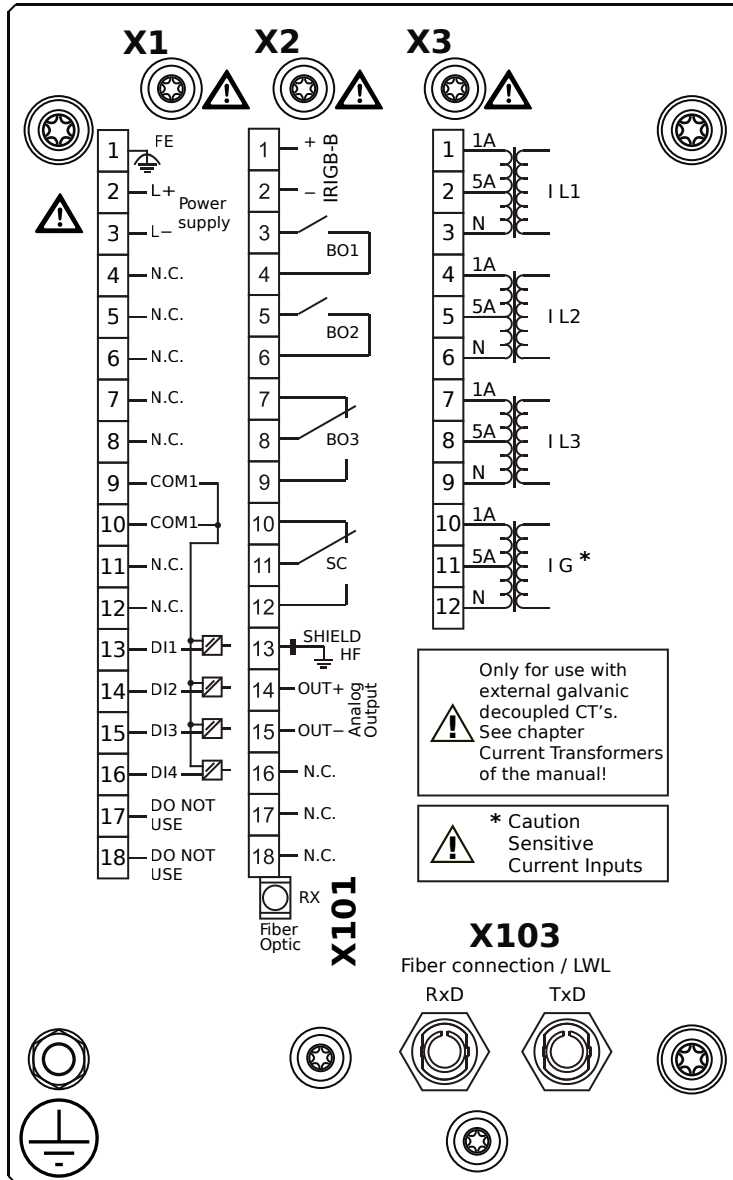

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, Fiber optics interface, ST Connector

MRM4-2B1BGA

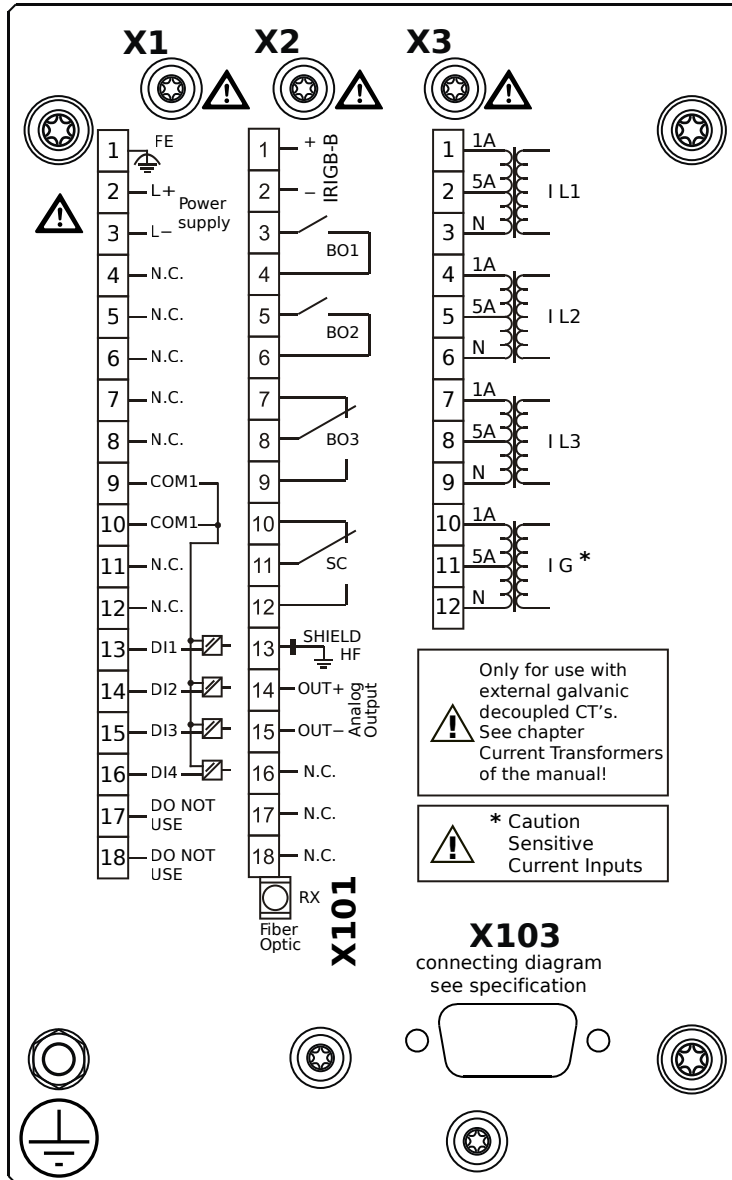

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2B1BGB

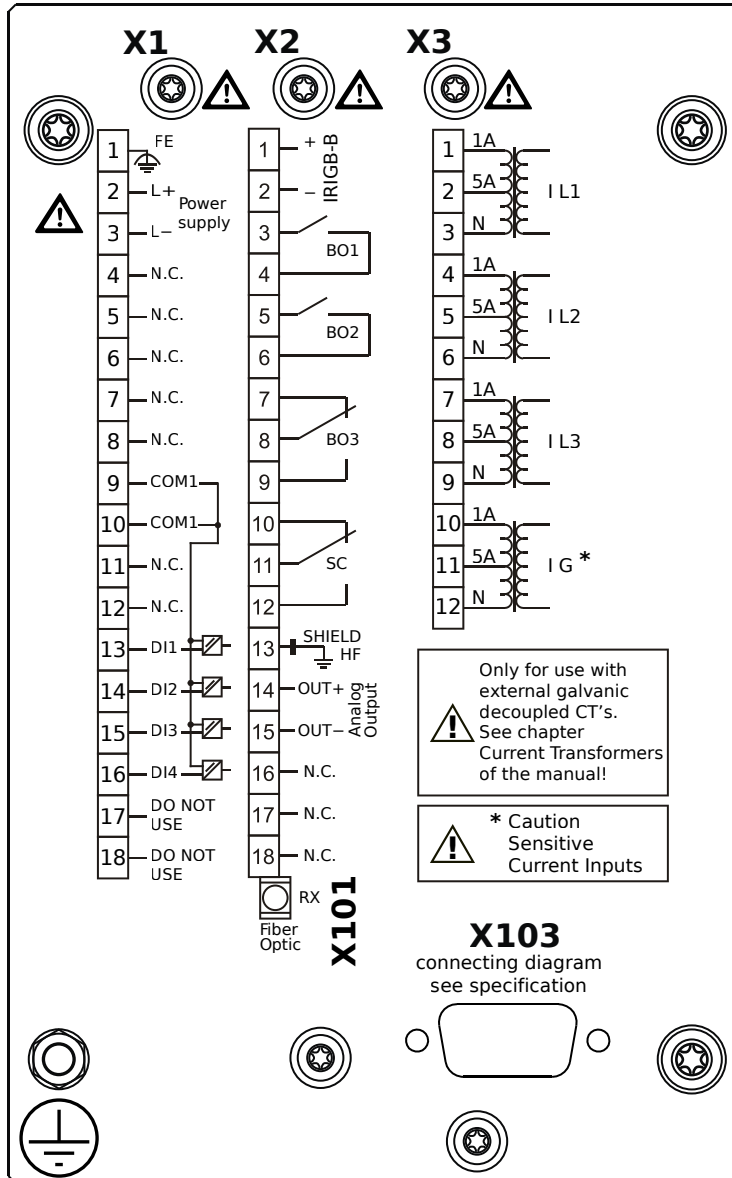

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus RTU / IEC 60870-5-103 / DNP3.0 RTU, RS485, D-SUB

MRM4-2B1BHA

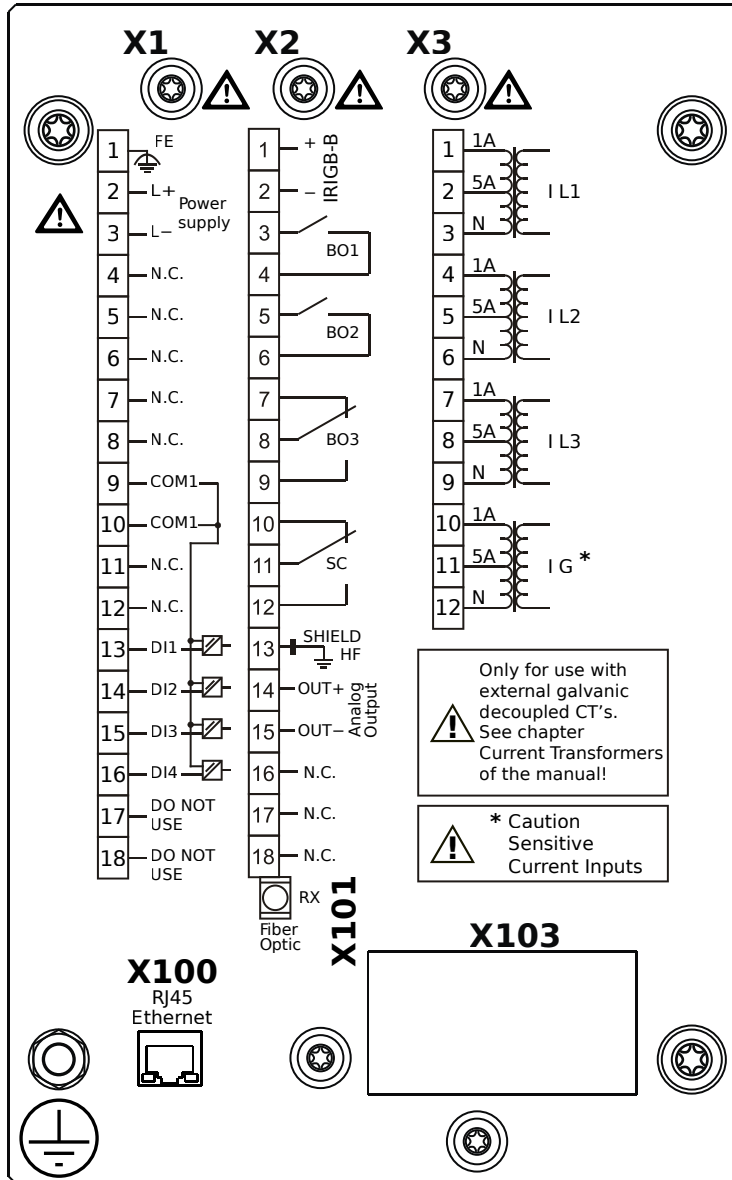

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1BHB

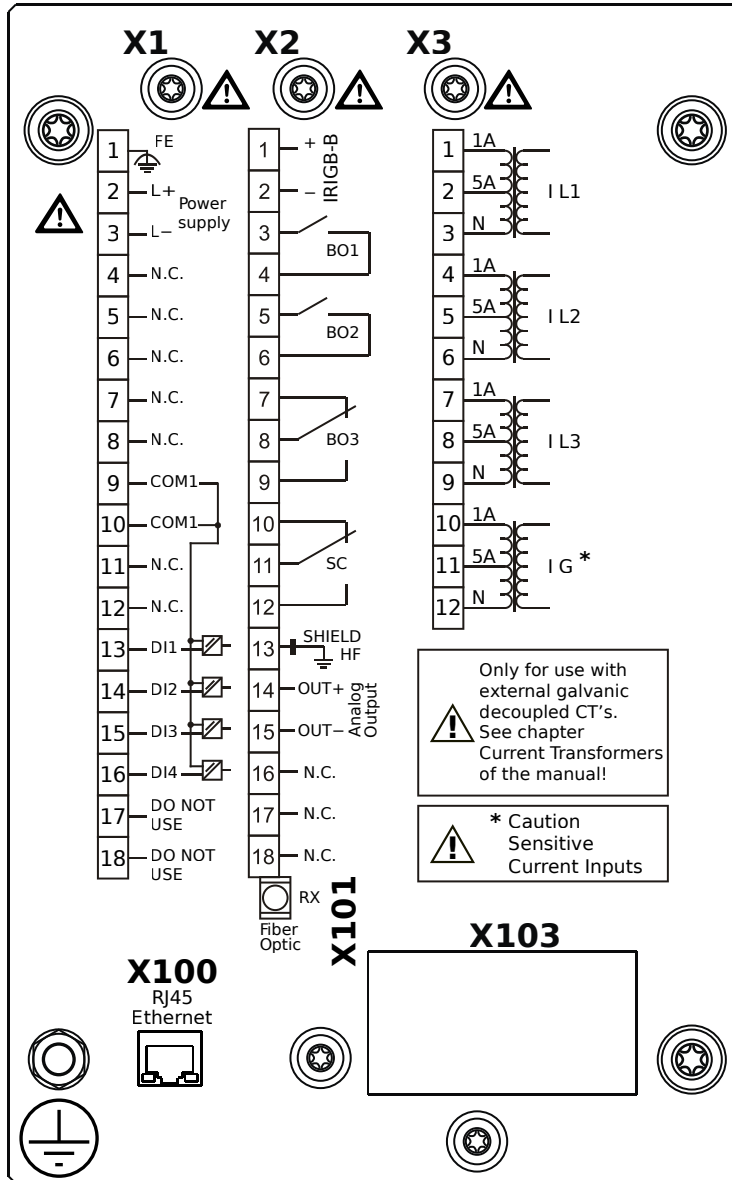

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

IRIG-B

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

FX)

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

MRM4-2B1BIA

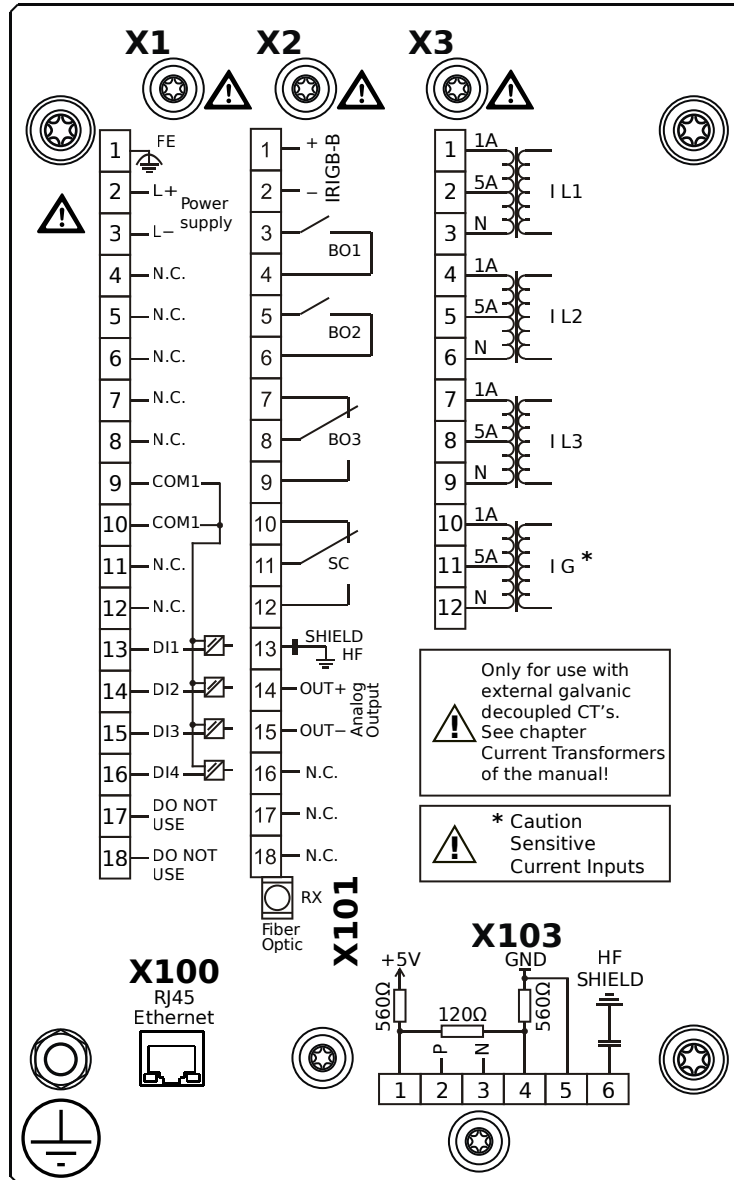

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B1BIB

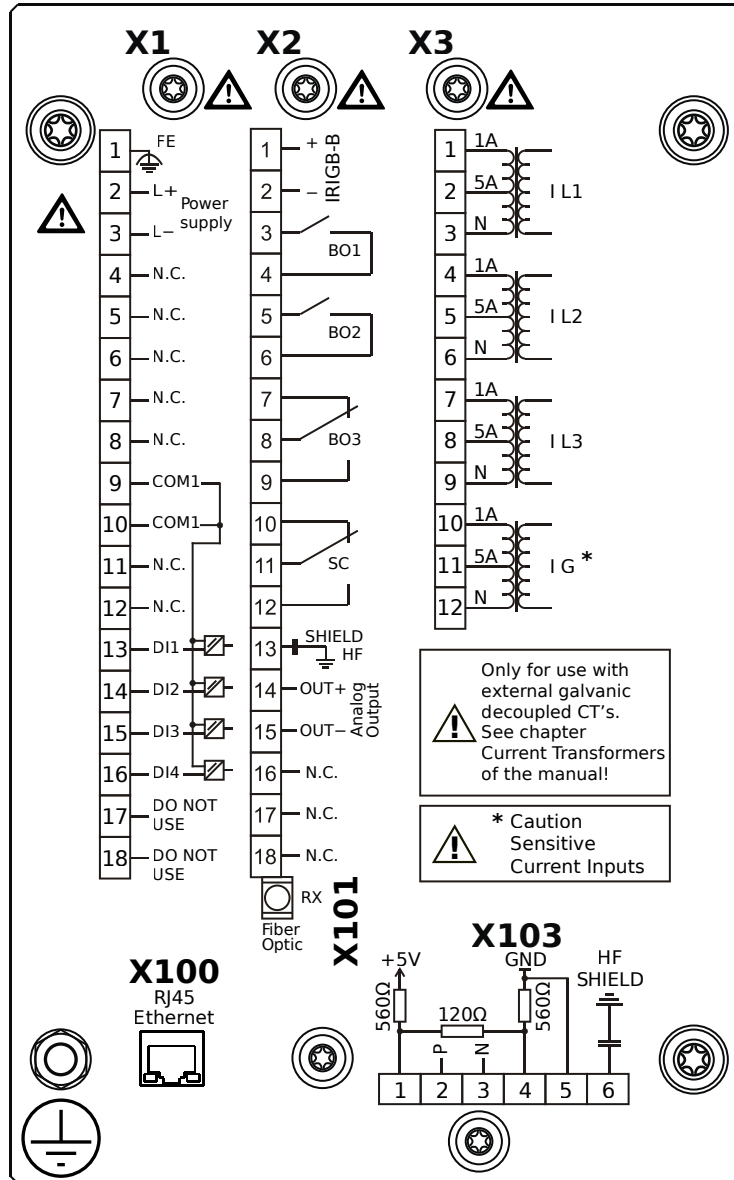

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B1BKA

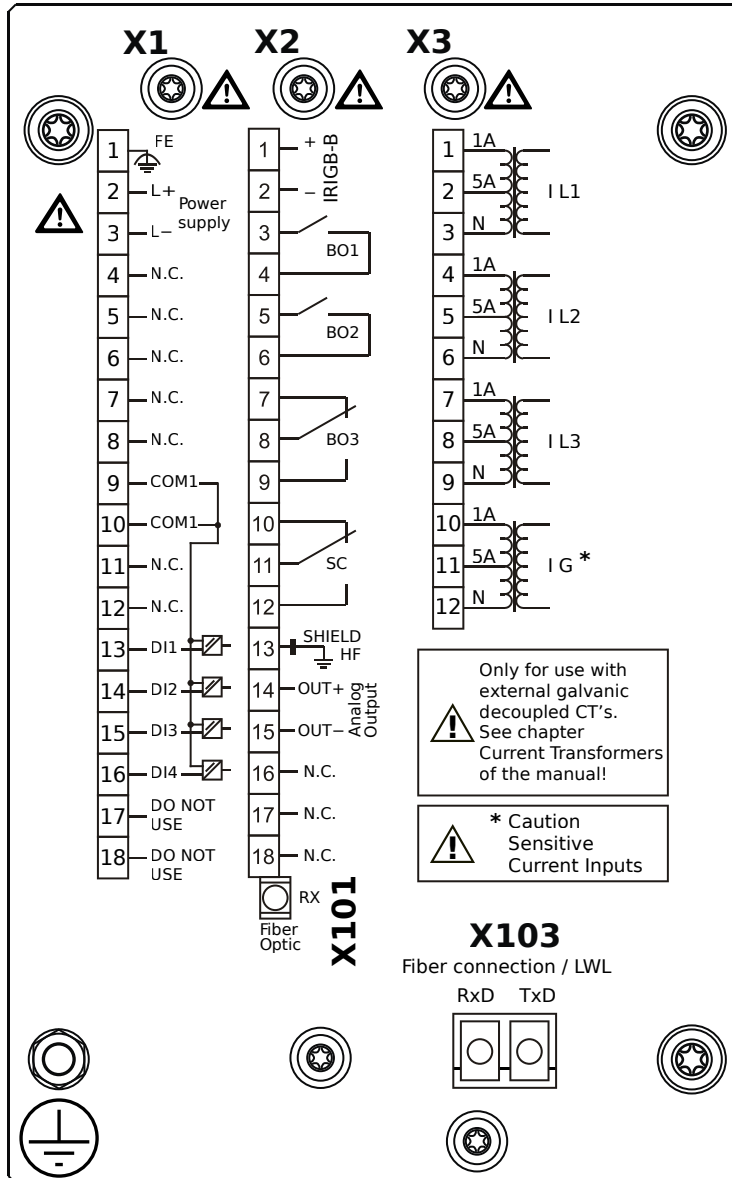

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B1BKB

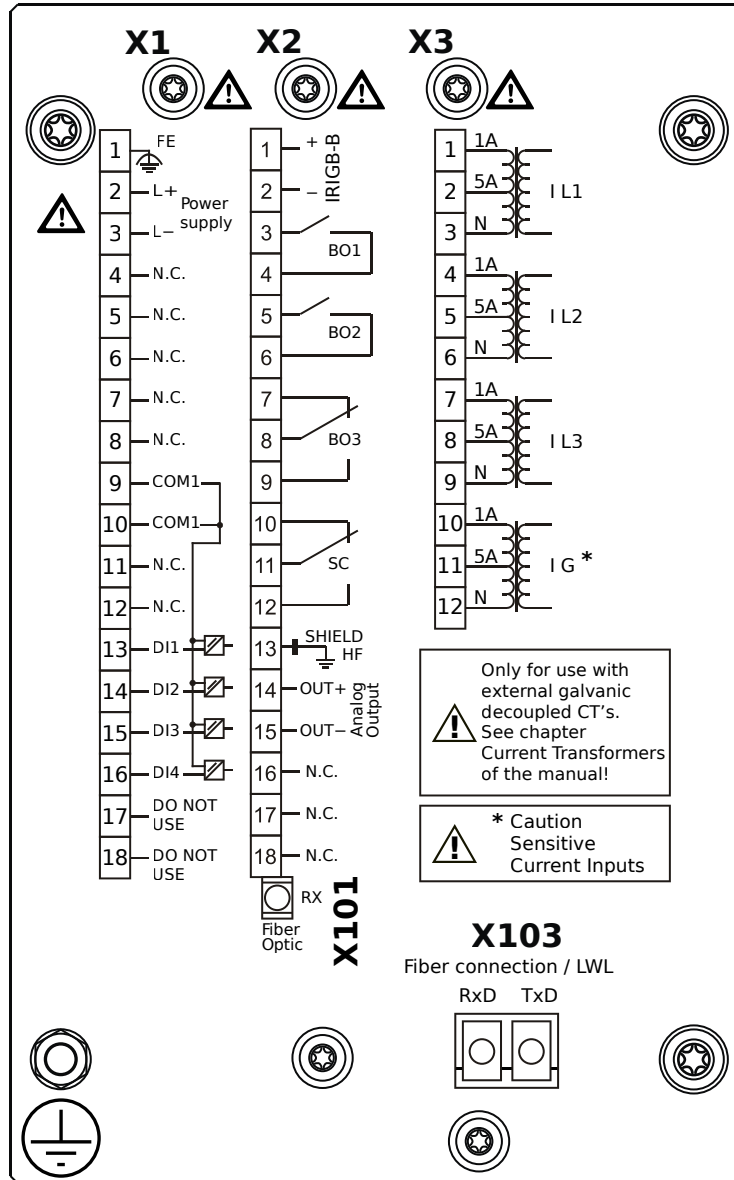

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B1BLA

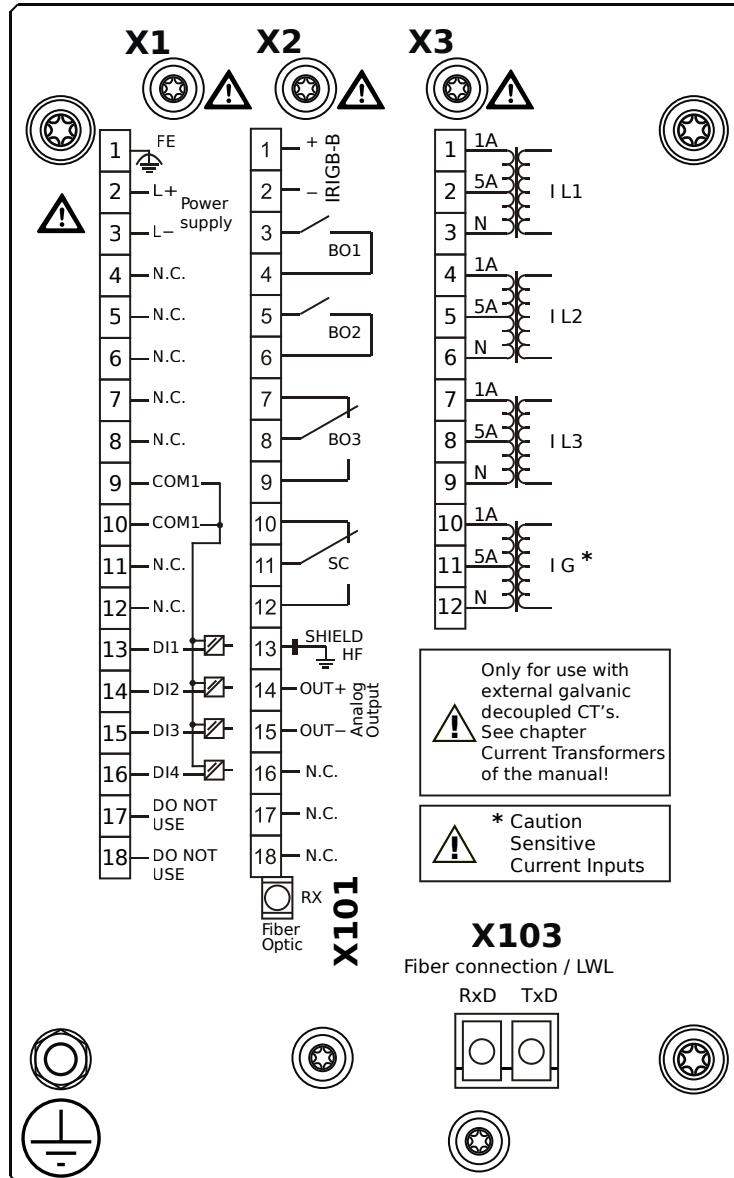

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B1BLB

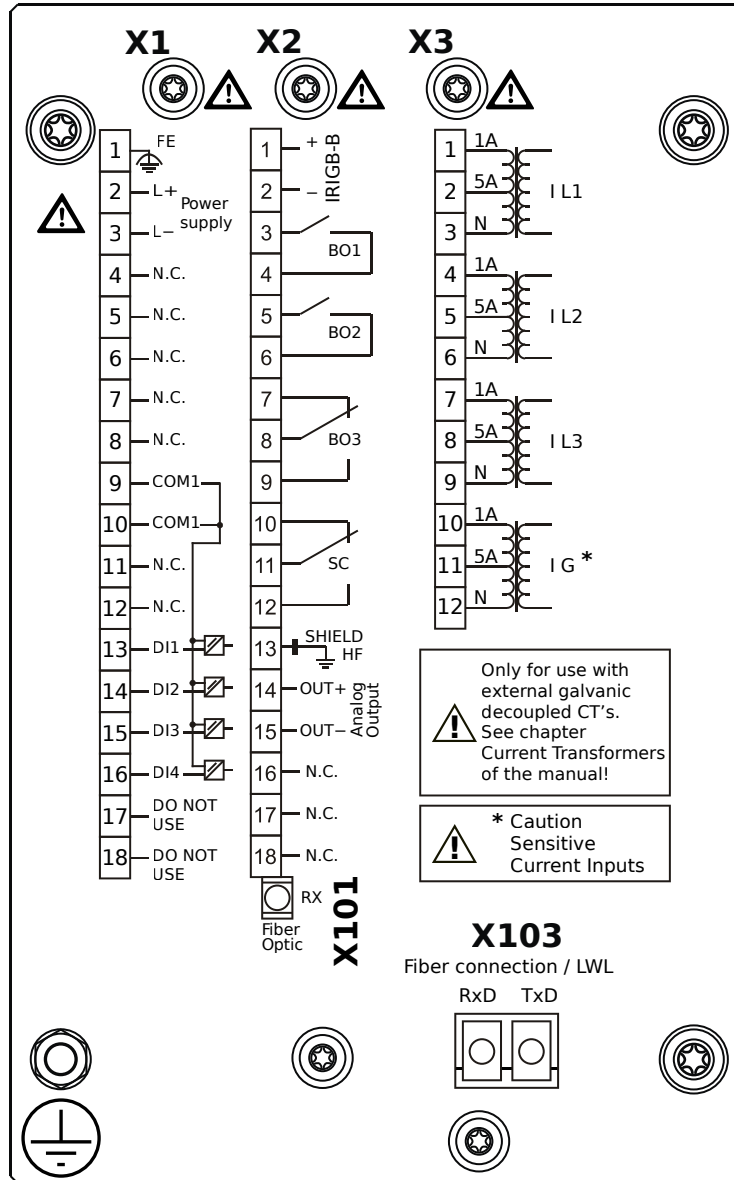

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Fiber optics interface, LC Connector

MRM4-2B1BOA

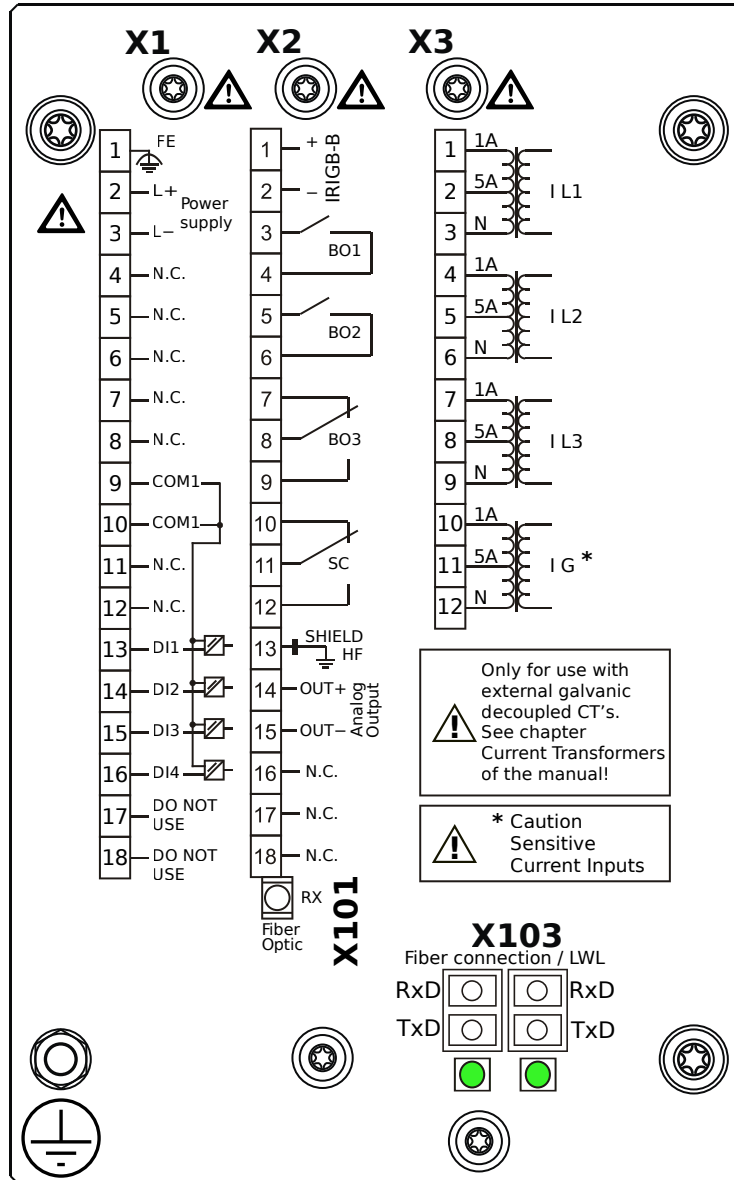

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B1BOB

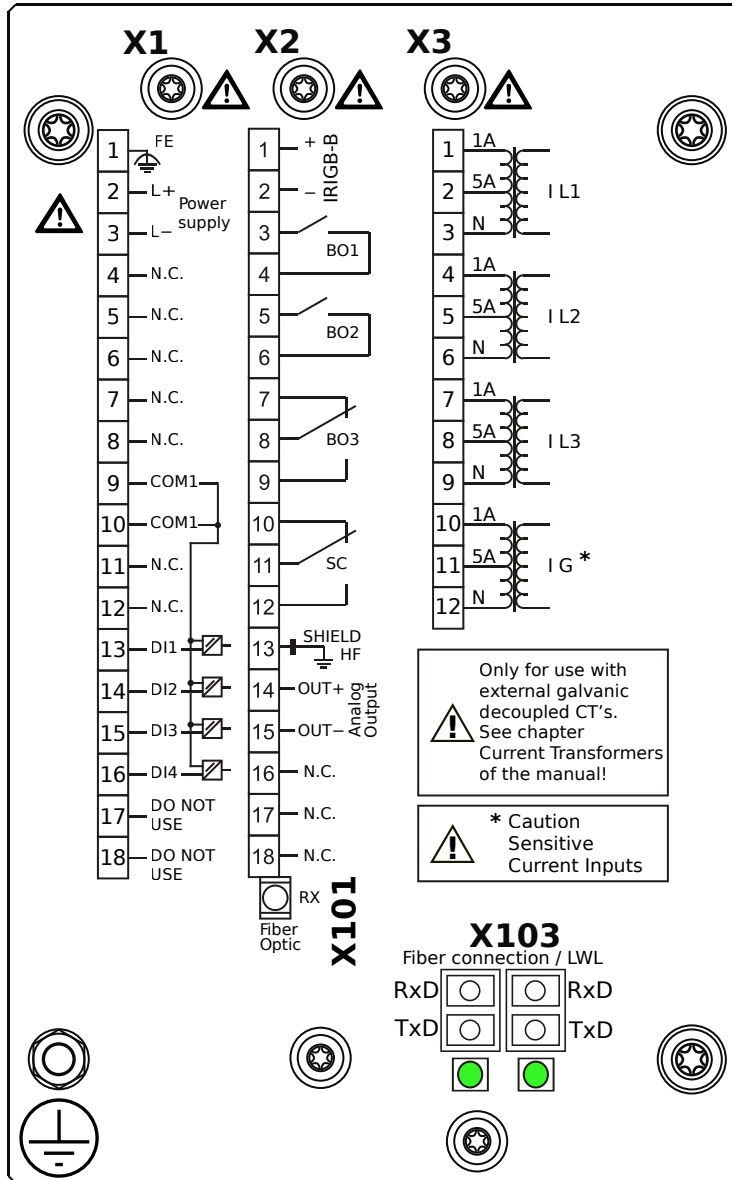

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B1BPA

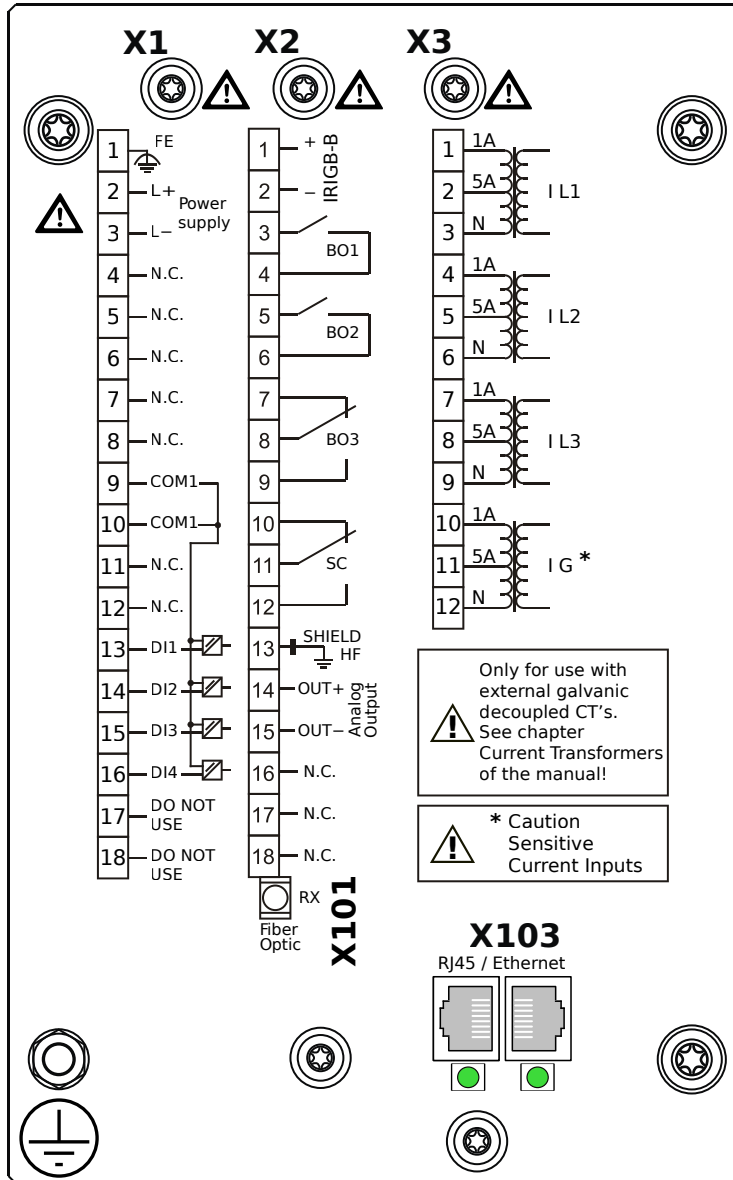

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B1BPB

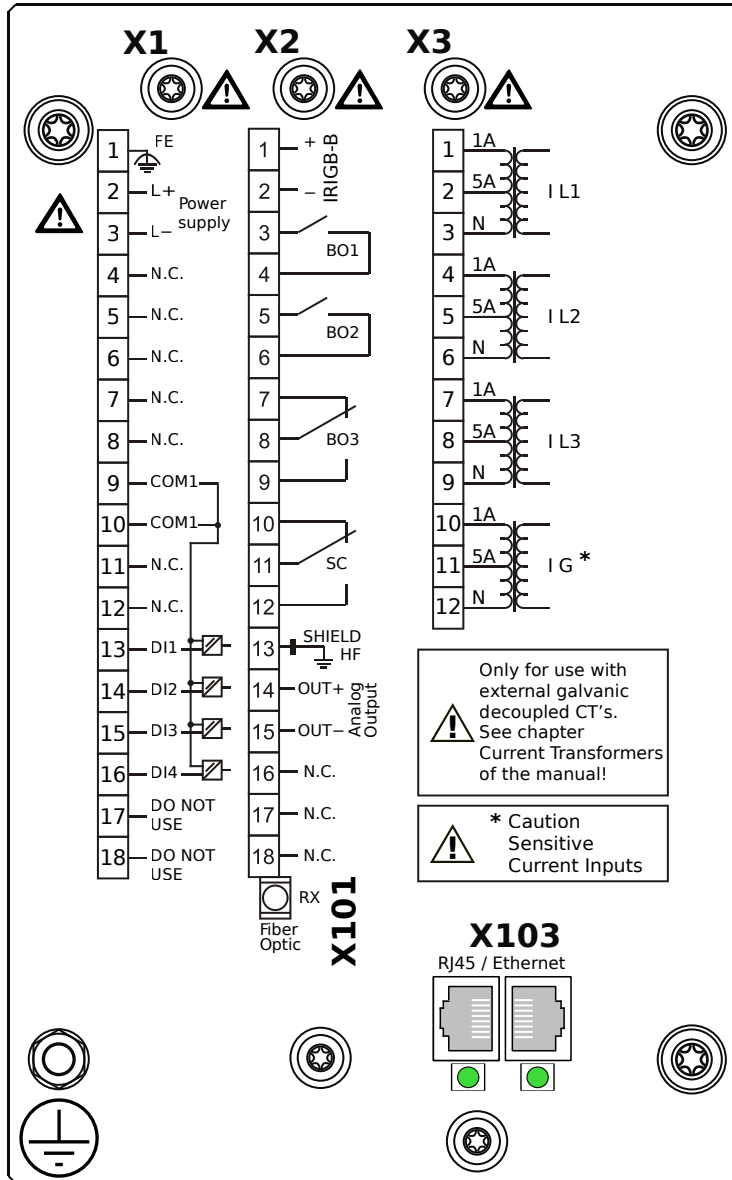

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B1BQA

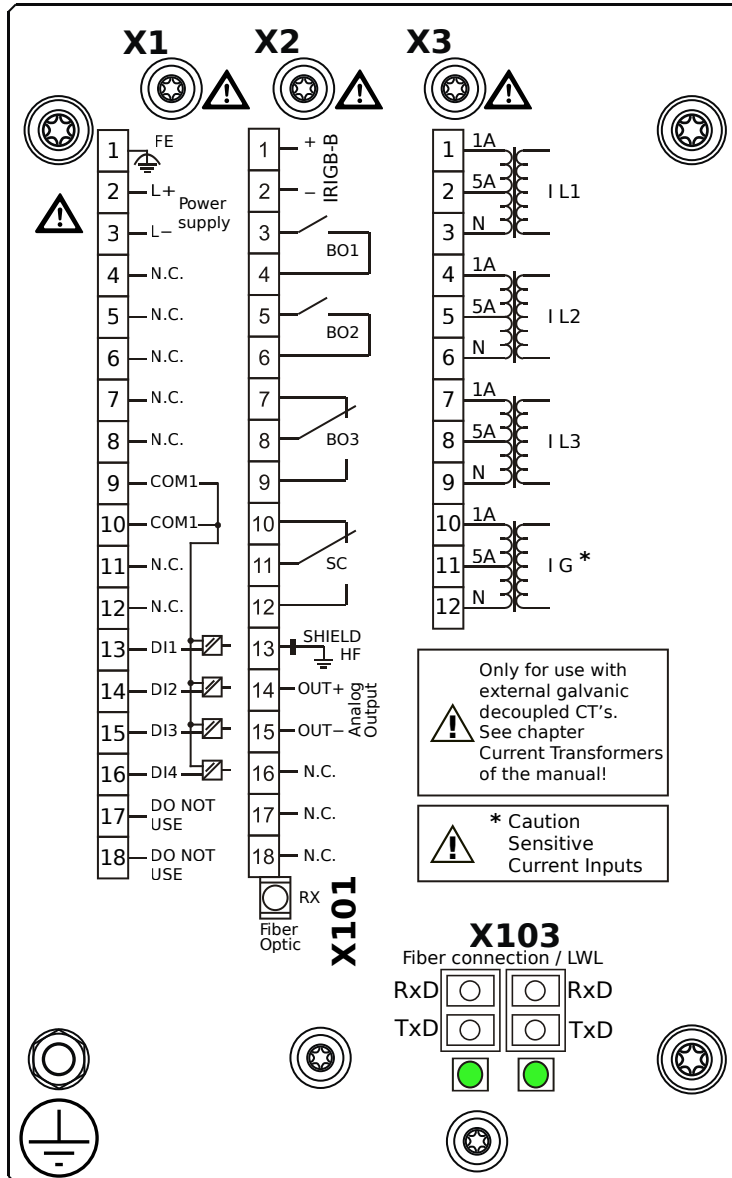

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B1BQB

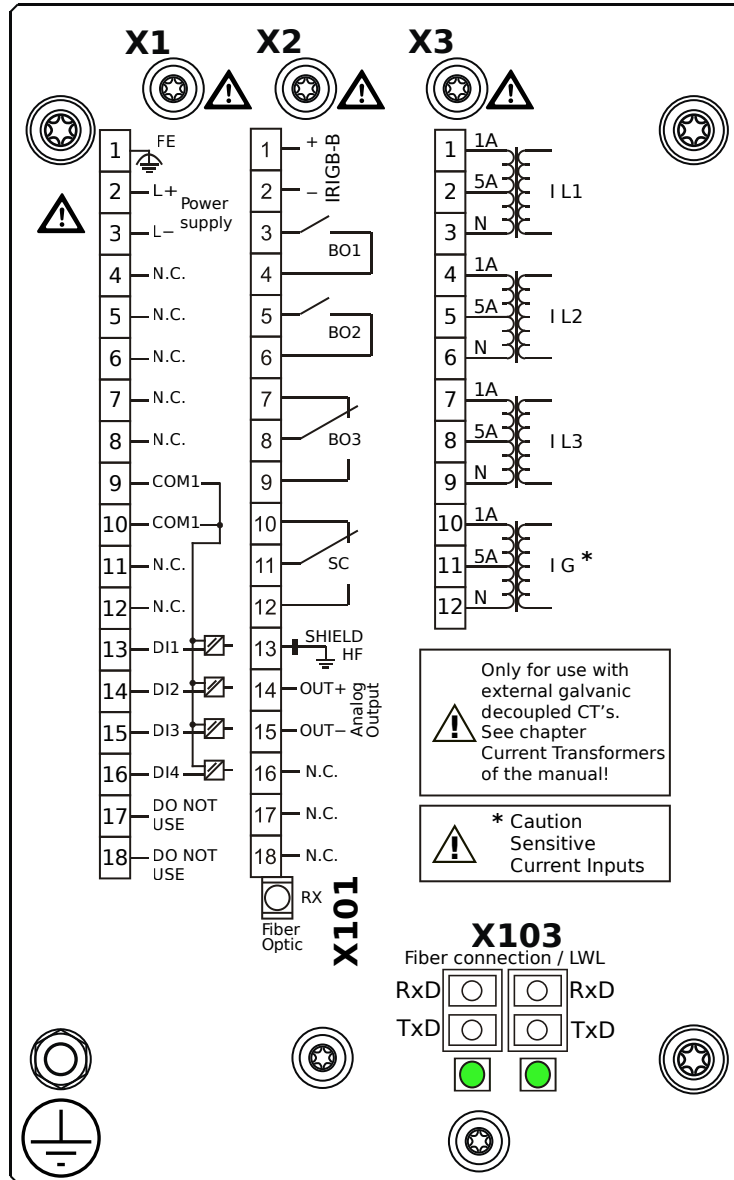

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,


IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Fiber optics interface, LC Connector

MRM4-2B1BRA

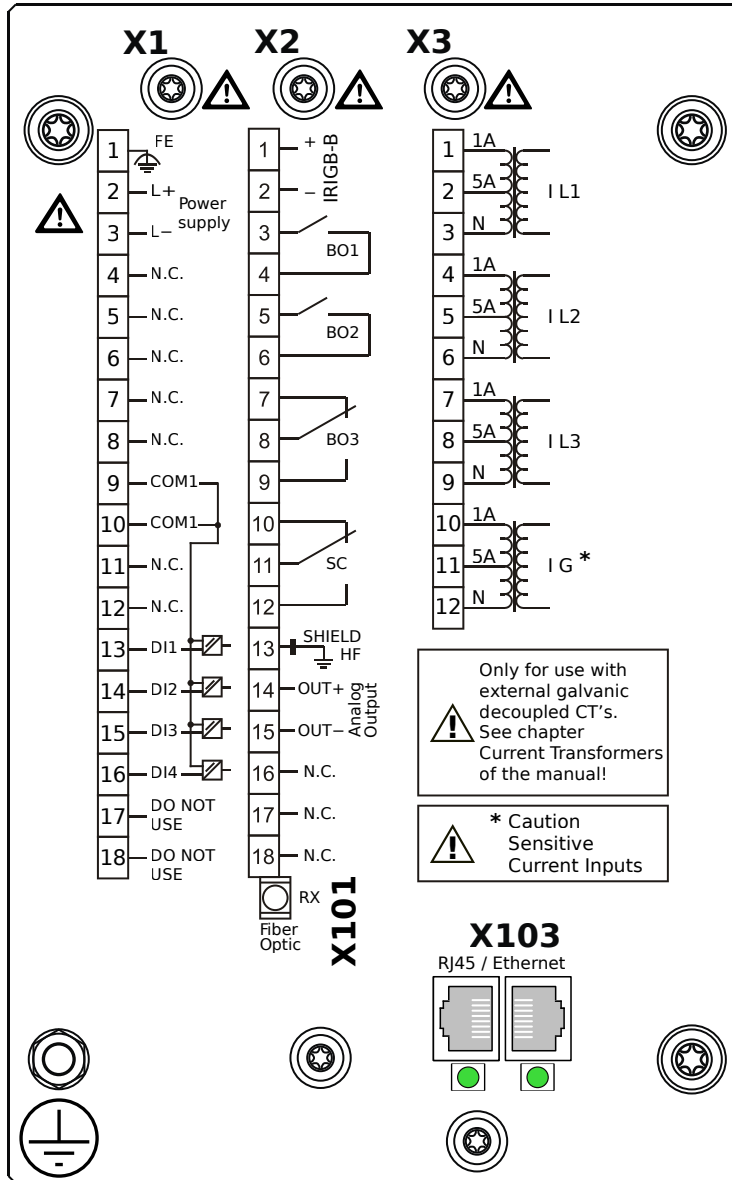

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B1BRB

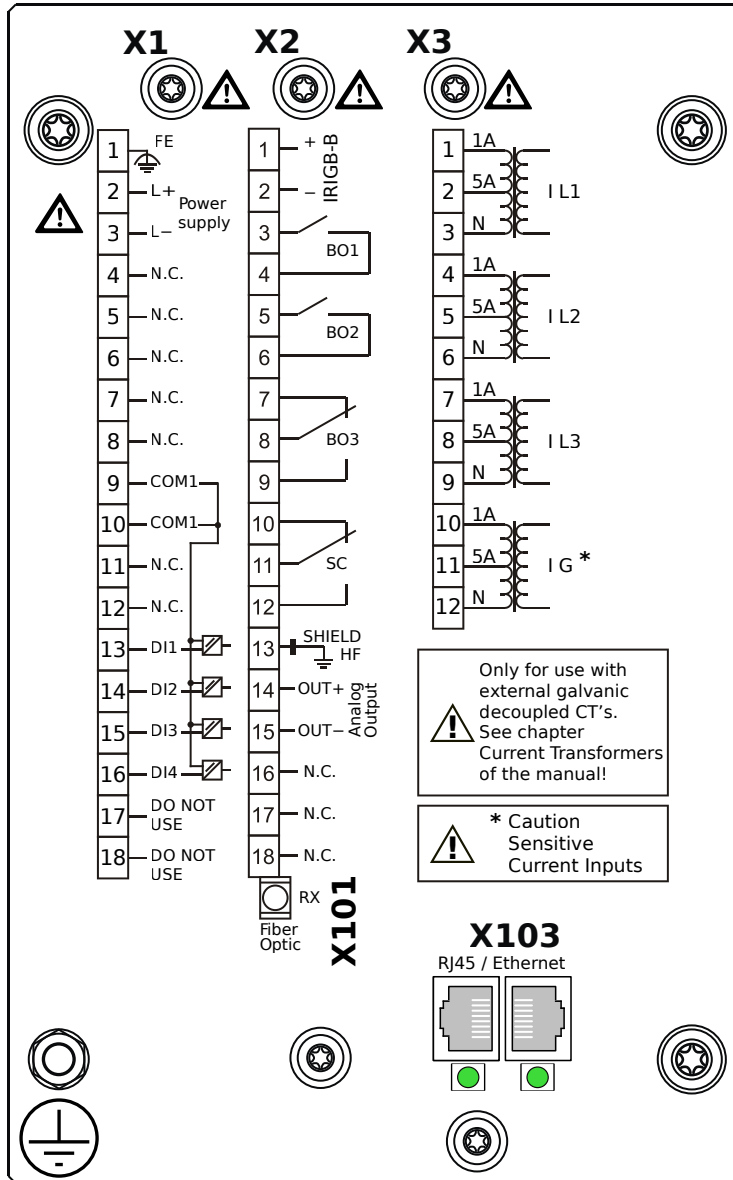

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs


X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Redundant Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

MRM4-2B1BTA

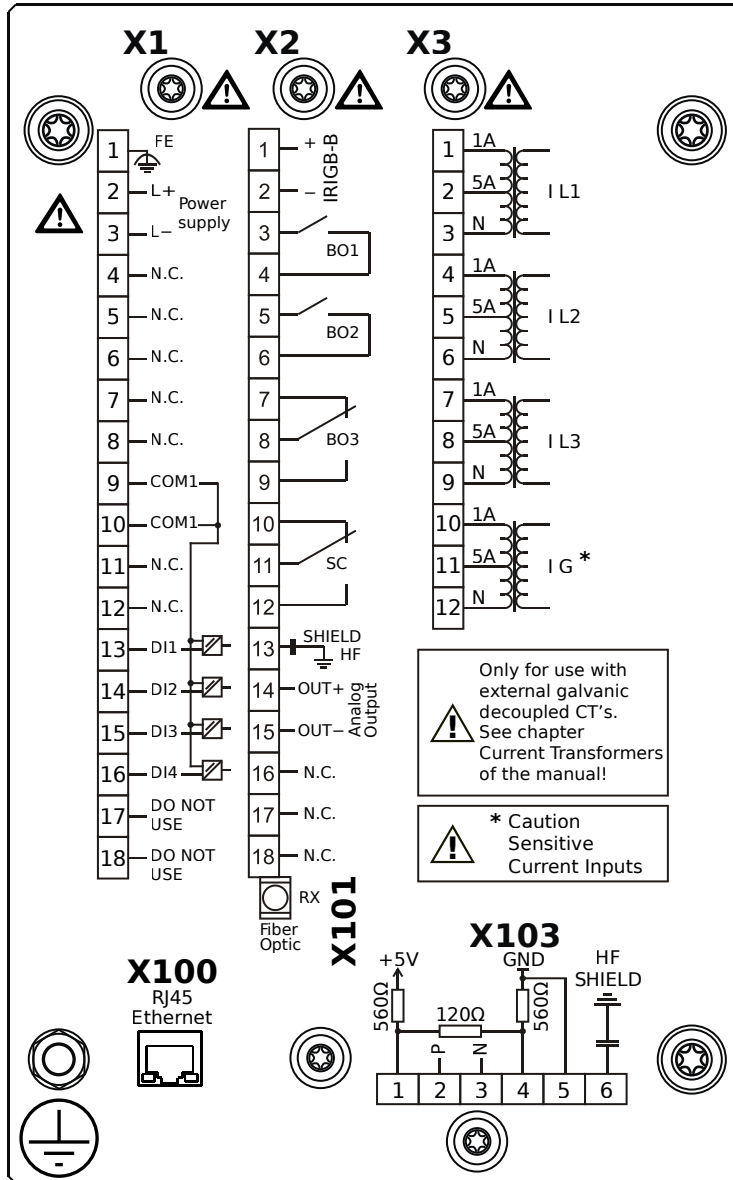

Housing B1, small display, 19" rack mounting

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output, IRIG-B


X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-FX)

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

MRM4-2B1BTB

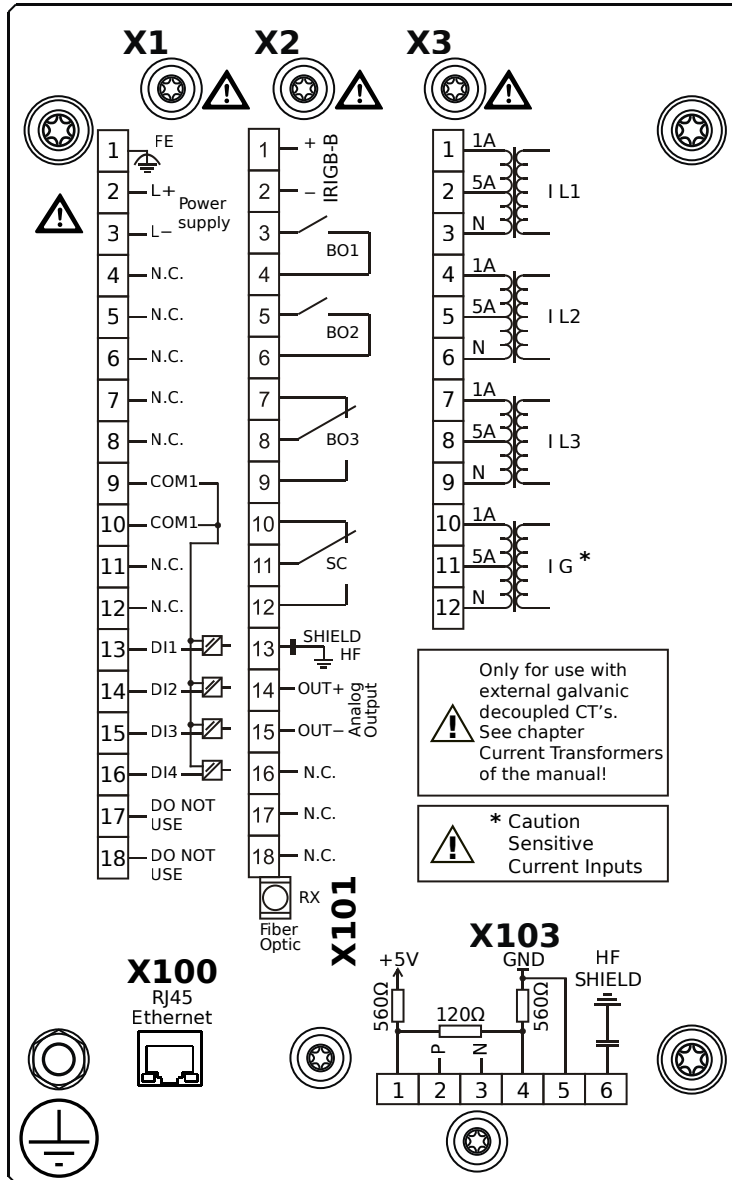

Housing B1, small display, 19" rack mounting

+ Conformal Coating (for installations in harsh environment)

X1 – DI4-X1: Wide-range power supply unit, incl. 4 grouped digital inputs

IRIG-B

X2 – OR3-AnO-Ir: Assembly Group with 3 Output Relays (2 NO / Form A, 1 Changeover / Form C), SC, Analog Output,

X3 – TIs: Standard phase current measuring card and sensitive ground current measuring

FX)

X100 – IEC 61850 / Modbus TCP / IEC 60870-5-104 / DNP3.0 TCP/UDP, Ethernet interface, 100 Mbit/s, RJ45 (BASE100-

X101 – Universal Resistance-Temperature Detector (URTD) input, Fiber optics interface, Versatile Link

X103 – IEC 60870-5-103 / Modbus RTU / DNP3.0 RTU, RS485, Terminals

Appendix – Legend

In this legend designations of various device types are listed, e.g. transformer protection, motor protection, generator protection, etc. Therefore it can occur that not every designation actually appears on the wiring diagram of your device.

PE	– Connection of protective earth (see chapter Grounding in the Technical Manual).
FE	– Connection of functional earth (see chapter Grounding in the Technical Manual).
Power Supply	– Connection for auxiliary power supply.
IL1	– Phase current input L1 (in some countries designated as IA).
IL2	– Phase current input L2 (in some countries designated as IB).
IL3	– Phase current input L3 (in some countries designated as IC).
ILx C–D	– WIC1 Test windings.
ILx S1–S2	– WIC1 phase current inputs.
IL1 W1 ... IL3 W1	– Phase current input L1...L3, winding side 1.
IL1 W2 ... IL3 W2	– Phase current input L1...L3, winding side 2.
IG	– Ground (earth) current input.
IG W1, IG W2	– Ground (earth) current input, winding side 1 / 2.
VL1	– Phase-to-neutral voltage L1 (in some countries designated as VA).
VL2	– Phase-to-neutral voltage L2 (in some countries designated as VB).
VL3	– Phase-to-neutral voltage L3 (in some countries designated as VC).
VL12	– Phase-to-phase voltage V12 (in some countries designated as VAB).
VL23	– Phase-to-phase voltage V23 (in some countries designated as VBC).
VL31	– Phase-to-phase voltage V31 (in some countries designated as VCA).
VX	– 4th voltage measuring input for measuring residual voltage or synchro-check.
BO	– Binary output relay.
NO / NC	– Contact output, normally open (Form A) / closed (Form B).
DI	– Digital input.
COM	– Common connection of digital inputs.
Out+, AnOut	– Analog output + (0/4...20 mA or 0...10 V).
In–, AnIn	– Analog input + (0/4...20 mA or 0...10 V).
n.c.	– Not connected.
DO NOT USE	– Do not use. (Caution: Non-usable internal wiring may exist.)
SC	– Self-supervision contact.
HF SHIELD	– Connection cable shield.
Fiber Optics / LWL	– Fiber optic connection.

High **PROTEC**

MRM4

WIRING DIAGRAMS

